



# Film Capacitors - Metallized Polyester (MKT)

**Series/Type: B32520 ... B32529**

The following products presented in this data sheet are being withdrawn.  
Please see the next 4 pages.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B32529D0475M289	B32529D5475M289	04.04.2014	15.07.2014	15.10.2014
B32529D0475M189	B32529D5475M189	04.04.2014	15.07.2014	15.10.2014
B32529D0475M000	B32529D5475M000	04.04.2014	15.07.2014	15.10.2014
B32529D0335M289	B32529D5335M289	04.04.2014	15.07.2014	15.10.2014
B32529D0335M189	B32529D5335M189	04.04.2014	15.07.2014	15.10.2014
B32529D0335M000	B32529D5335M000	04.04.2014	15.07.2014	15.10.2014
B32529D0335K289	B32529D5335K289	04.04.2014	15.07.2014	15.10.2014
B32529D0335K189	B32529D5335K189	04.04.2014	15.07.2014	15.10.2014
B32529D0335K000	B32529D5335K000	04.04.2014	15.07.2014	15.10.2014
B32529D0335J289	B32529D5335J289	04.04.2014	15.07.2014	15.10.2014
B32529D0335J189	B32529D5335J189	04.04.2014	15.07.2014	15.10.2014
B32529D0335J000	B32529D5335J000	04.04.2014	15.07.2014	15.10.2014
B32520C6682M289	B32529C6682M289	30.05.2014	31.08.2014	30.11.2014
B32520C6682M189	B32529C6682M189	30.05.2014	31.08.2014	30.11.2014
B32520C6682M000	B32529C6682M000	30.05.2014	31.08.2014	30.11.2014
B32520C6682K289	B32529C6682K289	30.05.2014	31.08.2014	30.11.2014
B32520C6682K189	B32529C6682K189	30.05.2014	31.08.2014	30.11.2014
B32520C6682K000	B32529C6682K000	30.05.2014	31.08.2014	30.11.2014
B32520C6682J289	B32529C6682J289	30.05.2014	31.08.2014	30.11.2014
B32520C6682J189	B32529C6682J189	30.05.2014	31.08.2014	30.11.2014
B32520C6682J000	B32529C6682J000	30.05.2014	31.08.2014	30.11.2014
B32520C6472M289	B32529C6472M289	30.05.2014	31.08.2014	30.11.2014
B32520C6472M189	B32529C6472M189	30.05.2014	31.08.2014	30.11.2014
B32520C6472M000	B32529C6472M000	30.05.2014	31.08.2014	30.11.2014
B32520C6472K289	B32529C6472K289	30.05.2014	31.08.2014	30.11.2014
B32520C6472K189	B32529C6472K189	30.05.2014	31.08.2014	30.11.2014
B32520C6472K000	B32529C6472K000	30.05.2014	31.08.2014	30.11.2014
B32520C6472J289	B32529C6472J289	30.05.2014	31.08.2014	30.11.2014
B32520C6472J189	B32529C6472J189	30.05.2014	31.08.2014	30.11.2014
B32520C6472J000	B32529C6472J000	30.05.2014	31.08.2014	30.11.2014
B32520C6332M289	B32529C6332M289	30.05.2014	31.08.2014	30.11.2014
B32520C6332M189	B32529C6332M189	30.05.2014	31.08.2014	30.11.2014
B32520C6332M000	B32529C6332M000	30.05.2014	31.08.2014	30.11.2014
B32520C6332K289	B32529C6332K289	30.05.2014	31.08.2014	30.11.2014
B32520C6332K189	B32529C6332K189	30.05.2014	31.08.2014	30.11.2014
B32520C6332K000	B32529C6332K000	30.05.2014	31.08.2014	30.11.2014
B32520C6332J289	B32529C6332J289	30.05.2014	31.08.2014	30.11.2014
B32520C6332J189	B32529C6332J189	30.05.2014	31.08.2014	30.11.2014
B32520C6332J000	B32529C6332J000	30.05.2014	31.08.2014	30.11.2014
B32520C6222M289	B32529C6222M289	30.05.2014	31.08.2014	30.11.2014
B32520C6222M189	B32529C6222M189	30.05.2014	31.08.2014	30.11.2014
B32520C6222M000	B32529C6222M000	30.05.2014	31.08.2014	30.11.2014
B32520C6222K289	B32529C6222K289	30.05.2014	31.08.2014	30.11.2014
B32520C6222K189	B32529C6222K189	30.05.2014	31.08.2014	30.11.2014
B32520C6222K000	B32529C6222K000	30.05.2014	31.08.2014	30.11.2014
B32520C6222J289	B32529C6222J289	30.05.2014	31.08.2014	30.11.2014
B32520C6222J189	B32529C6222J189	30.05.2014	31.08.2014	30.11.2014

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B32520C6222J000	B32529C6222J000	30.05.2014	31.08.2014	30.11.2014
B32520C6152M289	B32529C6152M289	30.05.2014	31.08.2014	30.11.2014
B32520C6152M189	B32529C6152M189	30.05.2014	31.08.2014	30.11.2014
B32520C6152M000	B32529C6152M000	30.05.2014	31.08.2014	30.11.2014
B32520C6152K289	B32529C6152K289	30.05.2014	31.08.2014	30.11.2014
B32520C6152K189	B32529C6152K189	30.05.2014	31.08.2014	30.11.2014
B32520C6152K000	B32529C6152K000	30.05.2014	31.08.2014	30.11.2014
B32520C6152J289	B32529C6152J289	30.05.2014	31.08.2014	30.11.2014
B32520C6152J189	B32529C6152J189	30.05.2014	31.08.2014	30.11.2014
B32520C6152J000	B32529C6152J000	30.05.2014	31.08.2014	30.11.2014
B32520C6103M289	B32529C6103M289	30.05.2014	31.08.2014	30.11.2014
B32520C6103M189	B32529C6103M189	30.05.2014	31.08.2014	30.11.2014
B32520C6103M000	B32529C6103M000	30.05.2014	31.08.2014	30.11.2014
B32520C6103K289	B32529C6103K289	30.05.2014	31.08.2014	30.11.2014
B32520C6103K189	B32529C6103K189	30.05.2014	31.08.2014	30.11.2014
B32520C6103K000	B32529C6103K000	30.05.2014	31.08.2014	30.11.2014
B32520C6103J289	B32529C6103J289	30.05.2014	31.08.2014	30.11.2014
B32520C6103J189	B32529C6103J189	30.05.2014	31.08.2014	30.11.2014
B32520C6103J000	B32529C6103J000	30.05.2014	31.08.2014	30.11.2014
B32520C6102M289	B32529C6102M289	30.05.2014	31.08.2014	30.11.2014
B32520C6102M189	B32529C6102M189	30.05.2014	31.08.2014	30.11.2014
B32520C6102M000	B32529C6102M000	30.05.2014	31.08.2014	30.11.2014
B32520C6102K289	B32529C6102K289	30.05.2014	31.08.2014	30.11.2014
B32520C6102K189	B32529C6102K189	30.05.2014	31.08.2014	30.11.2014
B32520C6102K000	B32529C6102K000	30.05.2014	31.08.2014	30.11.2014
B32520C6102J289	B32529C6102J289	30.05.2014	31.08.2014	30.11.2014
B32520C6102J189	B32529C6102J189	30.05.2014	31.08.2014	30.11.2014
B32520C6102J000	B32529C6102J000	30.05.2014	31.08.2014	30.11.2014
B32520C3473M289	B32529C3473M289	30.05.2014	31.08.2014	30.11.2014
B32520C3473M189	B32529C3473M189	30.05.2014	31.08.2014	30.11.2014
B32520C3473M000	B32529C3473M000	30.05.2014	31.08.2014	30.11.2014
B32520C3473K289	B32529C3473K289	30.05.2014	31.08.2014	30.11.2014
B32520C3473K189	B32529C3473K189	30.05.2014	31.08.2014	30.11.2014
B32520C3473K000	B32529C3473K000	30.05.2014	31.08.2014	30.11.2014
B32520C3473J289	B32529C3473J289	30.05.2014	31.08.2014	30.11.2014
B32520C3473J189	B32529C3473J189	30.05.2014	31.08.2014	30.11.2014
B32520C3473J000	B32529C3473J000	30.05.2014	31.08.2014	30.11.2014
B32520C3333M289	B32529C3333M289	30.05.2014	31.08.2014	30.11.2014
B32520C3333M189	B32529C3333M189	30.05.2014	31.08.2014	30.11.2014
B32520C3333M000	B32529C3333M000	30.05.2014	31.08.2014	30.11.2014
B32520C3333K289	B32529C3333K289	30.05.2014	31.08.2014	30.11.2014
B32520C3333K189	B32529C3333K189	30.05.2014	31.08.2014	30.11.2014
B32520C3333K000	B32529C3333K000	30.05.2014	31.08.2014	30.11.2014
B32520C3333J289	B32529C3333J289	30.05.2014	31.08.2014	30.11.2014
B32520C3333J189	B32529C3333J189	30.05.2014	31.08.2014	30.11.2014
B32520C3333J000	B32529C3333J000	30.05.2014	31.08.2014	30.11.2014
B32520C3223M289	B32529C3223M289	30.05.2014	31.08.2014	30.11.2014

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B32520C3223M189	B32529C3223M189	30.05.2014	31.08.2014	30.11.2014
B32520C3223M000	B32529C3223M000	30.05.2014	31.08.2014	30.11.2014
B32520C3223K289	B32529C3223K289	30.05.2014	31.08.2014	30.11.2014
B32520C3223K189	B32529C3223K189	30.05.2014	31.08.2014	30.11.2014
B32520C3223K000	B32529C3223K000	30.05.2014	31.08.2014	30.11.2014
B32520C3223J289	B32529C3223J289	30.05.2014	31.08.2014	30.11.2014
B32520C3223J189	B32529C3223J189	30.05.2014	31.08.2014	30.11.2014
B32520C3223J000	B32529C3223J000	30.05.2014	31.08.2014	30.11.2014
B32520C3153M289	B32529C3153M289	30.05.2014	31.08.2014	30.11.2014
B32520C3153M189	B32529C3153M189	30.05.2014	31.08.2014	30.11.2014
B32520C3153M000	B32529C3153M000	30.05.2014	31.08.2014	30.11.2014
B32520C3153K289	B32529C3153K289	30.05.2014	31.08.2014	30.11.2014
B32520C3153K189	B32529C3153K189	30.05.2014	31.08.2014	30.11.2014
B32520C3153K000	B32529C3153K000	30.05.2014	31.08.2014	30.11.2014
B32520C3153J289	B32529C3153J289	30.05.2014	31.08.2014	30.11.2014
B32520C3153J189	B32529C3153J189	30.05.2014	31.08.2014	30.11.2014
B32520C3153J000	B32529C3153J000	30.05.2014	31.08.2014	30.11.2014
B32520C1683M289	B32529C1683M289	30.05.2014	31.08.2014	30.11.2014
B32520C1683M189	B32529C1683M189	30.05.2014	31.08.2014	30.11.2014
B32520C1683M000	B32529C1683M000	30.05.2014	31.08.2014	30.11.2014
B32520C1683K289	B32529C1683K289	30.05.2014	31.08.2014	30.11.2014
B32520C1683K189	B32529C1683K189	30.05.2014	31.08.2014	30.11.2014
B32520C1683K000	B32529C1683K000	30.05.2014	31.08.2014	30.11.2014
B32520C1683J289	B32529C1683J289	30.05.2014	31.08.2014	30.11.2014
B32520C1683J189	B32529C1683J189	30.05.2014	31.08.2014	30.11.2014
B32520C1683J000	B32529C1683J000	30.05.2014	31.08.2014	30.11.2014
B32520C1473M289	B32529C1473M289	30.05.2014	31.08.2014	30.11.2014
B32520C1473M189	B32529C1473M189	30.05.2014	31.08.2014	30.11.2014
B32520C1473M000	B32529C1473M000	30.05.2014	31.08.2014	30.11.2014
B32520C1473K289	B32529C1473K289	30.05.2014	31.08.2014	30.11.2014
B32520C1473K189	B32529C1473K189	30.05.2014	31.08.2014	30.11.2014
B32520C1473K000	B32529C1473K000	30.05.2014	31.08.2014	30.11.2014
B32520C1473J289	B32529C1473J289	30.05.2014	31.08.2014	30.11.2014
B32520C1473J189	B32529C1473J189	30.05.2014	31.08.2014	30.11.2014
B32520C1473J000	B32529C1473J000	30.05.2014	31.08.2014	30.11.2014
B32520C1104M289	B32529C1104M289	30.05.2014	31.08.2014	30.11.2014
B32520C1104M189	B32529C1104M189	30.05.2014	31.08.2014	30.11.2014
B32520C1104M000	B32529C1104M000	30.05.2014	31.08.2014	30.11.2014
B32520C1104K289	B32529C1104K289	30.05.2014	31.08.2014	30.11.2014
B32520C1104K189	B32529C1104K189	30.05.2014	31.08.2014	30.11.2014
B32520C1104K000	B32529C1104K000	30.05.2014	31.08.2014	30.11.2014
B32520C1104J289	B32529C1104J289	30.05.2014	31.08.2014	30.11.2014
B32520C1104J189	B32529C1104J189	30.05.2014	31.08.2014	30.11.2014
B32520C1104J000	B32529C1104J000	30.05.2014	31.08.2014	30.11.2014
B32520C0683M289	B32529C0683M289	30.05.2014	31.08.2014	30.11.2014
B32520C0683M189	B32529C0683M189	30.05.2014	31.08.2014	30.11.2014
B32520C0683M000	B32529C0683M000	30.05.2014	31.08.2014	30.11.2014

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B32520C0683K289	B32529C0683K289	30.05.2014	31.08.2014	30.11.2014
B32520C0683K189	B32529C0683K189	30.05.2014	31.08.2014	30.11.2014
B32520C0683K000	B32529C0683K000	30.05.2014	31.08.2014	30.11.2014
B32520C0683J289	B32529C0683J289	30.05.2014	31.08.2014	30.11.2014
B32520C0683J189	B32529C0683J189	30.05.2014	31.08.2014	30.11.2014
B32520C0683J000	B32529C0683J000	30.05.2014	31.08.2014	30.11.2014
B32520C0334M289	B32529C0334M289	30.05.2014	31.08.2014	30.11.2014
B32520C0334M189	B32529C0334M189	30.05.2014	31.08.2014	30.11.2014
B32520C0334M000	B32529C0334M000	30.05.2014	31.08.2014	30.11.2014
B32520C0334K289	B32529C0334K289	30.05.2014	31.08.2014	30.11.2014
B32520C0334K189	B32529C0334K189	30.05.2014	31.08.2014	30.11.2014
B32520C0334K000	B32529C0334K000	30.05.2014	31.08.2014	30.11.2014
B32520C0334J289	B32529C0334J289	30.05.2014	31.08.2014	30.11.2014
B32520C0334J189	B32529C0334J189	30.05.2014	31.08.2014	30.11.2014
B32520C0334J000	B32529C0334J000	30.05.2014	31.08.2014	30.11.2014
B32520C0224M289	B32529C0224M289	30.05.2014	31.08.2014	30.11.2014
B32520C0224M189	B32529C0224M189	30.05.2014	31.08.2014	30.11.2014
B32520C0224M000	B32529C0224M000	30.05.2014	31.08.2014	30.11.2014
B32520C0224K289	B32529C0224K289	30.05.2014	31.08.2014	30.11.2014
B32520C0224K189	B32529C0224K189	30.05.2014	31.08.2014	30.11.2014
B32520C0224K000	B32529C0224K000	30.05.2014	31.08.2014	30.11.2014
B32520C0224J289	B32529C0224J289	30.05.2014	31.08.2014	30.11.2014
B32520C0224J189	B32529C0224J189	30.05.2014	31.08.2014	30.11.2014
B32520C0224J000	B32529C0224J000	30.05.2014	31.08.2014	30.11.2014
B32520C0154M289	B32529C0154M289	30.05.2014	31.08.2014	30.11.2014
B32520C0154M189	B32529C0154M189	30.05.2014	31.08.2014	30.11.2014
B32520C0154M000	B32529C0154M000	30.05.2014	31.08.2014	30.11.2014
B32520C0154K289	B32529C0154K289	30.05.2014	31.08.2014	30.11.2014
B32520C0154K189	B32529C0154K189	30.05.2014	31.08.2014	30.11.2014
B32520C0154K000	B32529C0154K000	30.05.2014	31.08.2014	30.11.2014
B32520C0154J289	B32529C0154J289	30.05.2014	31.08.2014	30.11.2014
B32520C0154J189	B32529C0154J189	30.05.2014	31.08.2014	30.11.2014
B32520C0154J000	B32529C0154J000	30.05.2014	31.08.2014	30.11.2014
B32520C0104M289	B32529C0104M289	30.05.2014	31.08.2014	30.11.2014
B32520C0104M189	B32529C0104M189	30.05.2014	31.08.2014	30.11.2014
B32520C0104M000	B32529C0104M000	30.05.2014	31.08.2014	30.11.2014
B32520C0104K289	B32529C0104K289	30.05.2014	31.08.2014	30.11.2014
B32520C0104K189	B32529C0104K189	30.05.2014	31.08.2014	30.11.2014
B32520C0104K000	B32529C0104K000	30.05.2014	31.08.2014	30.11.2014
B32520C0104J289	B32529C0104J289	30.05.2014	31.08.2014	30.11.2014
B32520C0104J189	B32529C0104J189	30.05.2014	31.08.2014	30.11.2014
B32520C0104J000	B32529C0104J000	30.05.2014	31.08.2014	30.11.2014

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at [www.epcos.com/sales](http://www.epcos.com/sales).

General purpose (stacked/wound)

**Typical applications**

- Blocking
- Coupling, decoupling
- Bypassing
- RFI for automotive

**Climatic**

- Max. operating temperature: 125 °C
- Climatic category (IEC 60068-1): 55/125/56

**Construction**

- Dielectric: polyethylene terephthalate (polyester, PET)
- Stacked-film technology for lead spacing 5 to 15 mm  
= code C, D or E in digit 7 of ordering code
- Wound capacitor technology for lead spacing 10 to 37.5 mm  
= code N, Q or R in digit 7 of ordering code
- Plastic case (UL 94 V-0)
- Epoxy resin sealing (UL 94 V-0)

**Features**

- High pulse strength
- High contact reliability
- RoHS-compatible
- Halogen-free capacitors available on request

**Terminals**

- Parallel wire leads, lead-free tinned
- Special lead lengths available on request


**Marking**

Manufacturer's logo,  
rated capacitance (coded), cap. tolerance (code letter),  
rated DC voltage, date of manufacture (coded),  
coded type ("1") for lead spacing 5 mm,  
series and lot number for lead spacing ≥10 mm

**Delivery mode**

Bulk (untaped)  
Taped (Ammo pack or reel)  
For notes on taping, refer to chapter "Taping and packing".


**Dimensional drawing**



Dimensions in mm

Lead spacing $e \pm 0.4$	Lead diameter $d_1 \pm 0.05$	Type
5.0	0.5	B32529
7.5	0.5	B32520
10.0	0.6 <sup>1)</sup>	B32521
15.0	0.8	B32522
22.5	0.8	B32523
27.5	0.8	B32524
37.5	1.0	B32526


1) 0.5 mm for capacitor width  $w = 4$  mm



Overview of available types

Lead spacing	5.0 mm						7.5 mm				10.0 mm				
Type	B32529						B32520				B32521				
Page	6						10				12				
Technology	s	s	s	s	s	s	s	s	s	s	s	s	s	s	s
V <sub>R</sub> (V DC)	50	63	100	250	400	630	63	100	250	400	63	100	250	400	630
V <sub>RMS</sub> (V AC)	32	40	63	160	200	400	40	63	160	200	40	63	160	200	200
C <sub>R</sub> (μF)															
0.0010															
0.0015															
0.0022															
0.0033															
0.0047															
0.0068															
0.010															
0.015															
0.022															
0.033															
0.047															
0.056															
0.068															
0.082															
0.10															
0.12															
0.15															
0.18															
0.22															
0.33															
0.47															
0.68															
1.0															
1.5															
2.2															
3.3															
4.7															


Technology: s = Stacked-film technology / w = Wound capacitor technology


**B32520 ... B32529**
**General purpose (stacked/wound)**
**Overview of available types**

Lead spacing	15.0 mm					22.5 mm					27.5 mm					
Type	B32522					B32523					B32524					
Page	14					17					18					
Technology	s	s/w	s/w	s	w	s	w	w	w	w	w	w	w	w	w	
$V_R$ (V DC)	63	100	250	400	450	630	63	100	250	400	630	63	100	250	400	630
$V_{RMS}$ (V AC)	40	63	160	200	200	200	40	63	160	200	200	40	63	160	200	220
$C_R$ ( $\mu$ F)																
0.047																
0.068																
0.10																
0.15																
0.22																
0.33																
0.39																
0.47																
0.56																
0.68																
1.0																
1.5																
2.2																
3.3																
4.7																
6.8																
10																
15																
22																
33																
47																
68																
100																


Technology: s = Stacked-film technology / w = Wound capacitor technology




**Overview of available types**

Lead spacing	37.5 mm			
Type	B32526			
Page	20			
Technology	w	w	w	w
$V_R$ (V DC)	63	100	250	400
$V_{RMS}$ (V AC)	40	63	160	200
$C_R$ ( $\mu$ F)				
3.3				
4.7				
5.6				
6.8				
8.2				
10				
15				
22				
33				
47				
56				
68				
82				
100				
150				
220				

Technology: s = Stacked-film technology / w = Wound capacitor technology


**B32529**
**General purpose (stacked)**
**Ordering codes and packing units (lead spacing 5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60 \text{ Hz}$	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu\text{F}$					
50	32	3.3	7.8 × 13.0 × 7.8	B32529D5335+***	4000	3200	4000
		4.7	7.8 × 13.0 × 7.8	B32529D5475M***	4000	3200	4000
63	40	0.0010	2.5 × 6.5 × 7.3	B32529C0102+***	12800	11200	8000
		0.0015	2.5 × 6.5 × 7.3	B32529C0152+***	12800	11200	8000
		0.0022	2.5 × 6.5 × 7.3	B32529C0222+***	12800	11200	8000
		0.0033	2.5 × 6.5 × 7.3	B32529C0332+***	12800	11200	8000
		0.0047	2.5 × 6.5 × 7.3	B32529C0472+***	12800	11200	8000
		0.0068	2.5 × 6.5 × 7.3	B32529C0682+***	12800	11200	8000
		0.010	2.5 × 6.5 × 7.3	B32529C0103+***	12800	11200	8000
		0.015	2.5 × 6.5 × 7.3	B32529C0153+***	12800	11200	8000
		0.022	2.5 × 6.5 × 7.3	B32529C0223+***	12800	11200	8000
		0.033	2.5 × 6.5 × 7.3	B32529C0333+***	12800	11200	8000
		0.047	2.5 × 6.5 × 7.3	B32529C0473+***	12800	11200	8000
		0.068	2.5 × 6.5 × 7.3	B32529C0683+***	12800	11200	8000
		0.10	2.5 × 6.5 × 7.3	B32529C0104+***	12800	11200	8000
		0.15	2.5 × 6.5 × 7.3	B32529C0154+***	12800	11200	8000
		0.22	2.5 × 6.5 × 7.3	B32529C0224+***	12800	11200	8000
		0.33	3.0 × 6.5 × 7.3	B32529C0334+***	10800	9600	8000
		0.47	3.5 × 8.0 × 7.3	B32529C0474+***	9200	8000	8000
		0.68	4.5 × 9.5 × 7.3	B32529C0684+***	7200	6000	6000
		1.0	4.5 × 9.5 × 7.3	B32529C0105+***	7200	6000	6000
		1.5	6.0 × 10.5 × 7.5	B32529C0155+***	5200	4400	4000
2.2	7.8 × 13.0 × 7.8	B32529D0225+***	4000	3200	4000		
3.3	7.8 × 13.0 × 7.8	B32529D0335+***	4000	3200	4000		
4.7	7.8 × 13.0 × 7.8	B32529D0475M***	4000	3200	4000		

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (standard lead length 6 – 1 mm)


**Ordering codes and packing units (lead spacing 5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
100	63	0.0010	2.5 × 6.5 × 7.3	B32529C1102+***	12800	11200	8000
		0.0015	2.5 × 6.5 × 7.3	B32529C1152+***	12800	11200	8000
		0.0022	2.5 × 6.5 × 7.3	B32529C1222+***	12800	11200	8000
		0.0033	2.5 × 6.5 × 7.3	B32529C1332+***	12800	11200	8000
		0.0047	2.5 × 6.5 × 7.3	B32529C1472+***	12800	11200	8000
		0.0068	2.5 × 6.5 × 7.3	B32529C1682+***	12800	11200	8000
		0.010	2.5 × 6.5 × 7.3	B32529C1103+***	12800	11200	8000
		0.015	2.5 × 6.5 × 7.3	B32529C1153+***	12800	11200	8000
		0.022	2.5 × 6.5 × 7.3	B32529C1223+***	12800	11200	8000
		0.033	2.5 × 6.5 × 7.3	B32529C1333+***	12800	11200	8000
		0.047	2.5 × 6.5 × 7.3	B32529C1473+***	12800	11200	8000
		0.068	2.5 × 6.5 × 7.3	B32529C1683+***	12800	11200	8000
		0.10	2.5 × 6.5 × 7.3	B32529C1104+***	12800	11200	8000
		0.15	3.0 × 6.5 × 7.3	B32529C1154+***	10800	9600	8000
		0.22	3.5 × 8.0 × 7.3	B32529C1224+***	9200	8000	8000
		0.33	3.5 × 8.0 × 7.3	B32529C1334+***	9200	8000	8000
		0.47	4.5 × 9.5 × 7.3	B32529C1474+***	7200	6000	6000
0.68	6.0 × 10.5 × 7.5	B32529C1684+***	5200	4400	4000		
1.0	7.8 × 13.0 × 7.8	B32529D1105+***	4000	3200	4000		

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (standard lead length 6 – 1 mm)


**B32529**
**General purpose (stacked)**
**Ordering codes and packing units (lead spacing 5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
250	160	0.0010	2.5 × 6.5 × 7.3	B32529C3102+***	12800	11200	8000
		0.0015	2.5 × 6.5 × 7.3	B32529C3152+***	12800	11200	8000
		0.0022	2.5 × 6.5 × 7.3	B32529C3222+***	12800	11200	8000
		0.0033	2.5 × 6.5 × 7.3	B32529C3332+***	12800	11200	8000
		0.0047	2.5 × 6.5 × 7.3	B32529C3472+***	12800	11200	8000
		0.0068	2.5 × 6.5 × 7.3	B32529C3682+***	12800	11200	8000
		0.010	2.5 × 6.5 × 7.3	B32529C3103+***	12800	11200	8000
		0.015	2.5 × 6.5 × 7.3	B32529C3153+***	12800	11200	8000
		0.022	2.5 × 6.5 × 7.3	B32529C3223+***	12800	11200	8000
		0.033	3.0 × 6.5 × 7.3	B32529C3333+***	10800	9600	8000
		0.047	3.5 × 8.0 × 7.3	B32529C3473+***	9200	8000	8000
		0.068	4.5 × 9.5 × 7.3	B32529C3683+***	7200	6000	6000
		0.10	4.5 × 9.5 × 7.3	B32529C3104+***	7200	6000	6000
		0.15	5.0 × 10.0 × 7.5	B32529C3154+***	6400	5600	6000
		0.22	7.8 × 13.0 × 7.8	B32529D3224+***	4000	3200	4000
		0.33	7.8 × 13.0 × 7.8	B32529C3334+***	4000	3200	4000
		0.47	7.8 × 13.0 × 7.8	B32529C3474+***	4000	3200	4000

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (standard lead length 6 – 1 mm)


**Ordering codes and packing units (lead spacing 5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
400	200	0.0010	2.5 × 6.5 × 7.3	B32529C6102+***	12800	11200	8000
		0.0015	2.5 × 6.5 × 7.3	B32529C6152+***	12800	11200	8000
		0.0022	2.5 × 6.5 × 7.3	B32529C6222+***	12800	11200	8000
		0.0033	2.5 × 6.5 × 7.3	B32529C6332+***	12800	11200	8000
		0.0047	2.5 × 6.5 × 7.3	B32529C6472+***	12800	11200	8000
		0.0068	2.5 × 6.5 × 7.3	B32529C6682+***	12800	11200	8000
		0.010	3.0 × 6.5 × 7.3	B32529E6103+***	10800	9600	8000
		0.015	3.0 × 6.5 × 7.3	B32529E6153+***	10800	9600	8000
		0.022	3.5 × 8.0 × 7.3	B32529E6223+***	9200	8000	8000
		0.033	4.5 × 9.5 × 7.3	B32529E6333+***	7200	6000	6000
		0.047	4.5 × 9.5 × 7.3	B32529E6473+***	7200	6000	6000
		0.068	6.0 × 10.5 × 7.5	B32529E6683+***	5200	4400	4000
		0.10	7.8 × 13.0 × 7.8	B32529E6104+***	4000	3200	4000
		0.15	7.8 × 13.0 × 7.8	B32529E6154+***	4000	3200	4000
630	400	0.0010	2.5 × 6.5 × 7.3	B32529C8102+***	12800	11200	8000
		0.0015	2.5 × 6.5 × 7.3	B32529C8152+***	12800	11200	8000
		0.0022	2.5 × 6.5 × 7.3	B32529C8222+***	12800	11200	8000
		0.0033	3.5 × 8.0 × 7.3	B32529C8332+***	9200	8000	8000
		0.0047	3.5 × 8.0 × 7.3	B32529C8472+***	9200	8000	8000
		0.0068	3.5 × 8.0 × 7.3	B32529C8682+***	9200	8000	8000
		0.010	5.0 × 10.0 × 7.5	B32529C8103+***	6400	5600	6000
		0.015	5.0 × 10.0 × 7.5	B32529C8153+***	6400	5600	6000
		0.022	7.8 × 13.0 × 7.8	B32529C8223+***	5200	4400	4000
		0.033	7.8 × 13.0 × 7.8	B32529C8333+***	4000	3200	4000

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (standard lead length 6 – 1 mm)


**B32520**
**General purpose (stacked)**
**Ordering codes and packing units (lead spacing 7.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$	Ordering code (composition see below)	Ammo pack	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$	mm		pcs./MOQ		
63	40	0.068	2.5 × 7.0 × 10.0	B32520C0683+***	12800	11200	10000
		0.10	2.5 × 7.0 × 10.0	B32520C0104+***	12800	11200	10000
		0.15	2.5 × 7.0 × 10.0	B32520C0154+***	12800	11200	10000
		0.22	2.5 × 7.0 × 10.0	B32520C0224+***	12800	11200	10000
		0.33	2.5 × 7.0 × 10.0	B32520C0334+***	12800	11200	10000
		0.47	3.0 × 8.0 × 10.0	B32520C0474+***	10400	9600	8000
		0.68	4.0 × 8.5 × 10.0	B32520C0684+***	8000	7200	6000
		1.0	5.0 × 10.5 × 10.0	B32520C0105+***	6400	5600	4000
		1.5	5.0 × 10.5 × 10.0	B32520C0155+***	6400	5600	4000
		2.2	6.0 × 12.0 × 10.3	B32520C0225+***	5200	4400	3000
100	63	0.047	2.5 × 7.0 × 10.0	B32520C1473+***	12800	11200	10000
		0.068	2.5 × 7.0 × 10.0	B32520C1683+***	12800	11200	10000
		0.10	2.5 × 7.0 × 10.0	B32520C1104+***	12800	11200	10000
		0.15	3.0 × 8.0 × 10.0	B32520C1154+***	10400	9600	8000
		0.22	3.0 × 8.0 × 10.0	B32520C1224+***	10400	9600	8000
		0.33	4.0 × 8.5 × 10.0	B32520C1334+***	8000	7200	6000
		0.47	5.0 × 10.5 × 10.0	B32520C1474+***	6400	5600	4000
		0.68	6.0 × 12.0 × 10.3	B32520C1684+***	5200	4400	3000
		1.0	6.0 × 12.0 × 10.3	B32520C1105+***	5200	4400	3000
250	160	0.015	2.5 × 7.0 × 10.0	B32520C3153+***	12800	11200	10000
		0.022	2.5 × 7.0 × 10.0	B32520C3223+***	12800	11200	10000
		0.033	2.5 × 7.0 × 10.0	B32520C3333+***	12800	11200	10000
		0.047	2.5 × 7.0 × 10.0	B32520C3473+***	12800	11200	10000
		0.068	3.0 × 8.0 × 10.0	B32520C3683+***	10400	9600	8000
		0.10	4.0 × 8.5 × 10.0	B32520C3104+***	8000	7200	6000
		0.15	5.0 × 10.5 × 10.0	B32520C3154+***	6400	5600	4000
		0.22	6.0 × 12.0 × 10.3	B32520C3224+***	5200	4400	3000

MOQ = Minimum Order Quantity, consisting of 4 packing units.  
Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (standard lead length 6 – 1 mm)


**Ordering codes and packing units (lead spacing 7.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
400	200	0.0010	$2.5 \times 7.0 \times 10.0$	B32520C6102+***	12800	11200	10000
		0.0015	$2.5 \times 7.0 \times 10.0$	B32520C6152+***	12800	11200	10000
		0.0022	$2.5 \times 7.0 \times 10.0$	B32520C6222+***	12800	11200	10000
		0.0033	$2.5 \times 7.0 \times 10.0$	B32520C6332+***	12800	11200	10000
		0.0047	$2.5 \times 7.0 \times 10.0$	B32520C6472+***	12800	11200	10000
		0.0068	$2.5 \times 7.0 \times 10.0$	B32520C6682+***	12800	11200	10000
		0.010	$2.5 \times 7.0 \times 10.0$	B32520C6103+***	12800	11200	10000
		0.015	$3.0 \times 8.0 \times 10.0$	B32520E6153+***	10400	9600	8000
		0.022	$3.0 \times 8.0 \times 10.0$	B32520E6223+***	10400	9600	8000
		0.033	$4.0 \times 8.5 \times 10.0$	B32520E6333+***	8000	7200	6000
		0.047	$4.0 \times 8.5 \times 10.0$	B32520E6473+***	8000	7200	6000
		0.068	$5.0 \times 10.5 \times 10.0$	B32520E6683+***	6400	5600	4000
		0.10	$5.0 \times 10.5 \times 10.0$	B32520E6104+***	6400	5600	4000
		0.15	$6.0 \times 12.0 \times 10.3$	B32520E6154+***	5200	4400	3000

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M =  $\pm 20\%$

K =  $\pm 10\%$


J =  $\pm 5\%$

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (standard lead length 6 – 1 mm)


**B32521**
**General purpose (stacked/wound)**
**Ordering codes and packing units (lead spacing 10 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
63	40	0.47	4.0 × 7.0 × 13.0	B32521C0474+***	4000	6800	4000
		0.68	4.0 × 7.0 × 13.0	B32521C0684+***	4000	6800	4000
		1.0	4.0 × 9.0 × 13.0	B32521C0105+***	4000	6800	4000
		1.5	5.0 × 11.0 × 13.0	B32521C0155+***	3320	5200	4000
		2.2	5.0 × 11.0 × 13.0	B32521C0225+***	3320	5200	4000
		3.3	6.0 × 12.0 × 13.0	B32521C0335+***	2720	4400	4000
100	63	0.047	4.0 × 7.0 × 13.0	B32521C1473+***	4000	6800	4000
		0.068	4.0 × 7.0 × 13.0	B32521C1683+***	4000	6800	4000
		0.10	4.0 × 7.0 × 13.0	B32521C1104+***	4000	6800	4000
		0.15	4.0 × 7.0 × 13.0	B32521C1154+***	4000	6800	4000
		0.22	4.0 × 7.0 × 13.0	B32521C1224+***	4000	6800	4000
		0.33	4.0 × 7.0 × 13.0	B32521C1334+***	4000	6800	4000
		0.47	4.0 × 9.0 × 13.0	B32521C1474+***	4000	6800	4000
		0.68	5.0 × 11.0 × 13.0	B32521C1684+***	3320	5200	4000
		1.0	6.0 × 12.0 × 13.0	B32521C1105+***	2720	4400	4000
250	160	0.010	4.0 × 7.0 × 13.0	B32521C3103+***	4000	6800	4000
		0.015	4.0 × 7.0 × 13.0	B32521C3153+***	4000	6800	4000
		0.022	4.0 × 7.0 × 13.0	B32521C3223+***	4000	6800	4000
		0.033	4.0 × 7.0 × 13.0	B32521C3333+***	4000	6800	4000
		0.047	4.0 × 7.0 × 13.0	B32521C3473+***	4000	6800	4000
		0.056	4.0 × 7.0 × 13.0	B32521C3563+***	4000	6800	4000
		0.068	4.0 × 7.0 × 13.0	B32521C3683+***	4000	6800	4000
		0.082	4.0 × 7.0 × 13.0	B32521C3823+***	4000	6800	4000
		0.10	4.0 × 7.0 × 13.0	B32521C3104+***	4000	6800	4000
		0.12	4.0 × 9.0 × 13.0	B32521C3124+***	4000	6800	4000
		0.15	4.0 × 9.0 × 13.0	B32521C3154+***	4000	6800	4000
		0.18	5.0 × 11.0 × 13.0	B32521C3184+***	3320	5200	4000
		0.22	5.0 × 11.0 × 13.0	B32521C3224+***	3320	5200	4000
		0.33	5.0 × 11.0 × 13.0	B32521C3334+***	3320	5200	4000
		0.47	6.0 × 12.0 × 13.0	B32521C3474+***	2720	4400	4000

MOQ = Minimum Order Quantity, consisting of 4 packing units.  
Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%

J = ±5%


\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (standard lead length 6 – 1 mm)




**Ordering codes and packing units (lead spacing 10 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
400	200	0.010	$4.0 \times 7.0 \times 13.0$	B32521E6103+***	4000	6800	4000
		0.015	$4.0 \times 7.0 \times 13.0$	B32521E6153+***	4000	6800	4000
		0.022	$4.0 \times 7.0 \times 13.0$	B32521E6223+***	4000	6800	4000
		0.033	$4.0 \times 7.0 \times 13.0$	B32521E6333+***	4000	6800	4000
		0.047	$4.0 \times 9.0 \times 13.0$	B32521E6473+***	4000	6800	4000
		0.068	$4.0 \times 9.0 \times 13.0$	B32521E6683+***	4000	6800	4000
		0.10	$5.0 \times 11.0 \times 13.0$	B32521E6104+***	3320	5200	4000
		0.15	$6.0 \times 12.0 \times 13.0$	B32521E6154+***	2720	4400	4000
630	200	0.010	$4.0 \times 9.0 \times 13.0$	B32521D8103+***	–	6800	4000
		0.015	$5.0 \times 11.0 \times 13.0$	B32521D8153+***	–	6800	4000
		0.022	$5.0 \times 11.0 \times 13.0$	B32521D8223+***	–	5200	4000
		0.033	$6.0 \times 12.0 \times 13.0$	B32521D8333+***	–	5200	4000

MOQ = Minimum Order Quantity, consisting of 4 packing units.  
 Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M =  $\pm 20\%$

K =  $\pm 10\%$


J =  $\pm 5\%$

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (standard lead length 6 – 1 mm)


**B32522**
**General purpose (stacked/wound)**
**Ordering codes and packing units (lead spacing 15 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
63	40	0.68	$5.0 \times 10.5 \times 18.0$	B32522C0684+***	4680	5200	4000
		1.0	$5.0 \times 10.5 \times 18.0$	B32522C0105+***	4680	5200	4000
		1.5	$5.0 \times 10.5 \times 18.0$	B32522C0155+***	4680	5200	4000
		2.2	$5.0 \times 10.5 \times 18.0$	B32522C0225+***	4680	5200	4000
		3.3	$6.0 \times 11.0 \times 18.0$	B32522C0335+***	3840	4400	4000
		4.7	$7.0 \times 12.5 \times 18.0$	B32522C0475+***	3320	3600	4000
		6.8	$8.5 \times 14.5 \times 18.0$	B32522C0685+***	2720	2800	2000
		10	$9.0 \times 17.5 \times 18.0$	B32522C0106+***	2560	2800	2000
100	63	0.33	$5.0 \times 10.5 \times 18.0$	B32522C1334+***	4680	5200	4000
		0.47	$5.0 \times 10.5 \times 18.0$	B32522C1474+***	4680	5200	4000
		0.68	$5.0 \times 10.5 \times 18.0$	B32522C1684+***	4680	5200	4000
		1.0	$5.0 \times 10.5 \times 18.0$	B32522C1105+***	4680	5200	4000
		1.0 ▽	$6.0 \times 11.0 \times 18.0$	B32522Q1105+***	3840	4400	4000
		1.5	$6.0 \times 11.0 \times 18.0$	B32522C1155+***	3840	4400	4000
		1.5 ▽	$7.0 \times 12.5 \times 18.0$	B32522Q1155+***	3320	3600	4000
		2.2	$7.0 \times 12.5 \times 18.0$	B32522C1225+***	3320	3600	4000
		2.2 ▽	$8.5 \times 14.5 \times 18.0$	B32522Q1225+***	2720	2800	2000
		3.3	$8.5 \times 14.5 \times 18.0$	B32522C1335+***	2720	2800	2000
		3.3 ▽	$9.0 \times 17.5 \times 18.0$	B32522Q1335+***	2560	2800	2000
		4.7	$9.0 \times 17.5 \times 18.0$	B32522C1475+***	2560	2800	2000
		4.7 ▽	$11.0 \times 18.5 \times 18.0$	B32522Q1475+***	–	2200	1200
		6.8	$11.0 \times 18.5 \times 18.0$	B32522C1685+***	–	–	1200

▽ Wound capacitor technology

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

 M =  $\pm 20\%$ 

 K =  $\pm 10\%$ 


 J =  $\pm 5\%$ 

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (standard lead length 6 –1 mm)


**Ordering codes and packing units (lead spacing 15 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
250	160	0.10	$5.0 \times 10.5 \times 18.0$	B32522C3104+***	4680	5200	4000
		0.15	$5.0 \times 10.5 \times 18.0$	B32522C3154+***	4680	5200	4000
		0.22	$5.0 \times 10.5 \times 18.0$	B32522C3224+***	4680	5200	4000
		0.33	$5.0 \times 10.5 \times 18.0$	B32522C3334+***	4680	5200	4000
		0.39	$5.0 \times 10.5 \times 18.0$	B32522C3394+***	4680	5200	4000
		0.47	$6.0 \times 11.0 \times 18.0$	B32522C3474+***	3840	4400	4000
		0.56	$7.0 \times 12.5 \times 18.0$	B32522C3564+***	3320	3600	4000
		0.68	$7.0 \times 12.5 \times 18.0$	B32522C3684+***	3320	3600	4000
		1.0	$8.5 \times 14.5 \times 18.0$	B32522C3105+***	2720	2800	2000
		1.0	∇ $8.5 \times 14.5 \times 18.0$	B32522N3105+***	2720	2800	2000
		1.5	$9.0 \times 17.5 \times 18.0$	B32522C3155+***	2560	2800	2000
		1.5	∇ $9.0 \times 17.5 \times 18.0$	B32522N3155+***	2560	2800	2000
		2.2	$11.0 \times 18.5 \times 18.0$	B32522C3225+***	–	–	1200
400	200	0.047	$5.0 \times 10.5 \times 18.0$	B32522E6473+***	4680	5200	4000
		0.068	$5.0 \times 10.5 \times 18.0$	B32522E6683+***	4680	5200	4000
		0.10	$5.0 \times 10.5 \times 18.0$	B32522E6104+***	4680	5200	4000
		0.15	$5.0 \times 10.5 \times 18.0$	B32522E6154+***	4680	5200	4000
		0.22	$6.0 \times 11.0 \times 18.0$	B32522E6224+***	3840	4400	4000
		0.33	$7.0 \times 12.5 \times 18.0$	B32522E6334+***	3320	3600	4000
		0.39	$9.0 \times 17.5 \times 18.0$	B32522E6394+***	2560	2800	2000
		0.47	$9.0 \times 17.5 \times 18.0$	B32522E6474+***	2560	2800	2000
		0.56	$9.0 \times 17.5 \times 18.0$	B32522E6564+***	2560	2800	2000
		0.68	$9.0 \times 17.5 \times 18.0$	B32522E6684+***	2560	2800	2000
		1.0	$5.0 \times 10.5 \times 18.0$	B32522E6105+***	–	–	1200

∇ Wound capacitor technology

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M =  $\pm 20\%$

K =  $\pm 10\%$


J =  $\pm 5\%$

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (standard lead length 6 – 1 mm)


**B32522**
**General purpose (stacked/wound)**
**Ordering codes and packing units (lead spacing 15 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./ MOQ	Untaped pcs./ MOQ
V DC	V AC	$\mu F$					
450	200	0.10 ▽	5.0 × 10.5 × 18.0	B32522N6104+***	4680	5200	4000
		0.15 ▽	5.0 × 10.5 × 18.0	B32522N6154+***	4680	5200	4000
		0.22 ▽	6.0 × 11.0 × 18.0	B32522N6224+***	3840	4400	4000
		0.33 ▽	7.0 × 12.5 × 18.0	B32522N6334+***	3320	3600	4000
		0.47 ▽	8.5 × 14.5 × 18.0	B32522N6474+***	2720	2800	2000
		0.68 ▽	9.0 × 17.5 × 18.0	B32522N6684+***	2560	2800	2000
		1.0 ▽	11.0 × 18.5 × 18.0	B32522N6105+***	—	2200	1200
630	200	0.047	5.0 × 10.5 × 18.0	B32522D8473+***	—	5200	4000
		0.068	6.0 × 11.0 × 18.0	B32522D8683+***	—	4400	4000
		0.10	7.0 × 12.5 × 18.0	B32522D8104+***	—	3600	4000
		0.15	8.5 × 14.5 × 18.0	B32522D8154+***	—	2800	2000
		0.22	9.0 × 17.5 × 18.0	B32522D8224+***	—	2800	2000

▽ Wound capacitor technology

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (standard lead length 6 – 1 mm)


**Ordering codes and packing units (lead spacing 22.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./MOQ	Untaped pcs./MOQ
V DC	V AC	$\mu F$					
63	40	3.3	$6.0 \times 15.0 \times 26.5$	B32523R0335+***	2720	2800	2880
		4.7	$6.0 \times 15.0 \times 26.5$	B32523R0475+***	2720	2800	2880
		6.8	$6.0 \times 15.0 \times 26.5$	B32523R0685+***	2720	2800	2880
		10	$7.0 \times 16.0 \times 26.5$	B32523R0106+***	2320	2400	2520
		15	$10.5 \times 16.5 \times 26.5$	B32523R0156+***	1560	1600	2160
		22	$12.0 \times 22.0 \times 26.5$	B32523R0226+***	–	–	1800
100	63	1.5	$6.0 \times 15.0 \times 26.5$	B32523Q1155+***	2720	2800	2880
		2.2	$6.0 \times 15.0 \times 26.5$	B32523Q1225+***	2720	2800	2880
		3.3	$6.0 \times 15.0 \times 26.5$	B32523Q1335+***	2720	2800	2880
		4.7	$7.0 \times 16.0 \times 26.5$	B32523Q1475+***	2320	2400	2540
		6.8	$8.5 \times 16.5 \times 26.5$	B32523Q1685+***	1960	2000	2040
		10	$10.5 \times 18.5 \times 26.5$	B32523Q1106+***	1560	1600	2160
		15	$12.0 \times 22.0 \times 26.5$	B32523Q1156+***	–	–	1800
250	160	0.47	$6.0 \times 15.0 \times 26.5$	B32523Q3474+***	2720	2800	2880
		0.68	$6.0 \times 15.0 \times 26.5$	B32523Q3684+***	2720	2800	2880
		1.0	$6.0 \times 15.0 \times 26.5$	B32523Q3105+***	2720	2800	2880
		1.5	$7.0 \times 16.0 \times 26.5$	B32523Q3155+***	2320	2400	2520
		2.2	$10.5 \times 16.5 \times 26.5$	B32523Q3225+***	1560	1600	2160
		3.3	$11.0 \times 20.5 \times 26.5$	B32523Q3335+***	1480	1400	2040
400	200	0.22	$6.0 \times 15.0 \times 26.5$	B32523Q6224+***	2720	2800	2880
		0.33	$6.0 \times 15.0 \times 26.5$	B32523Q6334+***	2720	2800	2880
		0.47	$7.0 \times 16.0 \times 26.5$	B32523Q6474+***	2320	2400	2520
		0.68	$8.5 \times 16.5 \times 26.5$	B32523Q6684+***	1920	2000	2040
		1.0	$10.5 \times 16.5 \times 26.5$	B32523Q6105+***	1560	1600	2160
		1.5	$11.0 \times 20.5 \times 26.5$	B32523Q6155+***	1480	1400	2040
630	200	0.10	$6.0 \times 15.0 \times 26.5$	B32523Q8104+***	2720	2800	2880
		0.15	$6.0 \times 15.0 \times 26.5$	B32523Q8154+***	2720	2800	2880
		0.22	$7.0 \times 16.0 \times 26.5$	B32523Q8224+***	2320	2400	2520
		0.33	$10.5 \times 16.5 \times 26.5$	B32523Q8334+***	1560	1600	2160
		0.47	$10.5 \times 20.5 \times 26.5$	B32523Q8474+***	1560	1600	2160
		0.68	$12.0 \times 22.0 \times 26.5$	B32523Q8684+***	–	–	1800

MOQ = Minimum Order Quantity, consisting of 4 packing units.  
Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M =  $\pm 20\%$

K =  $\pm 10\%$


J =  $\pm 5\%$

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (standard lead length 6 – 1 mm)


**B32524**
**General purpose (wound)**
**Ordering codes and packing units (lead spacing 27.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./MOQ	Untaped pcs./MOQ
V DC	V AC	$\mu F$					
63	40	4.7	11.0 × 21.0 × 31.5	B32524R0475+***	–	1400	1280
		6.8	11.0 × 21.0 × 31.5	B32524Q0685+***	–	1400	1280
		10	11.0 × 21.0 × 31.5	B32524R0106+***	–	1400	1280
		15	11.0 × 21.0 × 31.5	B32524R0156+***	–	1400	1280
		22	11.0 × 21.0 × 31.5	B32524R0226+***	–	1400	1280
		33	12.5 × 21.5 × 31.5	B32524R0336+***	–	1200	1120
		47	18.0 × 27.5 × 31.5	B32524R0476+***	–	–	800
		68	18.0 × 27.5 × 31.5	B32524R0686+***	–	–	800
		100	22.0 × 36.5 × 31.5	B32524R0107+***	–	–	640
100	63	4.7	11.0 × 21.0 × 31.5	B32524Q1475+***	–	1400	1280
		6.8	11.0 × 21.0 × 31.5	B32524Q1685+***	–	1400	1280
		10	11.0 × 21.0 × 31.5	B32524Q1106+***	–	1400	1280
		15	11.0 × 21.0 × 31.5	B32524Q1156+***	–	1400	1280
		22	14.0 × 24.5 × 31.5	B32524Q1226+***	–	1000	1040
		33	18.0 × 27.5 × 31.5	B32524Q1336+***	–	–	800
		47	21.0 × 31.0 × 31.5	B32524Q1476+***	–	–	720
		68	22.0 × 36.5 × 31.5	B32524Q1686+***	–	–	640
		250	160	1.5	11.0 × 21.0 × 31.5	B32524Q3155+***	–
2.2	11.0 × 21.0 × 31.5			B32524Q3225+***	–	1400	1280
3.3	11.0 × 21.0 × 31.5			B32524Q3335+***	–	1400	1280
4.7	11.0 × 21.0 × 31.5			B32524Q3475+***	–	1400	1280
6.8	11.0 × 21.0 × 31.5			B32524R3685+***	–	1400	1280
10	12.5 × 21.5 × 31.5			B32524R3106+***	–	1200	1120
15	15.0 × 24.5 × 31.5			B32524R3156M***	–	–	960
15	18.0 × 27.5 × 31.5			B32524R3156J***	–	–	960
15	18.0 × 27.5 × 31.5			B32524R3156K***	–	–	960
22	19.0 × 30.0 × 31.5			B32524R3226+***	–	–	720

MOQ = Minimum Order Quantity, consisting of 4 packing units.  
 Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (standard lead length 6 – 1 mm)


**Ordering codes and packing units (lead spacing 27.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60 \text{ Hz}$	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./MOQ	Untaped pcs./MOQ
V DC	V AC	$\mu\text{F}$					
250	160	33	22.0 × 36.5 × 31.5	B32524R3336+***	–	–	640
400	200	0.68	11.0 × 19.0 × 31.5	B32524Q6684+***	–	1400	1280
		1.0	11.0 × 19.0 × 31.5	B32524Q6105+***	–	1400	1280
		1.5	11.0 × 19.0 × 31.5	B32524Q6155+***	–	1400	1280
		2.2	11.0 × 21.0 × 31.5	B32524R6225+***	–	1400	1280
		3.3	14.0 × 24.5 × 31.5	B32524R6335+***	–	1000	1040
		4.7	14.0 × 24.5 × 31.5	B32524R6475+***	–	1000	1040
		6.8	18.0 × 27.5 × 31.5	B32524R6685+***	–	–	800
		10	22.0 × 36.5 × 31.5	B32524R6106+***	–	–	640
630	220	0.33	11.0 × 21.0 × 31.5	B32524Q8334+***	–	1400	1280
		0.47	11.0 × 21.0 × 31.5	B32524Q8474+***	–	1400	1280
		0.68	11.0 × 21.0 × 31.5	B32524Q8684+***	–	1400	1280
		1.0	14.0 × 24.5 × 31.5	B32524Q8105+***	–	1000	1040
		1.5	18.0 × 27.5 × 31.5	B32524Q8155+***	–	–	800
		2.2	21.0 × 31.0 × 31.5	B32524Q8225+***	–	–	720

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%

K = ±10%


J = ±5%

\*\*\* = Packaging code:

289 = Ammo pack

189 = Reel

000 = Untaped (standard lead length 6 – 1 mm)


**B32526**
**General purpose (wound)**
**Ordering codes and packing units (lead spacing 37.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./MOQ	Untaped pcs./MOQ
V DC	V AC	$\mu F$					
63	40	22	12.0 × 22.0 × 41.5	B32526R0226+***	—	—	1620
		33	12.0 × 22.0 × 41.5	B32526R0336+***	—	—	1620
		47	12.0 × 22.0 × 41.5	B32526R0476+***	—	—	1620
		56	24.0 × 15.0 × 41.5	B32526T0566+***	—	—	1040
		68	16.0 × 28.5 × 41.5	B32526R0686+***	—	—	800
		82	24.0 × 19.0 × 41.5	B32526T0826+***	—	—	780
		100	18.0 × 32.5 × 41.5	B32526R0107+***	—	—	720
		150	20.0 × 39.5 × 41.5	B32526R0157+***	—	—	640
		220	28.0 × 42.5 × 41.5	B32526R0227A***	—	—	440
100	63	15	12.0 × 22.0 × 41.5	B32526R1156+***	—	—	1620
		22	12.0 × 22.0 × 41.5	B32526R1226+***	—	—	1620
		33	14.0 × 25.0 × 41.5	B32526R1336+***	—	—	1380
		33	24.0 × 15.0 × 41.5	B32526T1336+***	—	—	1040
		47	16.0 × 28.5 × 41.5	B32526R1476+***	—	—	800
		47	24.0 × 19.0 × 41.5	B32526T1476+***	—	—	780
		68	18.0 × 32.5 × 41.5	B32526R1686+***	—	—	720
		100	20.0 × 39.5 × 41.5	B32526R1107+***	—	—	640
		150	28.0 × 42.5 × 41.5	B32526R1157+***	—	—	440
250	160	4.7	12.0 × 22.0 × 41.5	B32526R3475+***	—	—	1620
		6.8	12.0 × 22.0 × 41.5	B32526R3685+***	—	—	1620
		10	12.0 × 22.0 × 41.5	B32526R3106+***	—	—	1620
		15	14.0 × 25.0 × 41.5	B32526R3156+***	—	—	1380
		15	24.0 × 15.0 × 41.5	B32526T3156+***	—	—	1040
		22	16.0 × 28.5 × 41.5	B32526R3226+***	—	—	800
		22	24.0 × 19.0 × 41.5	B32526T3226+***	—	—	780
		33	20.0 × 39.5 × 41.5	B32526R3336+***	—	—	640
		47	20.0 × 39.5 × 41.5	B32526R3476+***	—	—	640
		68	28.0 × 42.5 × 41.5	B32526R3686+***	—	—	440

MOQ = Minimum Order Quantity, consisting of 4 packing units.

Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M =  $\pm 20\%$ 

K =  $\pm 10\%$ 


J =  $\pm 5\%$ 

A =  $-15 \dots +5\%$  (220  $\mu F$  type only)

\*\*\* = Packaging code:

000 = Untaped (standard lead length 6 – 1 mm)




**Ordering codes and packing units (lead spacing 37.5 mm)**

$V_R$	$V_{RMS}$ $f \leq 60$ Hz	$C_R$	Max. dimensions $w \times h \times l$ mm	Ordering code (composition see below)	Ammo pack pcs./MOQ	Reel pcs./MOQ	Untaped pcs./MOQ
V DC	V AC	$\mu F$					
400	200	3.3	12.0 × 22.0 × 41.5	B32526R6335+***	–	–	1620
		4.7	12.0 × 22.0 × 41.5	B32526R6475+***	–	–	1620
		5.6	24.0 × 15.0 × 41.5	B32526T6565+***	–	–	1040
		6.8	14.0 × 25.0 × 41.5	B32526R6685+***	–	–	1380
		8.2	24.0 × 19.0 × 41.5	B32526T6825+***	–	–	780
		10	18.0 × 32.5 × 41.5	B32526R6106+***	–	–	720
		15	20.0 × 39.5 × 41.5	B32526R6156+***	–	–	640
		22	28.0 × 42.5 × 41.5	B32526R6226+***	–	–	440

MOQ = Minimum Order Quantity, consisting of 4 packing units.  
 Further E series and intermediate capacitance values on request.

**Composition of ordering code**

+ = Capacitance tolerance code:

M = ±20%


K = ±10%

J = ±5%

A = -15 ... +5% (220  $\mu F$  type only)

\*\*\* = Packaging code:

000 = Untaped (standard lead length 6 – 1 mm)


**B32520 ... B32529**
**General purpose (stacked/wound)**
**Technical data**

Operating temperature range	Max. operating temperature $T_{op,max}$ +125 °C			
	Upper category temperature $T_{max}$ +125 °C			
	Lower category temperature $T_{min}$ -55 °C			
	Rated temperature $T_R$ +85 °C			
Dissipation factor $\tan \delta$ (in $10^{-3}$ ) at 20 °C (upper limit values)	at	$C_R \leq 0.1 \mu F$	$0.1 \mu F < C_R \leq 1 \mu F$	$C_R > 1 \mu F$
	1 kHz	8	8	10
	10 kHz	15	15	—
	100 kHz	30	—	—
Insulation resistance $R_{ins}$ or time constant $\tau = C_R \cdot R_{ins}$ at 20 °C, rel. humidity $\leq 65\%$ (minimum as-delivered values)	$V_R$	$C_R \leq 0.33 \mu F$		$C_R > 0.33 \mu F$
	$\leq 100$ V DC	3750 M $\Omega$		1250 s
	$\geq 250$ V DC	7500 M $\Omega$		2500 s
DC test voltage	$1.4 \cdot V_R, 2$ s			
Category voltage $V_C$ (continuous operation with $V_{DC}$ or $V_{AC}$ at $f \leq 60$ Hz)	$T_A$ (°C)	DC voltage derating		AC voltage derating
	$T_A \leq 85$ $85 < T_A \leq 125$	$V_C = V_R$ $V_C = V_R \cdot (165 - T_A) / 80$		$V_{C,RMS} = V_{RMS}$ $V_{C,RMS} = V_{RMS} \cdot (165 - T_A) / 80$
Operating voltage $V_{op}$ for short operating periods ( $V_{DC}$ or $V_{AC}$ at $f \leq 60$ Hz)	$T_A$ (°C)	DC voltage (max. hours)		AC voltage (max. hours)
	$T_A \leq 100$ $100 < T_A \leq 125$	$V_{op} = 1.25 \cdot V_C$ (2000 h) $V_{op} = 1.25 \cdot V_C$ (1000 h)		$V_{op} = 1.0 \cdot V_{C,RMS}$ (2000 h) $V_{op} = 1.0 \cdot V_{C,RMS}$ (1000 h)
Damp heat test Limit values after damp heat test	56 days/40 °C/93% relative humidity			
	Capacitance change $ \Delta C/C $		$\leq 5\%$	
	Dissipation factor change $\Delta \tan \delta$		$\leq 5 \cdot 10^{-3}$ (at 1 kHz)	
	Insulation resistance $R_{ins}$ or time constant $\tau = C_R \cdot R_{ins}$		$\geq 50\%$ of minimum as-delivered values	
Reliability: Failure rate $\lambda$ Service life $t_{SL}$	1 fit ( $\leq 1 \cdot 10^{-9}/h$ ) at $0.5 \cdot V_R, 40$ °C 200 000 h at $1.0 \cdot V_R, 85$ °C For conversion to other operating conditions and temperatures, refer to chapter "Quality, 2 Reliability".			
Failure criteria: Total failure Failure due to variation of parameters	Short circuit or open circuit			
	Capacitance change $ \Delta C/C $		$> 10\%$	
	Dissipation factor $\tan \delta$		$> 2 \cdot$ upper limit value	
	Insulation resistance $R_{ins}$ or time constant $\tau = C_R \cdot R_{ins}$		$< 150$ M $\Omega$ ( $C_R \leq 0.33 \mu F$ ) $< 50$ s ( $C_R > 0.33 \mu F$ )	

### Pulse handling capability

"dV/dt" represents the maximum permissible voltage change per unit of time for non-sinusoidal voltages, expressed in V/ $\mu$ s.

"k<sub>0</sub>" represents the maximum permissible pulse characteristic of the waveform applied to the capacitor, expressed in V<sup>2</sup>/ $\mu$ s.

*Note:*

*The values of dV/dt and k<sub>0</sub> provided below must not be exceeded in order to avoid damaging the capacitor.*

### dV/dt values


Lead spacing	5 mm	7.5 mm	10 mm		15 mm		22.5 mm	27.5 mm	37.5 mm	
Technology	S	S	S	W	S	W	W	W	W	
V <sub>R</sub> V DC	V <sub>RMS</sub> V AC	dV/dt in V/ $\mu$ s								
50	32	200	–	–	–	–	–	–	–	–
63	40	250	120	50	–	30	–	3	1	0.8
100	63	300	150	75	–	50	5	4	3	1
250	160	400	200	150	–	100	10	8	5	4
400	200	600	275	175	–	125	–	10	8.5	6
450	200	–	–	–	–	–	20	–	–	–
630	400	800	–	320	–	150	–	15	12	–

S = Stacked, W = Wound

### k<sub>0</sub> values

Lead spacing	5 mm	7.5 mm	10 mm		15 mm		22.5 mm	27.5 mm	37.5 mm	
Technology	S	S	S	W	S	W	W	W	W	
V <sub>R</sub> V DC	V <sub>RMS</sub> V AC	k <sub>0</sub> in V <sup>2</sup> / $\mu$ s								
50	32	20000	–	–	–	–	–	–	–	–
63	40	30000	15000	6300	–	3800	–	375	130	100
100	63	60000	30000	15000	–	10000	850	800	600	200
250	160	200000	100000	75000	–	50000	5000	4000	2500	2000
400	200	500000	220000	140000	–	100000	–	10000	8500	6000
450	200	–	–	–	–	–	15000	–	–	–
630	400	1000000	–	400000	–	190000	–	18000	15000	–

S = Stacked, W = Wound





**B32520 ... B32529**

**General purpose (stacked/wound)**





**Impedance Z versus frequency f**


(typical values)

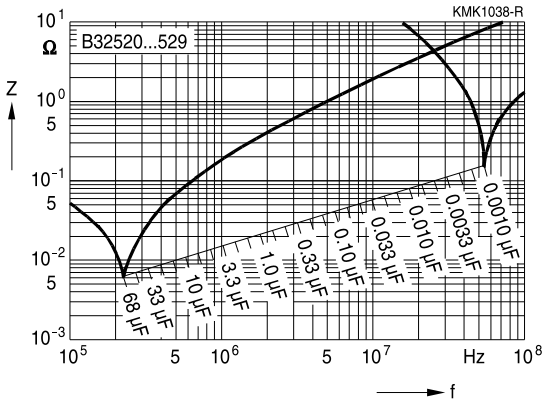


**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ\text{C}$ )**

 For  $T_A > 55^\circ\text{C}$ , please refer to "General technical information", section 3.2.3.

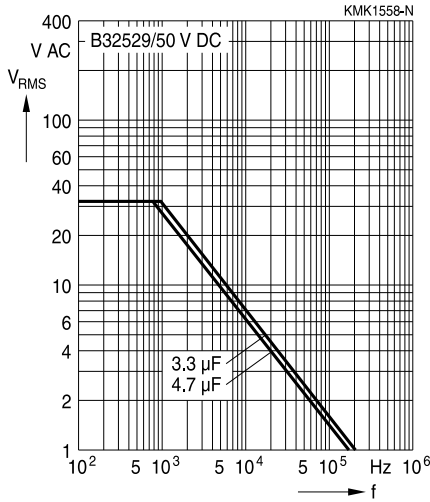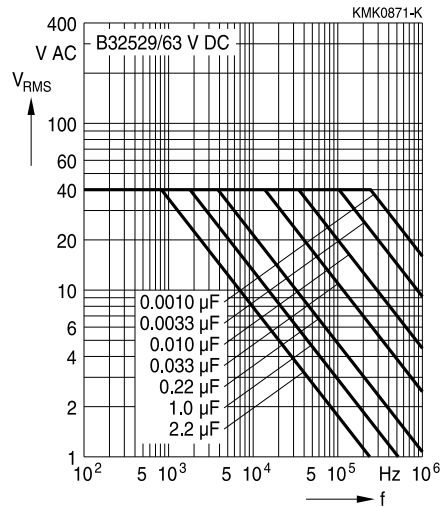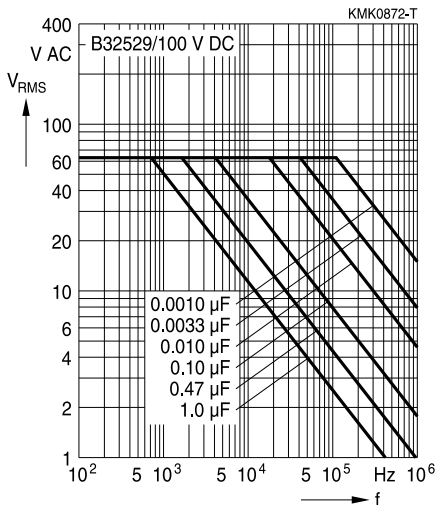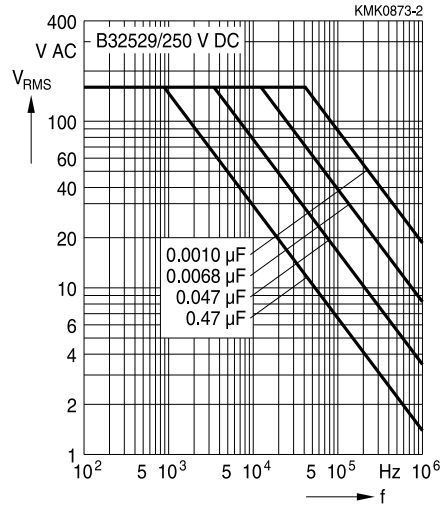**Lead spacing 5 mm**
**50 V DC/32 V AC**

**63 V DC/40 V AC**

**100 V DC/63 V AC**

**250 V DC/160 V AC**




**B32529**


**General purpose (stacked)**

**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )**


For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.


**Lead spacing 5 mm**

400 V DC/200 V AC

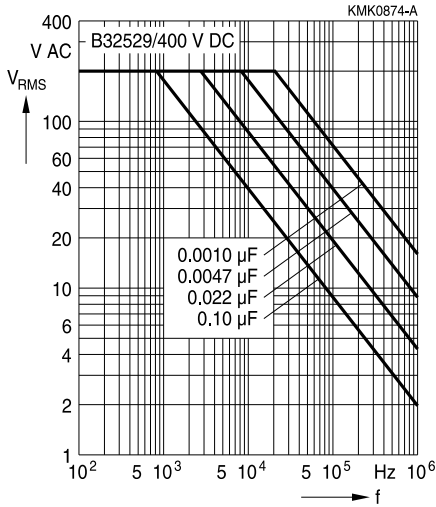

630 V DC/400 V AC

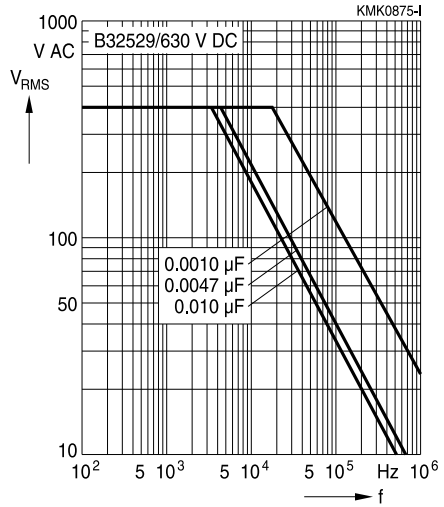





**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )**  
 For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 7.5 mm**


63 V DC/40 V AC

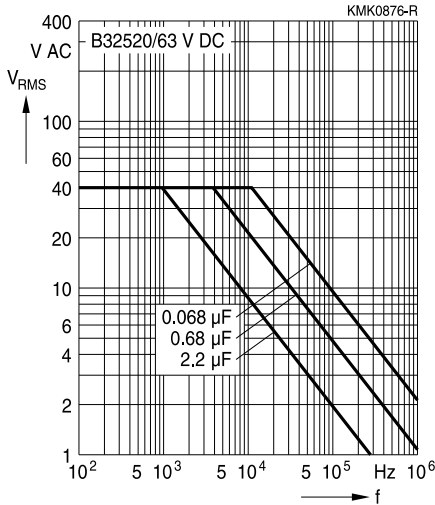


100 V DC/63 V AC

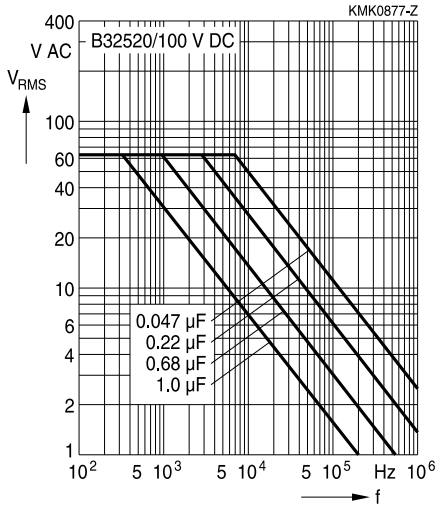


250 V DC/160 V AC

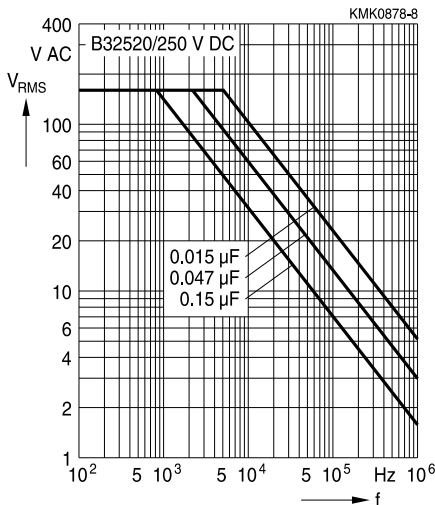

400 V DC/200 V AC

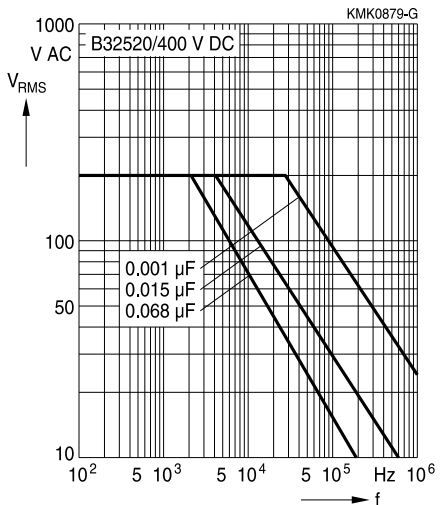



**B32521**


**General purpose (stacked/wound)**

**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )**


For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 10 mm**


63 V DC/40 V AC

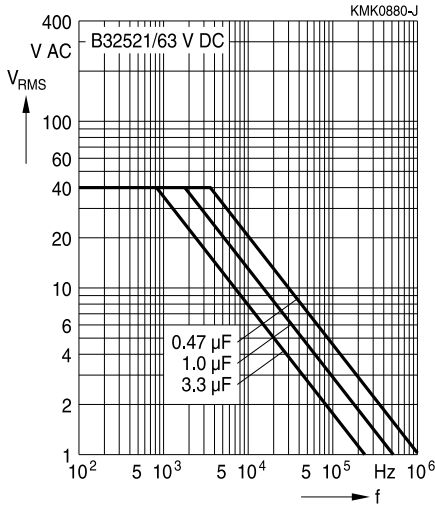


100 V DC/63 V AC

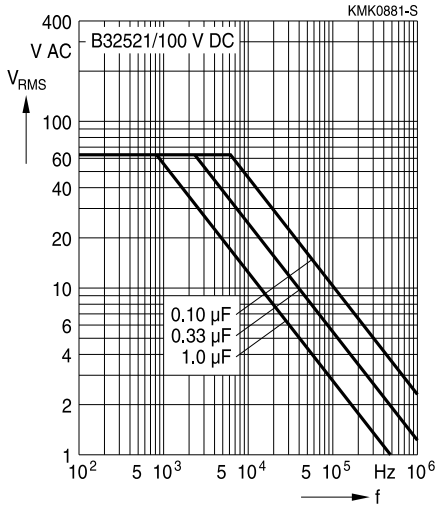


250 V DC/160 V AC

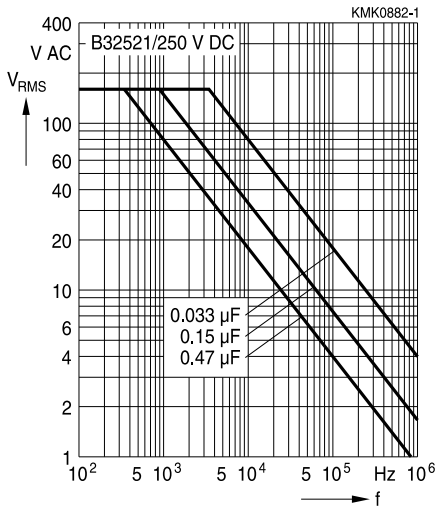

400 V DC/200 V AC

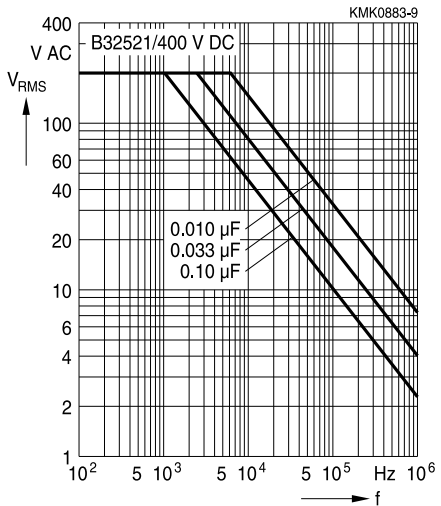







**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )**  
 For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 10 mm**

630 V DC/200 V AC

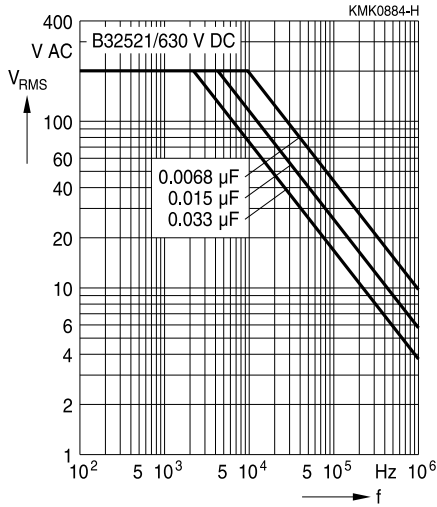



**B32522**


**General purpose (stacked/wound)**

**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ\text{C}$ )**


For  $T_A > 55^\circ\text{C}$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 15 mm**


63 V DC/40 V AC

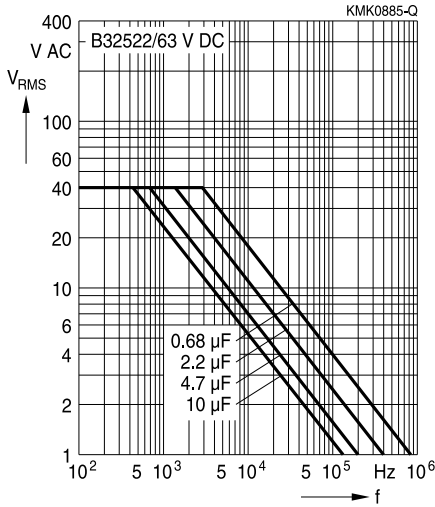


100 V DC/63 V AC

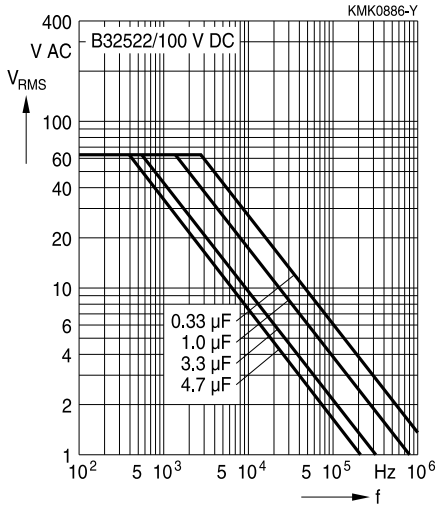


250 V DC/160 V AC

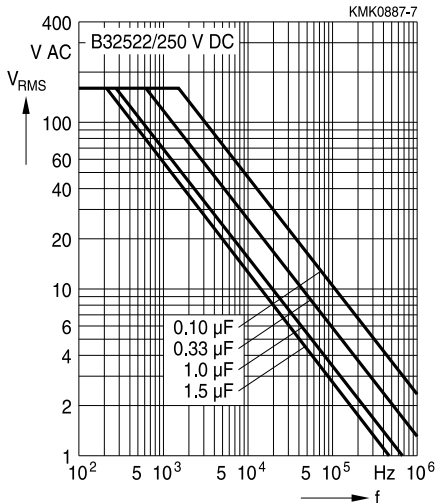

400 V DC/200 V AC

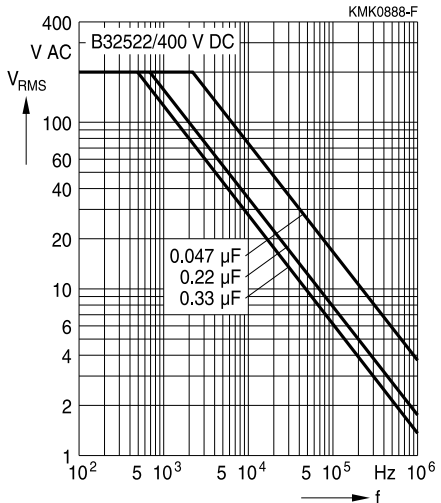




**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )**


For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.


**Lead spacing 15 mm**

450 V DC/200 V AC

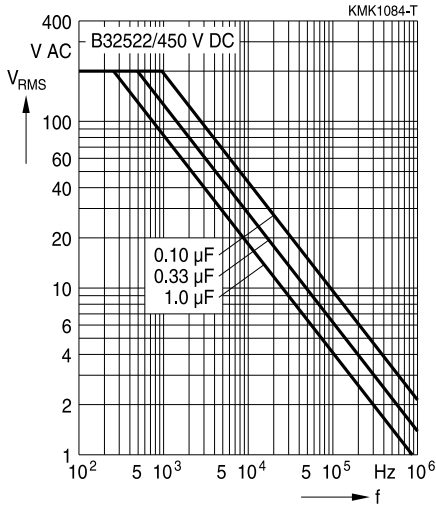

630 V DC/200 V AC

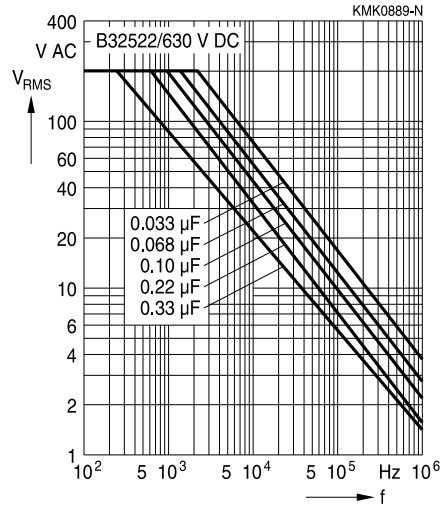




**B32523**

**General purpose (wound)**


**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )**  
 For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 22.5 mm**


**63 V DC/40 V AC**

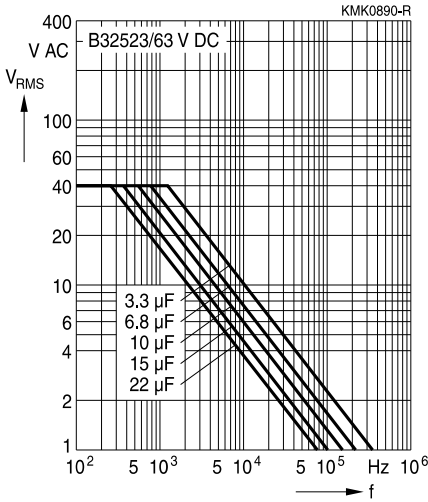


**100 V DC/63 V AC**

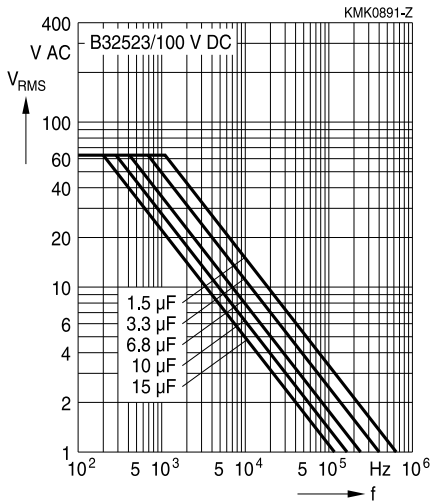


**250 V DC/160 V AC**

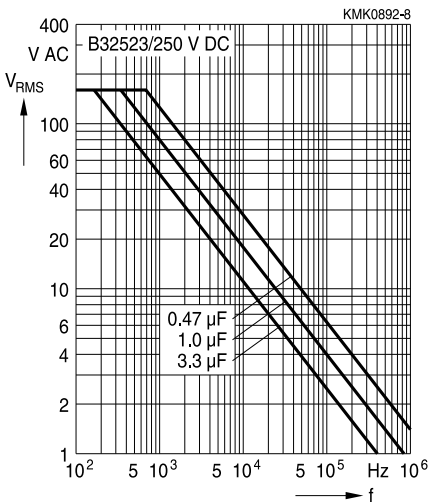

**400 V DC/200 V AC**

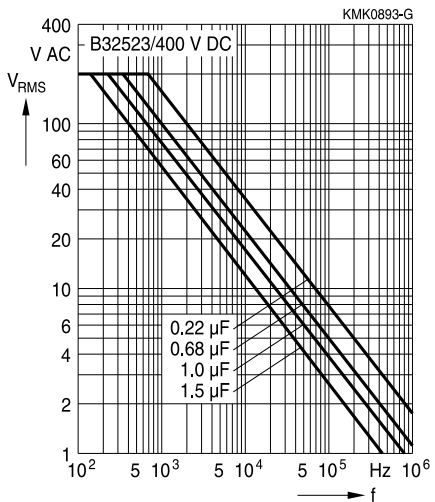





**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )**

For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 22.5 mm**

630 V DC/200 V AC

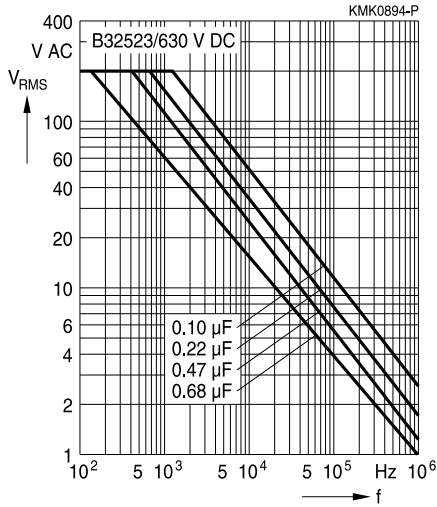




**B32524**

**General purpose (wound)**


**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )**  
 For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 27.5 mm**


63 V DC/40 V AC

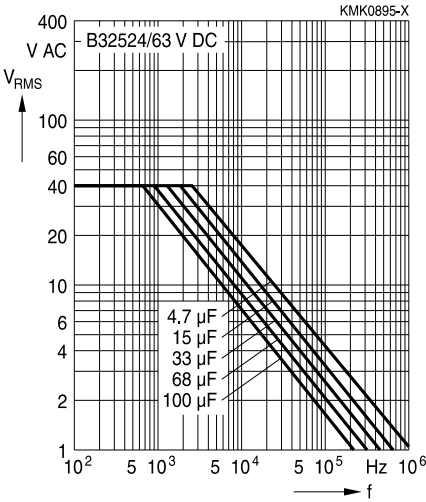


100 V DC/63 V AC

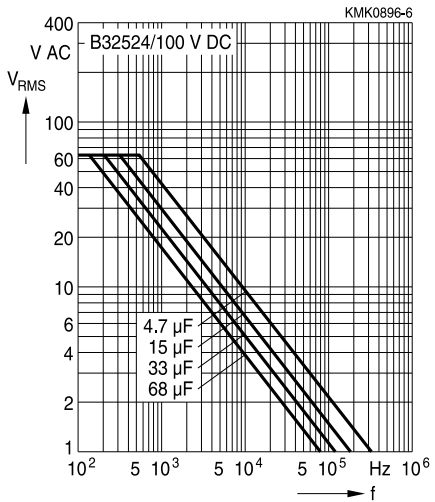


250 V DC/160 V AC

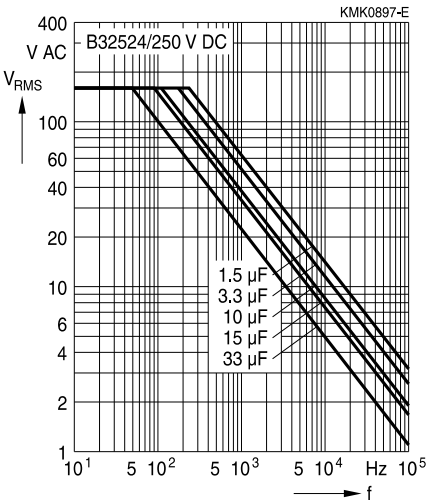

400 V DC/200 V AC

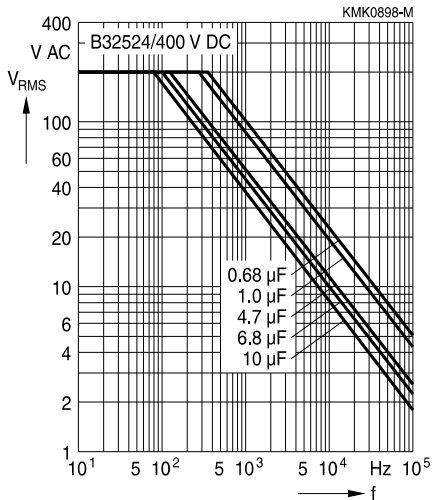





**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )**

For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 27.5 mm**

630 V DC/220 V AC

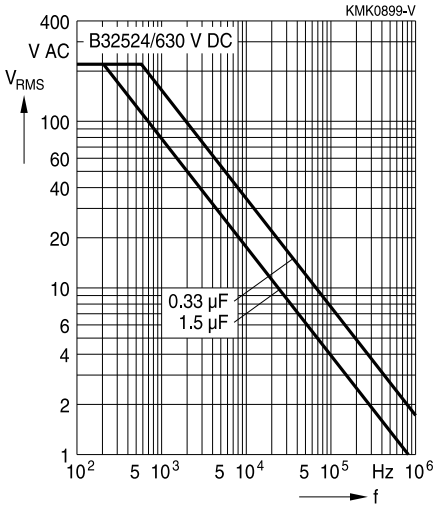



**B32526**


**General purpose (wound)**

**Permissible AC voltage  $V_{RMS}$  versus frequency  $f$  (for sinusoidal waveforms,  $T_A \leq 55^\circ C$ )**


For  $T_A > 55^\circ C$ , please refer to "General technical information", section 3.2.3.

**Lead spacing 37.5 mm**


63 V DC/40 V AC

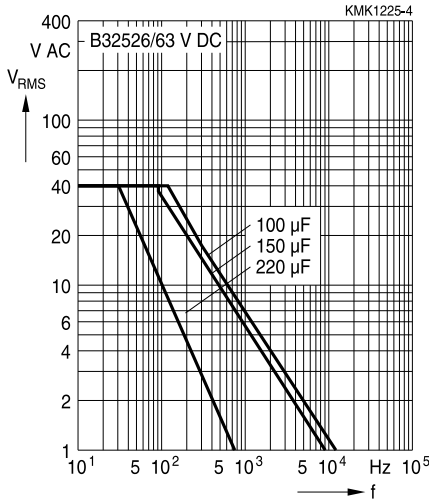


100 V DC/63 V AC

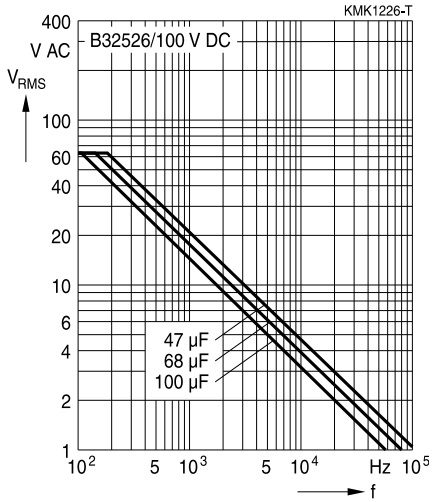


250 V DC/160 V AC

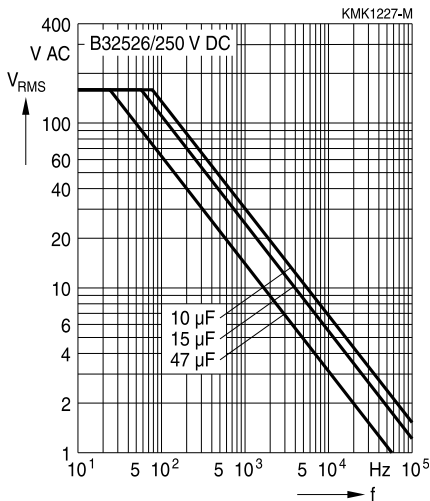

400 V DC/200 V AC

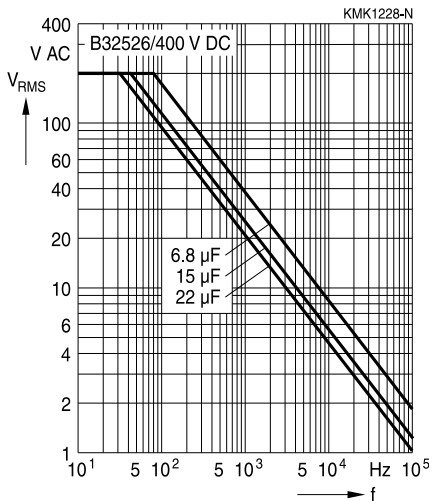





## Mounting guidelines

### 1 Soldering

#### 1.1 Solderability of leads

The solderability of terminal leads is tested to IEC 60068-2-20, test Ta, method 1.

Before a solderability test is carried out, terminals are subjected to accelerated ageing (to IEC 60068-2-2, test Ba: 4 h exposure to dry heat at 155 °C). Since the ageing temperature is far higher than the upper category temperature of the capacitors, the terminal wires should be cut off from the capacitor before the ageing procedure to prevent the solderability being impaired by the products of any capacitor decomposition that might occur.


Solder bath temperature	235 ±5 °C
Soldering time	2.0 ±0.5 s
Immersion depth	2.0 +0/-0.5 mm from capacitor body or seating plane
Evaluation criteria:	
Visual inspection	Wetting of wire surface by new solder ≥90%, free-flowing solder

#### 1.2 Resistance to soldering heat

Resistance to soldering heat is tested to IEC 60068-2-20, test Tb, method 1A.


Conditions:

Series	Solder bath temperature	Soldering time
MKT boxed (except 2.5 × 6.5 × 7.2 mm) coated uncoated (lead spacing > 10 mm)	260 ±5 °C	10 ±1 s
MFP MKP (lead spacing > 7.5 mm)		
MKT boxed (case 2.5 × 6.5 × 7.2 mm)		5 ±1 s
MKP (lead spacing ≤ 7.5 mm)		< 4 s
MKT uncoated (lead spacing ≤ 10 mm) insulated (B32559)		recommended soldering profile for MKT uncoated (lead spacing ≤ 10 mm) and insulated (B32559)




**B32520 ... B32529**

**General purpose (stacked/wound)**

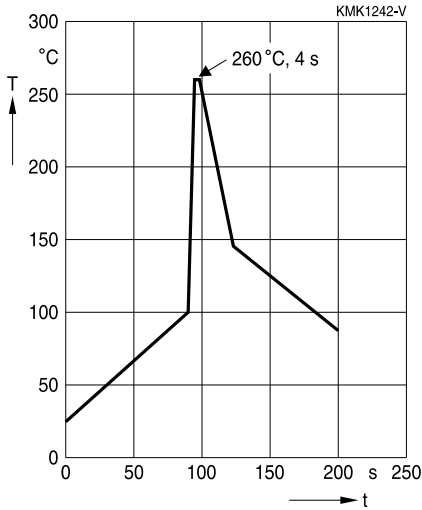

Immersion depth	2.0 +0/−0.5 mm from capacitor body or seating plane
Shield	Heat-absorbing board, (1.5 ±0.5) mm thick, between capacitor body and liquid solder
Evaluation criteria:	
Visual inspection	No visible damage
$\Delta C/C_0$	2% for MKT/MKP/MFP 5% for EMI suppression capacitors
$\tan \delta$	As specified in sectional specification



### 1.3 General notes on soldering

Permissible heat exposure loads on film capacitors are primarily characterized by the upper category temperature  $T_{max}$ . Long exposure to temperatures above this type-related temperature limit can lead to changes in the plastic dielectric and thus change irreversibly a capacitor's electrical characteristics. For short exposures (as in practical soldering processes) the heat load (and thus the possible effects on a capacitor) will also depend on other factors like:

- Pre-heating temperature and time
- Forced cooling immediately after soldering
- Terminal characteristics:
  - diameter, length, thermal resistance, special configurations (e.g. crimping)
- Height of capacitor above solder bath
- Shadowing by neighboring components
- Additional heating due to heat dissipation by neighboring components
- Use of solder-resist coatings

The overheating associated with some of these factors can usually be reduced by suitable countermeasures. For example, if a pre-heating step cannot be avoided, an additional or reinforced cooling process may possibly have to be included.


EPCOS recommends the following conditions:

- Pre-heating with a maximum temperature of 110 °C
- Temperature inside the capacitor should not exceed the following limits:
  - MKP/MFP 110 °C
  - MKT 160 °C
- When SMD components are used together with leaded ones, the leaded film capacitors should not pass into the SMD adhesive curing oven. The leaded components should be assembled after the SMD curing step.
- Leaded film capacitors are not suitable for reflow soldering.

#### Uncoated capacitors

For uncoated MKT capacitors with lead spacings  $\leq 10$  mm (B32560/B32561) the following measures are recommended:


- pre-heating to not more than 110 °C in the preheater phase
- rapid cooling after soldering


**B32520 ... B32529**
**General purpose (stacked/wound)**
**Cautions and warnings**

- Do not exceed the upper category temperature (UCT).
- Do not apply any mechanical stress to the capacitor terminals.
- Avoid any compressive, tensile or flexural stress.
- Do not move the capacitor after it has been soldered to the PC board.
- Do not pick up the PC board by the soldered capacitor.
- Do not place the capacitor on a PC board whose PTH hole spacing differs from the specified lead spacing.
- Do not exceed the specified time or temperature limits during soldering.
- Avoid external energy inputs, such as fire or electricity.
- Avoid overload of the capacitors.

The table below summarizes the safety instructions that must always be observed. A detailed description can be found in the relevant sections of the chapters "General technical information" and "Mounting guidelines".


Topic	Safety information	Reference chapter "General technical information"
Storage conditions	Make sure that capacitors are stored within the specified range of time, temperature and humidity conditions.	4.5 "Storage conditions"
Flammability	Avoid external energy, such as fire or electricity (passive flammability), avoid overload of the capacitors (active flammability) and consider the flammability of materials.	5.3 "Flammability"
Resistance to vibration	Do not exceed the tested ability to withstand vibration. The capacitors are tested to IEC 60068-2-6. EPCOS offers film capacitors specially designed for operation under more severe vibration regimes such as those found in automotive applications. Consult our catalog "Film Capacitors for Automotive Electronics".	5.2 "Resistance to vibration"



Topic	Safety information	Reference chapter "Mounting guidelines"
Soldering	Do not exceed the specified time or temperature limits during soldering.	1 "Soldering"
Cleaning	Use only suitable solvents for cleaning capacitors.	2 "Cleaning"
Embedding of capacitors in finished assemblies	When embedding finished circuit assemblies in plastic resins, chemical and thermal influences must be taken into account. Caution: Consult us first, if you also wish to embed other uncoated component types!	3 "Embedding of capacitors in finished assemblies"

### Display of ordering codes for EPCOS products


The ordering code for one and the same product can be represented differently in data sheets, data books, other publications and the website of EPCOS, or in order-related documents such as shipping notes, order confirmations and product labels. **The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products.** Detailed information can be found on the Internet under [www.epcos.com/orderingcodes](http://www.epcos.com/orderingcodes).


**B32520 ... B32529**
**General purpose (stacked/wound)**
**Symbols and terms**

Symbol	English	German
$\alpha$	Heat transfer coefficient	Wärmeübergangszahl
$\alpha_C$	Temperature coefficient of capacitance	Temperaturkoeffizient der Kapazität
A	Capacitor surface area	Kondensatoroberfläche
$\beta_C$	Humidity coefficient of capacitance	Feuchtekoeffizient der Kapazität
C	Capacitance	Kapazität
$C_R$	Rated capacitance	Nennkapazität
$\Delta C$	Absolute capacitance change	Absolute Kapazitätsänderung
$\Delta C/C$	Relative capacitance change (relative deviation of actual value)	Relative Kapazitätsänderung (relative Abweichung vom Ist-Wert)
$\Delta C/C_R$	Capacitance tolerance (relative deviation from rated capacitance)	Kapazitätstoleranz (relative Abweichung vom Nennwert)
dt	Time differential	Differentielle Zeit
$\Delta t$	Time interval	Zeitintervall
$\Delta T$	Absolute temperature change (self-heating)	Absolute Temperaturänderung (Selbsterwärmung)
$\Delta \tan \delta$	Absolute change of dissipation factor	Absolute Änderung des Verlustfaktors
$\Delta V$	Absolute voltage change	Absolute Spannungsänderung
dV/dt	Time differential of voltage function (rate of voltage rise)	Differentielle Spannungsänderung (Spannungsflankensteilheit)
$\Delta V/\Delta t$	Voltage change per time interval	Spannungsänderung pro Zeitintervall
E	Activation energy for diffusion	Aktivierungsenergie zur Diffusion
ESL	Self-inductance	Eigeninduktivität
ESR	Equivalent series resistance	Ersatz-Serienwiderstand
f	Frequency	Frequenz
$f_1$	Frequency limit for reducing permissible AC voltage due to thermal limits	Grenzfrequenz für thermisch bedingte Reduzierung der zulässigen Wechselspannung
$f_2$	Frequency limit for reducing permissible AC voltage due to current limit	Grenzfrequenz für strombedingte Reduzierung der zulässigen Wechselspannung
$f_r$	Resonant frequency	Resonanzfrequenz
$F_D$	Thermal acceleration factor for diffusion	Therm. Beschleunigungsfaktor zur Diffusion
$F_T$	Derating factor	Deratingfaktor
i	Current (peak)	Stromspitze
$I_C$	Category current (max. continuous current)	Kategoriestrom (max. Dauerstrom)

**General purpose (stacked/wound)**

Symbol	English	German
$I_{RMS}$	(Sinusoidal) alternating current, root-mean-square value	(Sinusförmiger) Wechselstrom
$i_z$	Capacitance drift	Inkonstanz der Kapazität
$k_0$	Pulse characteristic	Impuls Kennwert
$L_S$	Series inductance	Serieninduktivität
$\lambda$	Failure rate	Ausfallrate
$\lambda_0$	Constant failure rate during useful service life	Konstante Ausfallrate in der Nutzungsphase
$\lambda_{test}$	Failure rate, determined by tests	Experimentell ermittelte Ausfallrate
$P_{diss}$	Dissipated power	Abgegebene Verlustleistung
$P_{gen}$	Generated power	Erzeugte Verlustleistung
$Q$	Heat energy	Wärmeenergie
$\rho$	Density of water vapor in air	Dichte von Wasserdampf in Luft
$R$	Universal molar constant for gases	Allg. Molarkonstante für Gas
$R$	Ohmic resistance of discharge circuit	Ohmscher Widerstand des Entladekreises
$R_i$	Internal resistance	Innenwiderstand
$R_{ins}$	Insulation resistance	Isolationswiderstand
$R_P$	Parallel resistance	Parallelwiderstand
$R_S$	Series resistance	Serienwiderstand
$S$	severity (humidity test)	Schärfegrad (Feuchtestest)
$t$	Time	Zeit
$T$	Temperature	Temperatur
$\tau$	Time constant	Zeitkonstante
$\tan \delta$	Dissipation factor	Verlustfaktor
$\tan \delta_D$	Dielectric component of dissipation factor	Dielektrischer Anteil des Verlustfaktors
$\tan \delta_P$	Parallel component of dissipation factor	Parallelanteil des Verlustfaktors
$\tan \delta_S$	Series component of dissipation factor	Serienanteil des Verlustfaktors
$T_A$	Ambient temperature	Umgebungstemperatur
$T_{max}$	Upper category temperature	Obere Kategorietemperatur
$T_{min}$	Lower category temperature	Untere Kategorietemperatur
$t_{OL}$	Operating life at operating temperature and voltage	Betriebszeit bei Betriebstemperatur und -spannung
$T_{op}$	Operating temperature	Betriebstemperatur
$T_R$	Rated temperature	Nenntemperatur
$T_{ref}$	Reference temperature	Referenztemperatur
$t_{SL}$	Reference service life	Referenz-Lebensdauer
$V_{AC}$	AC voltage	Wechselspannung


**B32520 ... B32529**
**General purpose (stacked/wound)**

Symbol	English	German
$V_C$	Category voltage	Kategoriespannung
$V_{C,RMS}$	Category AC voltage	(Sinusförmige) Kategorie-Wechselspannung
$V_{CD}$	Corona-discharge onset voltage	Teilentlade-Einsatzspannung
$V_{ch}$	Charging voltage	Ladespannung
$V_{DC}$	DC voltage	Gleichspannung
$V_{FB}$	Fly-back capacitor voltage	Spannung (Flyback)
$V_i$	Input voltage	Eingangsspannung
$V_o$	Output voltage	Ausgangssspannung
$V_{op}$	Operating voltage	Betriebsspannung
$V_p$	Peak pulse voltage	Impuls-Spitzenspannung
$V_{pp}$	Peak-to-peak voltage Impedance	Spannungshub
$V_R$	Rated voltage	Nennspannung
$\hat{V}_R$	Amplitude of rated AC voltage	Amplitude der Nenn-Wechselspannung
$V_{RMS}$	(Sinusoidal) alternating voltage, root-mean-square value	(Sinusförmige) Wechselspannung
$V_{SC}$	S-correction voltage	Spannung bei Anwendung "S-correction"
$V_{sn}$	Snubber capacitor voltage	Spannung bei Anwendung "Beschaltung"
$Z$	Impedance	Scheinwiderstand
$e$	Lead spacing	Rastermaß



## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CeraPlas, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).