

Features

- High Surge Capability
- Types up to $100\text{ V } V_{RRM}$

D-67 Package



Maximum ratings, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified ("R" devices have leads reversed)

| Parameter | Symbol | Conditions | MBRH12020 (R) | MBRH12030 (R) | MBRH12035 (R) | MBRH12040 (R) | Unit |
|--|------------|--|---------------|---------------|---------------|---------------|------------------|
| Repetitive peak reverse voltage | V_{RRM} | | 20 | 30 | 35 | 40 | V |
| RMS reverse voltage | V_{RMS} | | 14 | 21 | 25 | 28 | V |
| DC blocking voltage | V_{DC} | | 20 | 30 | 35 | 40 | V |
| Continuous forward current | I_F | $T_C \leq 136\text{ }^\circ\text{C}$ | 120 | 120 | 120 | 120 | A |
| Surge non-repetitive forward current, Half Sine Wave | $I_{F,SM}$ | $T_C = 25\text{ }^\circ\text{C}$, $t_p = 8.3\text{ ms}$ | 2000 | 2000 | 2000 | 2000 | A |
| Operating temperature | T_j | | -40 to 175 | -40 to 175 | -40 to 175 | -40 to 175 | $^\circ\text{C}$ |
| Storage temperature | T_{stg} | | -40 to 175 | -40 to 175 | -40 to 175 | -40 to 175 | $^\circ\text{C}$ |

Electrical characteristics, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified

| Parameter | Symbol | Conditions | MBRH12020 (R) | MBRH12030 (R) | MBRH12035 (R) | MBRH12040 (R) | Unit |
|-----------------------|--------|---|---------------|---------------|---------------|---------------|------|
| Diode forward voltage | V_F | $I_F = 120\text{ A}$, $T_j = 25\text{ }^\circ\text{C}$ | 0.65 | 0.65 | 0.65 | 0.65 | V |
| Reverse current | I_R | $V_R = 20\text{ V}$, $T_j = 25\text{ }^\circ\text{C}$ | 4 | 4 | 4 | 4 | mA |
| | | $V_R = 20\text{ V}$, $T_j = 125\text{ }^\circ\text{C}$ | 250 | 250 | 250 | 250 | |

Thermal characteristics

| | | | | | | | |
|-------------------------------------|------------|--|-----|-----|-----|-----|--------------------|
| Thermal resistance, junction - case | R_{thJC} | | 0.8 | 0.8 | 0.8 | 0.8 | $^\circ\text{C/W}$ |
|-------------------------------------|------------|--|-----|-----|-----|-----|--------------------|



Figure .1-Typical Forward Characteristics


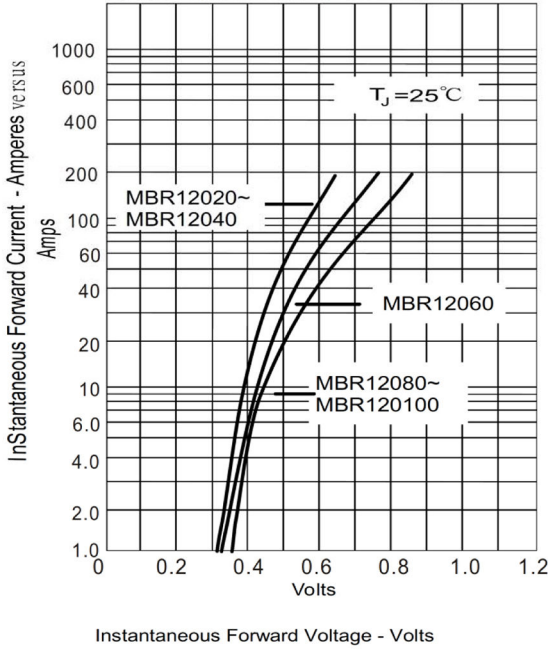


Figure .2-Forward Derating Curve

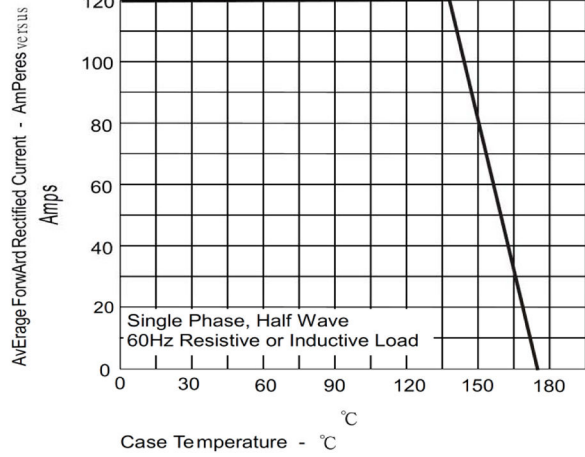

Instantaneous Forward Voltage - Volts

Figure .3-Peak Forward Surge Current

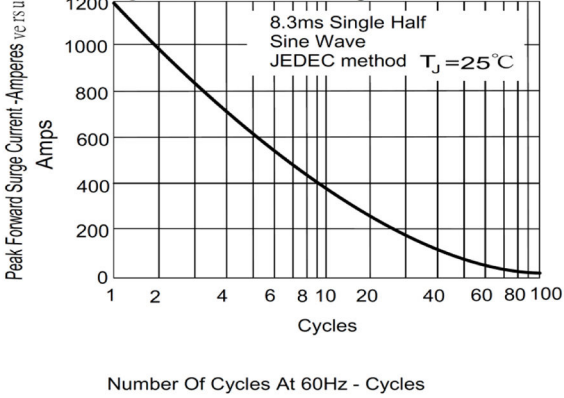


Figure .4-Typical Reverse Characteristics

