

## 2A SURFACE MOUNT SCHOTTKY BRIDGE

### FEATURES:


- Reverse Voltage - 40 to 200 V
- Forward Current - 2 A
- High Surge Current Capability
- Designed for Surface Mount Application

### MECHANICAL DATA

- Case: ABF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 82mg 0.0029oz

### PINNING

PIN	DESCRIPTION
1	Input Pin ( ~ )
2	Input Pin ( ~ )
3	Output Anode ( + )
4	Output Cathode ( - )

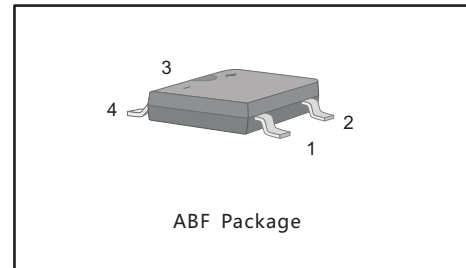

### Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.


Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	TB24F	TB26F	TB28F	TB210F	TB220F	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	40	60	80	100	200	V
Maximum RMS voltage	$V_{RMS}$	28	42	56	70	140	V
Maximum DC Blocking Voltage	$V_{DC}$	40	60	80	100	200	V
Average Rectified Output Current at $T_L = 75\text{ }^\circ\text{C}$	$I_{F(AV)}$	2.0					A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	50		40			A
Max Instantaneous Forward Voltage at 2A	$V_F$	0.55	0.70	0.85			V
Maximum DC Reverse Current $T_a = 25^\circ\text{C}$ at Rated DC Reverse Voltage $T_a = 100^\circ\text{C}$	$I_R$	0.5 10			0.3 5		mA
Typical Junction Capacitance <sup>1)</sup>	$C_j$	220	80				pF
Typical Thermal Resistance <sup>2)</sup>	$R_{\theta JA}$	75					$^\circ\text{C/W}$
Operating Junction Temperature Range	$T_j$	-55 ~ +125					$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 ~ +150					$^\circ\text{C}$


Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.

2. Mounted on glass epoxy PC board with  $4 \times (5 \times 5\text{mm}^2)$  copper pad.


**Fig.1 Average Rectified Output Current Derating Curve**

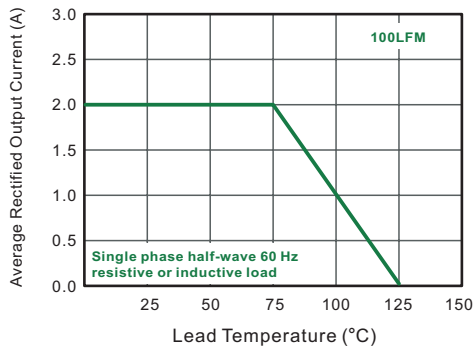


**Fig.2 Typical Reverse Characteristics**

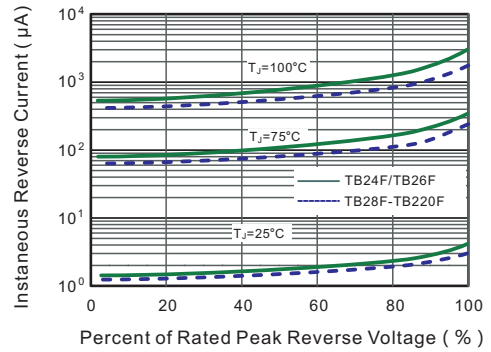


**Fig.3 Typical Forward Characteristic**

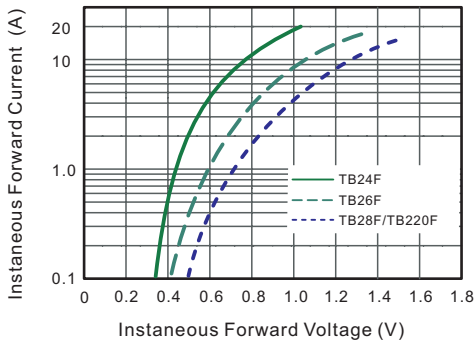

**Fig.4 Typical Junction Capacitance**

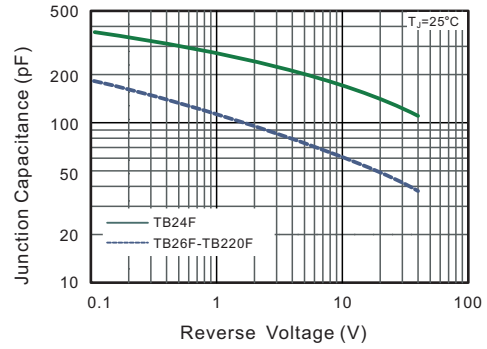


**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

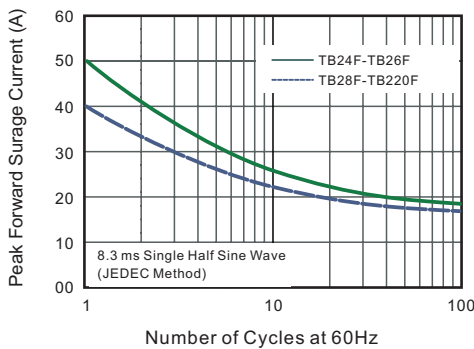


**PACKAGE OUTLINE**

Plastic surface mounted package; 4 leads

ABF

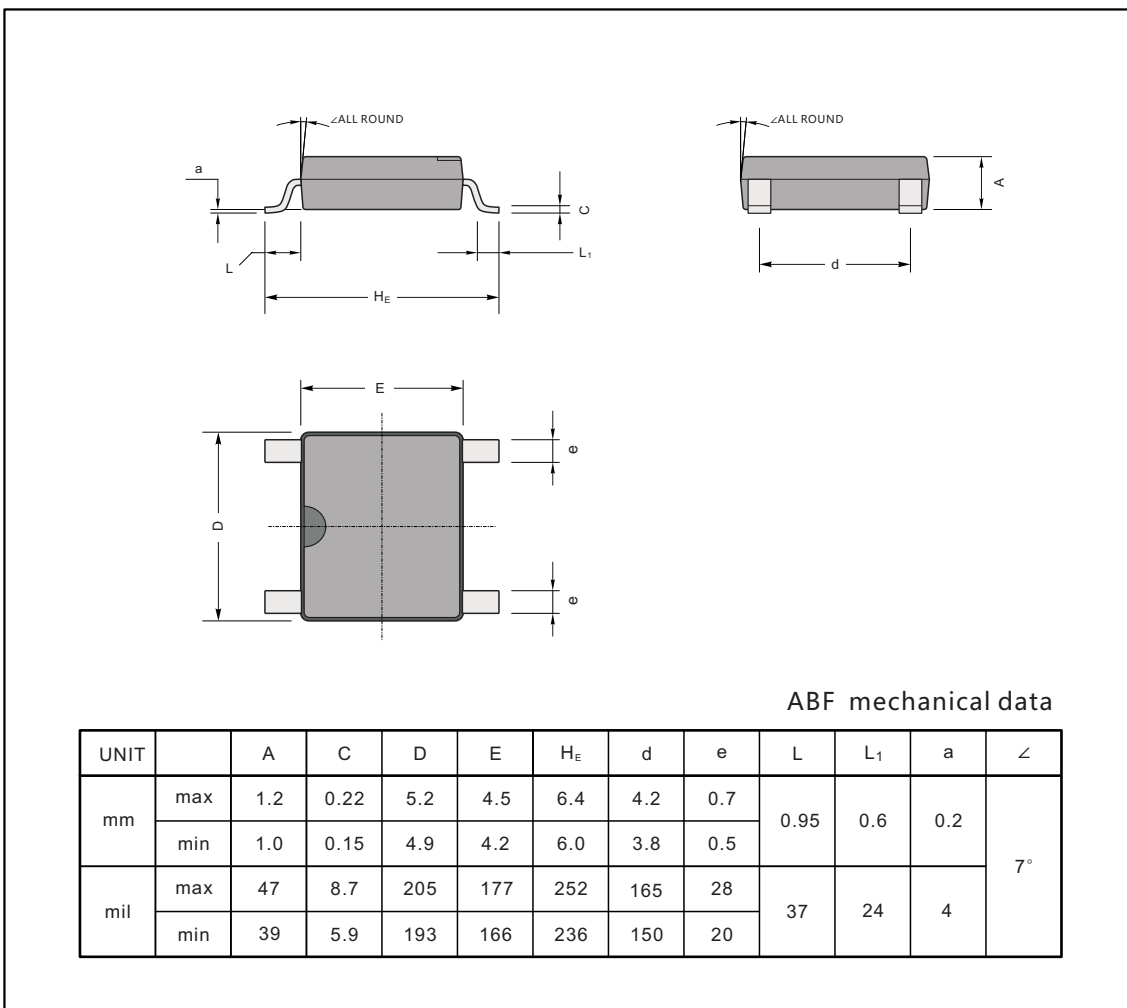

**The recommended mounting pad size**

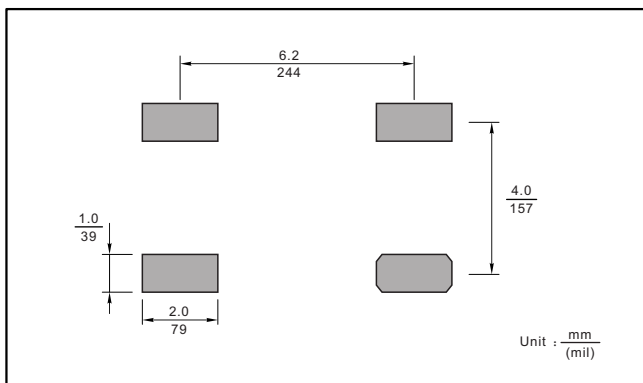

**Marking**

Type number	Marking code
TB24F	TB24F
TB26F	TB26F
TB28F	TB28F
TB210F	TB210F
TB220F	TB220F