




B220A THRU B2100A

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 100 Volts Forward Current - 2.0 Amperes

DO-214AC/SMA

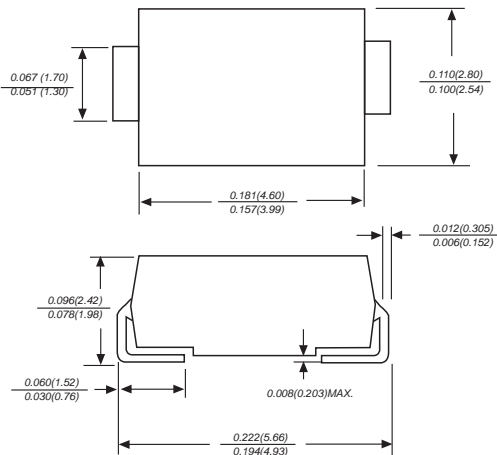

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AC molded plastic body
Terminals: leads solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.070 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

| MDD Catalog Number | SYMBOLS | B220A | B230A | B240A | B250A | B260A | B280A | B2100A | UNITS |
|---|-----------------|-------------|-------|-------|-------|-------|-------------|--------|-------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 20 | 30 | 40 | 50 | 60 | 80 | 100 | VOLTS |
| Maximum RMS voltage | V_{RMS} | 14 | 21 | 28 | 35 | 42 | 56 | 70 | VOLTS |
| Maximum DC blocking voltage | V_{DC} | 20 | 30 | 40 | 50 | 60 | 80 | 100 | VOLTS |
| Maximum average forward rectified current at T_L (see fig. 1) | $I_{(AV)}$ | 2.0 | | | | | | | Amps |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I_{FSM} | 50.0 | | | | | | | Amps |
| Maximum instantaneous forward voltage at 2.0A | V_F | 0.55 | | 0.70 | | 0.85 | | Volts | |
| Maximum DC reverse current at rated DC blocking voltage | I_R | 0.5 | | | | | | | mA |
| $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$ | | 10.0 | | | | 5.0 | | | |
| Typical junction capacitance (NOTE 1) | C_J | 220 | | | 180 | | | pF | |
| Typical thermal resistance (NOTE 2) | $R_{\theta JA}$ | 75.0 | | | | | | | °C/W |
| Operating junction temperature range | T_J | -50 to +125 | | | | | -50 to +150 | | °C |
| Storage temperature range | T_{STG} | -50 to +150 | | | | | | | °C |


Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
 2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas




www.microcode.com

RATINGS AND CHARACTERISTIC CURVES B220A THRU B2100A


AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

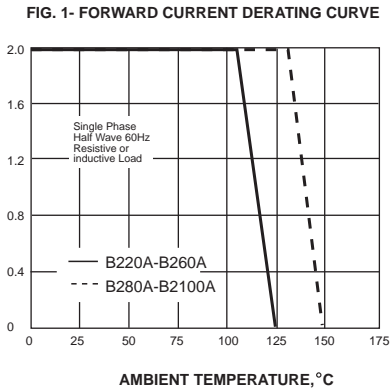


PEAK FORWARD SURGE CURRENT, AMPERES

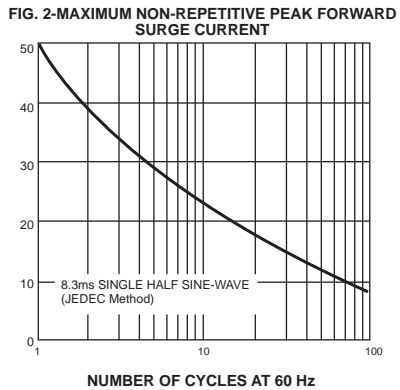


INSTANTANEOUS FORWARD CURRENT, AMPERES

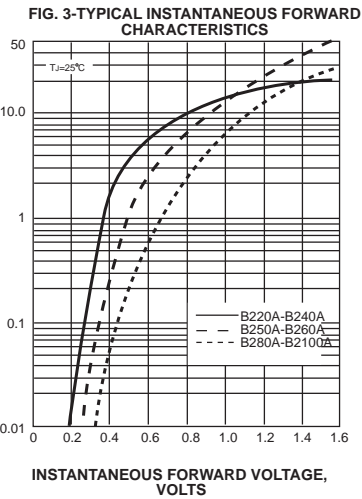


INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES

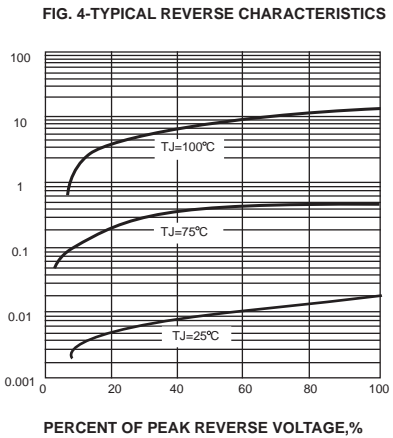

JUNCTION CAPACITANCE, pF

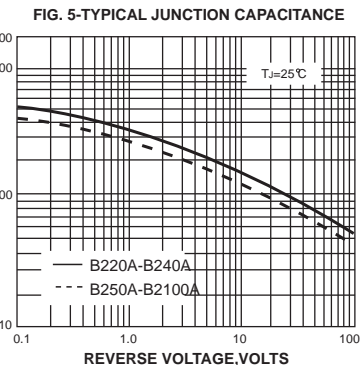

TRANSIENT THERMAL IMPEDANCE, °C/W

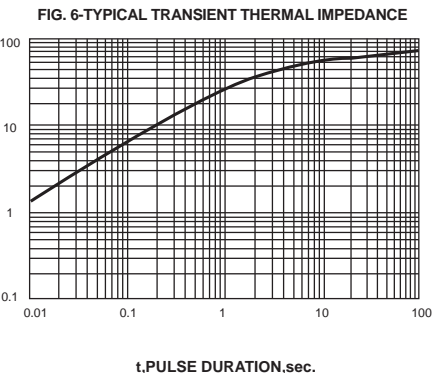

The cruce graph is for reference only, can't be the basis for judgment()!

