

4-Mbit (256 K × 16) Static RAM

Features

- Very high speed: 45 ns
- Temperature range
 - Industrial: -40 °C to +85 °C
- Wide voltage range: 2.20 V to 3.60 V
- Ultra low standby power
 - Typical standby current: 1 μA
 - Maximum standby current: 7 μA (Industrial)
- Ultra low active power
 - Typical active current: 2 mA at f = 1 MHz
- Easy memory expansion with \overline{CE}_1 , CE_2 , and \overline{OE} Features
- Automatic power down when deselected
- Complementary metal oxide semiconductor (CMOS) for optimum speed and power
- Available in Pb-free 44-pin thin small outline package (TSOP) II package
- Byte power down feature

Functional Description

The CY621472E30 is a high performance CMOS static RAM (SRAM) organized as 256K words by 16 bits. This device features advanced circuit design to provide ultra low active current. It is ideal for providing More Battery Life™ (MoBL®) in portable applications such as cellular telephones. The device


also has an automatic power down feature that significantly reduces power consumption when addresses are not toggling. Placing the device into standby mode reduces power consumption by more than 99 percent when deselected (\overline{CE}_1 HIGH or CE_2 LOW or both BLE and BHE are HIGH). The input and output pins (I/O₀ through I/O₁₅) are placed in a high impedance state when:

- Deselected (\overline{CE}_1 HIGH or CE_2 LOW)
- Outputs are disabled (\overline{OE} HIGH)
- Both Byte High Enable and Byte Low Enable are disabled (BHE, BLE HIGH)
- Write operation is active (\overline{CE}_1 LOW and CE_2 HIGH and \overline{WE} LOW)

To write to the device, take Chip Enable (\overline{CE}_1 LOW and CE_2 HIGH) and Write Enable (\overline{WE}) inputs LOW. If Byte Low Enable (BLE) is LOW, then data from I/O pins (I/O₀ through I/O₇) is written into the location specified on the address pins (A₀ through A₁₇). If Byte High Enable (BHE) is LOW, then data from I/O pins (I/O₈ through I/O₁₅) is written into the location specified on the address pins (A₀ through A₁₇).

To read from the device, take Chip Enable (\overline{CE}_1 LOW and CE_2 HIGH) and Output Enable (\overline{OE}) LOW while forcing the Write Enable (\overline{WE}) HIGH. If Byte Low Enable (BLE) is LOW, then data from the memory location specified by the address pins appear on I/O₀ to I/O₇. If Byte High Enable (BHE) is LOW, then data from memory appears on I/O₈ to I/O₁₅. See the [Truth Table on page 11](#) for a complete description of read and write modes.

Logic Block Diagram

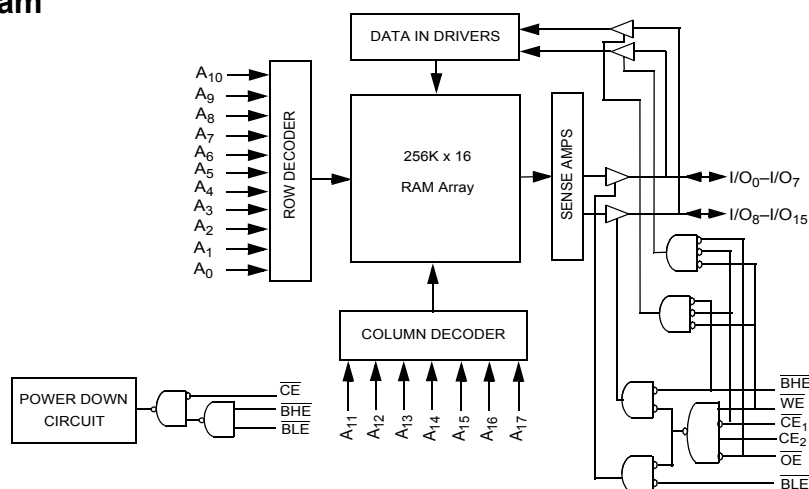

Contents

| | | | |
|---|-----------|--|-----------|
| Product Portfolio | 3 | Ordering Information | 12 |
| Pin Configuration | 3 | Ordering Code Definitions | 12 |
| Maximum Ratings | 4 | Package Diagram | 13 |
| Operating Range | 4 | Acronyms | 14 |
| Electrical Characteristics | 4 | Document Conventions | 14 |
| Capacitance | 5 | Units of Measure | 14 |
| Thermal Resistance | 5 | Document History Page | 15 |
| AC Test Loads and Waveforms | 5 | Sales, Solutions, and Legal Information | 16 |
| Data Retention Characteristics | 6 | Worldwide Sales and Design Support | 16 |
| Data Retention Waveform | 6 | Products | 16 |
| Switching Characteristics | 7 | PSoC [®] Solutions | 16 |
| Switching Waveforms | 8 | Cypress Developer Community | 16 |
| Truth Table | 11 | Technical Support | 16 |

Product Portfolio

| Product | Range | V _{CC} Range (V) | | | Speed (ns) | Power Dissipation | | | | | |
|---------------|------------|---------------------------|-----|----------------------|------------|--------------------------------|--------------------|-----|----|-------------------------------|---|
| | | | | | | Operating I _{CC} (mA) | | | | Standby I _{SB2} (μA) | |
| | | f = 1 MHz | | f = f _{max} | | | | | | | |
| | | Typ ^[1] | Max | Typ ^[1] | | Max | Typ ^[1] | Max | | | |
| CY621472E30LL | Industrial | 2.2 | 3.0 | 3.6 | 45 | 2 | 2.5 | 15 | 20 | 1 | 7 |

Pin Configuration

Figure 1. 44-pin TSOP II pinout

| | | | |
|------------------|----|----|-------------------|
| A ₄ | 1 | 44 | A ₅ |
| A ₃ | 2 | 43 | A ₆ |
| A ₂ | 3 | 42 | A ₇ |
| A ₁ | 4 | 41 | OE |
| A ₀ | 5 | 40 | BHE |
| CE ₁ | 6 | 39 | BLE |
| I/O ₀ | 7 | 38 | I/O ₁₅ |
| I/O ₁ | 8 | 37 | I/O ₁₄ |
| I/O ₂ | 9 | 36 | I/O ₁₃ |
| I/O ₃ | 10 | 35 | I/O ₁₂ |
| V _{CC} | 11 | 34 | V _{SS} |
| V _{SS} | 12 | 33 | V _{CC} |
| I/O ₄ | 13 | 32 | I/O ₁₁ |
| I/O ₅ | 14 | 31 | I/O ₁₀ |
| I/O ₆ | 15 | 30 | I/O ₉ |
| I/O ₇ | 16 | 29 | I/O ₈ |
| WE | 17 | 28 | CE ₂ |
| A ₁₇ | 18 | 27 | A ₈ |
| A ₁₆ | 19 | 26 | A ₉ |
| A ₁₅ | 20 | 25 | A ₁₀ |
| A ₁₄ | 21 | 24 | A ₁₁ |
| A ₁₃ | 22 | 23 | A ₁₂ |

Note

1. Typical values are included for reference only and are not guaranteed or tested. Typical values are measured at V_{CC} = V_{CC(typ)}, T_A = 25 °C.

Maximum Ratings

Exceeding the maximum ratings may impair the useful life of the device. User guidelines are not tested.

| | |
|---|---|
| Storage temperature | -65 °C to +150 °C |
| Ambient temperature with power applied | -55 °C to +125 °C |
| Supply voltage to ground potential | -0.3 V to +3.9 V ($V_{CCmax} + 0.3$ V) |
| DC Voltage Applied to Outputs in High Z State ^[2, 3] | -0.3 V to 3.9 V ($V_{CCmax} + 0.3$ V) |

| | |
|---|--|
| DC input voltage ^[2, 3] | -0.3 V to 3.9 V ($V_{CCmax} + 0.3$ V) |
| Output current into outputs (LOW) | 20 mA |
| Static discharge voltage (MIL-STD-883, Method 3015) | > 2001 V |
| Latch up current..... | > 200 mA |

Operating Range

| Device | Range | Ambient Temperature | V_{CC} ^[4] |
|---------------|------------|---------------------|-------------------------|
| CY621472E30LL | Industrial | -40 °C to +85 °C | 2.2 V to 3.6 V |

Electrical Characteristics

Over the Operating Range

| Parameter | Description | Test Conditions | 45 ns | | | Unit |
|--------------------------|---|--|-------|--------------------|----------------|---------|
| | | | Min | Typ ^[5] | Max | |
| V_{OH} | Output HIGH voltage | $I_{OH} = -0.1$ mA | 2.0 | - | - | V |
| | | $I_{OH} = -1.0$ mA, $V_{CC} \geq 2.70$ V | 2.4 | - | - | V |
| V_{OL} | Output LOW voltage | $I_{OL} = 0.1$ mA | - | - | 0.4 | V |
| | | $I_{OL} = 2.1$ mA, $V_{CC} = 2.70$ V | - | - | 0.4 | V |
| V_{IH} | Input HIGH voltage | $V_{CC} = 2.2$ V to 2.7 V | 1.8 | - | $V_{CC} + 0.3$ | V |
| | | $V_{CC} = 2.7$ V to 3.6 V | 2.2 | - | $V_{CC} + 0.3$ | V |
| V_{IL} | Input LOW voltage | $V_{CC} = 2.2$ V to 2.7 V | -0.3 | - | 0.6 | V |
| | | $V_{CC} = 2.7$ V to 3.6 V | -0.3 | - | 0.8 | V |
| I_{IX} | Input leakage current | $GND \leq V_I \leq V_{CC}$ | -1 | - | +1 | μ A |
| I_{OZ} | Output leakage current | $GND \leq V_O \leq V_{CC}$, Output Disabled | -1 | - | +1 | μ A |
| I_{CC} | V_{CC} operating supply current | $f = f_{max} = 1/t_{RC}$ | - | 15 | 20 | mA |
| | | $f = 1$ MHz | - | 2 | 2.5 | |
| I_{SB1} ^[6] | Automatic CE power-down current – CMOS inputs | $\overline{CE}_1 \geq V_{CC} - 0.2$ V, $CE_2 \leq 0.2$ V, $V_{IN} \geq V_{CC} - 0.2$ V, $V_{IN} \leq 0.2$ V, $f = f_{max}$ (address and data only), $f = 0$ (\overline{OE} , \overline{BHE} , \overline{BLE} and \overline{WE}), $V_{CC} = 3.60$ V | - | 1 | 7 | μ A |
| I_{SB2} ^[6] | Automatic CE Power down current – CMOS inputs | $\overline{CE}_1 \geq V_{CC} - 0.2$ V or $CE_2 \leq 0.2$ V or $(\overline{BHE} \text{ and } \overline{BLE}) \geq V_{CC} - 0.2$ V, $V_{IN} \geq V_{CC} - 0.2$ V or $V_{IN} \leq 0.2$ V, $f = 0$, $V_{CC} = 3.60$ V | - | 1 | 7 | μ A |

Notes

- $V_{IL(min)}$ = -2.0 V for pulse durations less than 20 ns.
- $V_{IH(max)}$ = $V_{CC} + 0.75$ V for pulse durations less than 20 ns.
- Full device AC operation assumes a minimum of 100 μ s ramp time from 0 to $V_{CC(min)}$ and 200 μ s wait time after V_{CC} stabilization.
- Typical values are included for reference only and are not guaranteed or tested. Typical values are measured at $V_{CC} = V_{CC(typ)}$, $T_A = 25$ °C.
- Chip enables (\overline{CE}_1 and CE_2) need to be tied to CMOS levels to meet the $I_{SB1} / I_{SB2} / I_{CCDR}$ spec. Other inputs can be left floating.

Capacitance


| Parameter ^[7] | Description | Test Conditions | Max | Unit |
|--------------------------|--------------------|---|-----|------|
| C _{IN} | Input capacitance | T _A = 25 °C, f = 1 MHz, V _{CC} = V _{CC(typ)} | 10 | pF |
| C _{OUT} | Output capacitance | | 10 | pF |

Thermal Resistance

| Parameter ^[7] | Description | Test Conditions | 44-pin TSOP II Package | Unit |
|--------------------------|--|--|------------------------|------|
| Θ _{JA} | Thermal resistance (junction to ambient) | Still Air, soldered on a 3 × 4.5 inch, two-layer printed circuit board | 77 | °C/W |
| Θ _{JC} | Thermal resistance (junction to case) | | 13 | °C/W |

AC Test Loads and Waveforms

Figure 2. AC Test Loads and Waveforms

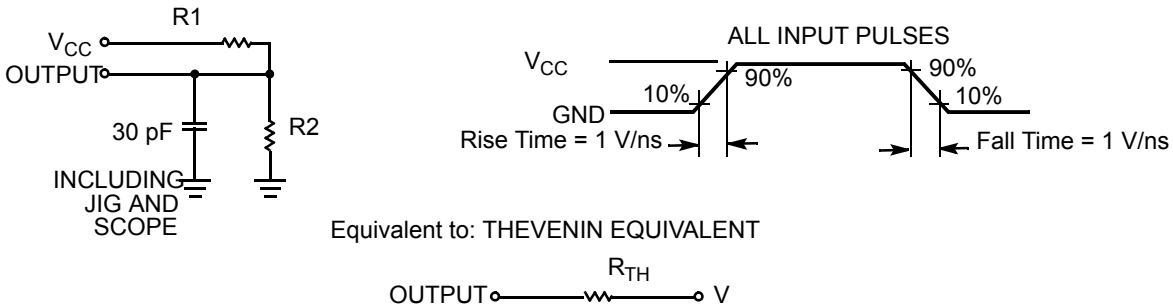

| Parameters | 2.50 V | 3.0 V | Unit |
|-----------------|--------|-------|------|
| R1 | 16667 | 1103 | Ω |
| R2 | 15385 | 1554 | Ω |
| R _{TH} | 8000 | 645 | Ω |
| V _{TH} | 1.20 | 1.75 | V |

Note


7. Tested initially and after any design or process changes that may affect these parameters.

Data Retention Characteristics

Over the Operating Range

| Parameter | Description | Conditions | Min | Typ ^[8] | Max | Unit |
|------------------|--------------------------------------|---|-----|--------------------|-----|---------------|
| V_{DR} | V_{CC} for data retention | | 1.5 | – | – | V |
| $I_{CCDR}^{[9]}$ | Data retention current | $V_{CC} = 1.5\text{ V}$, $\overline{CE}_1 \geq V_{CC} - 0.2\text{ V}$ or $CE_2 \leq 0.2\text{ V}$ or $(\overline{BHE}$ and $\overline{BLE}) \geq V_{CC} - 0.2\text{ V}$, $V_{IN} \geq V_{CC} - 0.2\text{ V}$ or $V_{IN} \leq 0.2\text{ V}$ | – | 0.8 | 7 | μA |
| $t_{CDR}^{[10]}$ | Chip deselect to data retention time | | 0 | – | – | ns |
| $t_R^{[11]}$ | Operation recovery time | | 45 | – | – | ns |

Data Retention Waveform

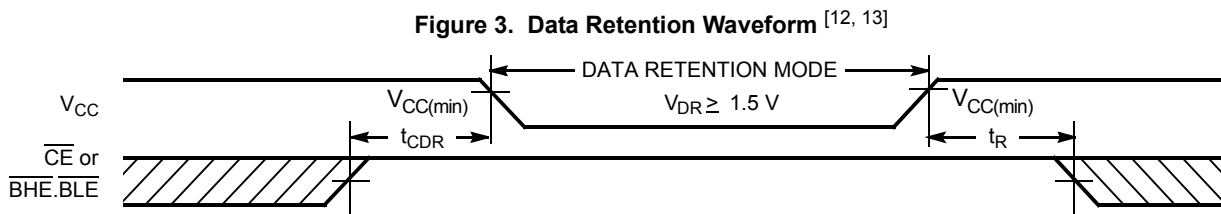

Notes

8. Typical values are included for reference only and are not guaranteed or tested. Typical values are measured at $V_{CC} = V_{CC(typ)}$, $T_A = 25\text{ }^\circ\text{C}$.

9. Chip enables (\overline{CE}_1 and CE_2) need to be tied to CMOS levels to meet the I_{SB1} / I_{SB2} / I_{CCDR} spec. Other inputs can be left floating.

10. Tested initially and after any design or process changes that may affect these parameters.

11. Full device operation requires linear V_{CC} ramp from V_{DR} to $V_{CC(min)} \geq 100\text{ }\mu\text{s}$ or stable at $V_{CC(min)} \geq 100\text{ }\mu\text{s}$.

12. \overline{CE} refers to the internal logical combination of \overline{CE}_1 and CE_2 such that when \overline{CE}_1 is LOW and CE_2 is HIGH, \overline{CE} is LOW. For all other cases \overline{CE} is HIGH.

13. $\overline{BHE.BLE}$ is the AND of both \overline{BHE} and \overline{BLE} . Deselect the chip by either disabling the chip enable signals or by disabling both \overline{BHE} and \overline{BLE} .

Switching Characteristics

Over the Operating Range

| Parameter ^[14] | Description | 45 ns | | Unit |
|--|--|-------|-----|------|
| | | Min | Max | |
| Read Cycle | | | | |
| t_{RC} | Read cycle time | 45 | – | ns |
| t_{AA} | Address to data valid | – | 45 | ns |
| t_{OHA} | Data hold from address change | 10 | – | ns |
| t_{ACE} | \overline{CE}_1 LOW/ CE_2 HIGH to data valid | – | 45 | ns |
| t_{DOE} | \overline{OE} LOW to data valid | – | 22 | ns |
| t_{LZOE} | \overline{OE} LOW to Low Z ^[15] | 5 | – | ns |
| t_{HZOE} | \overline{OE} HIGH to High Z ^[15, 16] | – | 18 | ns |
| t_{LZCE} | \overline{CE}_1 LOW/ CE_2 HIGH to Low Z ^[15] | 10 | – | ns |
| t_{HZCE} | \overline{CE}_1 HIGH/ CE_2 LOW to High Z ^[15, 16] | – | 18 | ns |
| t_{PU} | \overline{CE}_1 LOW/ CE_2 HIGH to Power-up | 0 | – | ns |
| t_{PD} | \overline{CE}_1 HIGH/ CE_2 LOW to Power-down | – | 45 | ns |
| t_{DBE} | $\overline{BLE}/\overline{BHE}$ LOW to data valid | – | 45 | ns |
| t_{LZBE} | $\overline{BLE}/\overline{BHE}$ LOW to Low Z ^[15, 17] | 5 | – | ns |
| t_{HZBE} | $\overline{BLE}/\overline{BHE}$ HIGH to High Z ^[15, 16] | – | 18 | ns |
| Write Cycle ^[18, 19] | | | | |
| t_{WC} | Write cycle time | 45 | – | ns |
| t_{SCE} | \overline{CE}_1 LOW/ CE_2 HIGH to Write End | 35 | – | ns |
| t_{AW} | Address setup to write end | 35 | – | ns |
| t_{HA} | Address hold from write end | 0 | – | ns |
| t_{SA} | Address setup to write start | 0 | – | ns |
| t_{PWE} | \overline{WE} pulse width | 35 | – | ns |
| t_{BW} | $\overline{BLE}/\overline{BHE}$ LOW to write end | 35 | – | ns |
| t_{SD} | Data setup to write end | 25 | – | ns |
| t_{HD} | Data hold from write end | 0 | – | ns |
| t_{HZWE} | \overline{WE} LOW to High Z ^[15, 16] | – | 18 | ns |
| t_{LZWE} | \overline{WE} HIGH to Low Z ^[15] | 10 | – | ns |

Notes

14. Test conditions for all parameters other than tri-state parameters assume signal transition time of 3 ns (1 V/ns) or less, timing reference levels of $V_{CC(typ)}/2$, input pulse levels of 0 to $V_{CC(typ)}$, and output loading of the specified I_{OL}/I_{OH} as shown in the [Figure 2 on page 5](#).
15. At any temperature and voltage condition, t_{HZCE} is less than t_{LZCE} , t_{HZBE} is less than t_{LZBE} , t_{HZOE} is less than t_{LZOE} , and t_{HZWE} is less than t_{LZWE} for any device.
16. t_{HZOE} , t_{HZCE} , t_{HZBE} , and t_{HZWE} transitions are measured when the outputs enter a high impedance state.
17. If both byte enables are together, this value is 10 ns.
18. The internal write time of the memory is defined by the overlap of \overline{WE} , $\overline{CE} = V_{IL}$, \overline{BHE} , \overline{BLE} , or both = V_{IL} . All signals must be active to initiate a write and any of these signals can terminate a write by going inactive. The data input setup and hold timing must be referenced to the edge of the signal that terminates the write.
19. The minimum write cycle pulse width for WRITE Cycle 4 (\overline{WE} controlled, \overline{OE} LOW) should be equal to the sum of t_{HZWE} and t_{SD} .

Switching Waveforms (continued)

Figure 6. Write Cycle No. 1 (\overline{WE} Controlled) [24, 25, 26, 27]


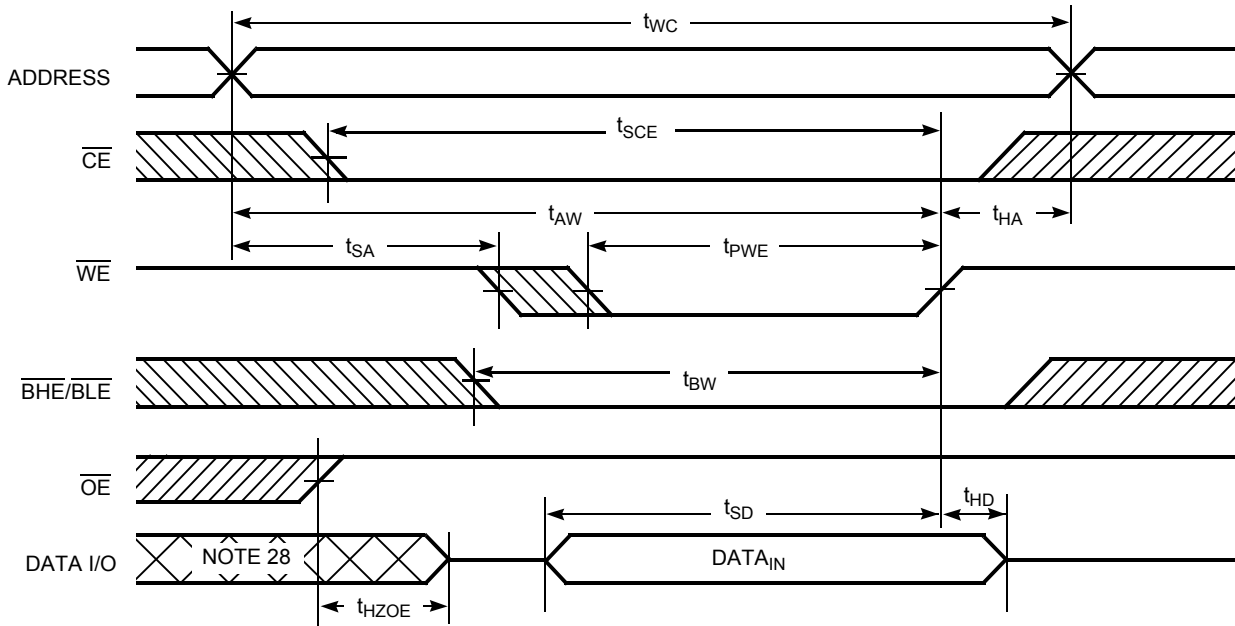


Figure 7. Write Cycle No. 2 (\overline{CE} Controlled) [24, 25, 26, 27]

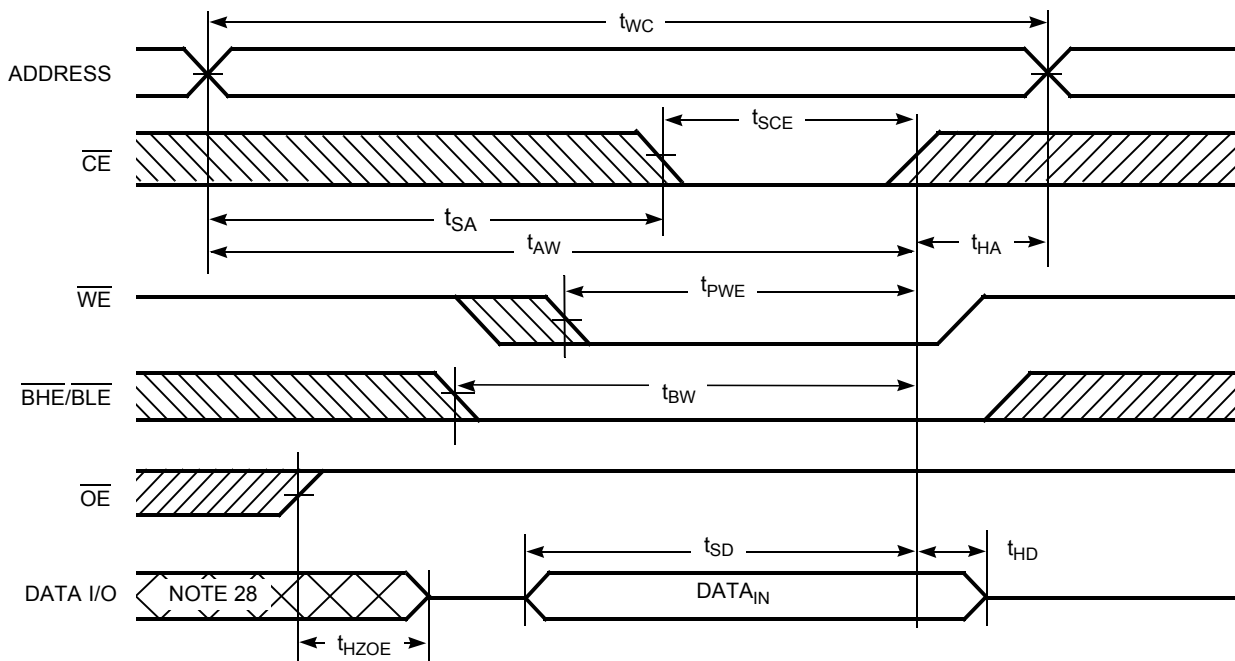

Notes

- 24. \overline{CE} refers to the internal logical combination of \overline{CE}_1 and CE_2 such that when \overline{CE}_1 is LOW and CE_2 is HIGH, \overline{CE} is LOW. For all other cases \overline{CE} is HIGH.
- 25. The internal write time of the memory is defined by the overlap of \overline{WE} , $\overline{CE} = V_{IL}$, \overline{BHE} , \overline{BLE} , or both = V_{IL} . All signals must be active to initiate a write and any of these signals can terminate a write by going inactive. The data input setup and hold timing must be referenced to the edge of the signal that terminates the write.
- 26. Data I/O is high impedance if $OE = V_{IH}$.
- 27. If \overline{CE} goes HIGH simultaneously with $\overline{WE} = V_{IH}$, the output remains in a high impedance state.
- 28. During this period, the I/Os are in output state. Do not apply input signals.

Switching Waveforms (continued)

Figure 8. Write Cycle No. 3 (\overline{WE} Controlled, \overline{OE} LOW) [29, 30, 31]


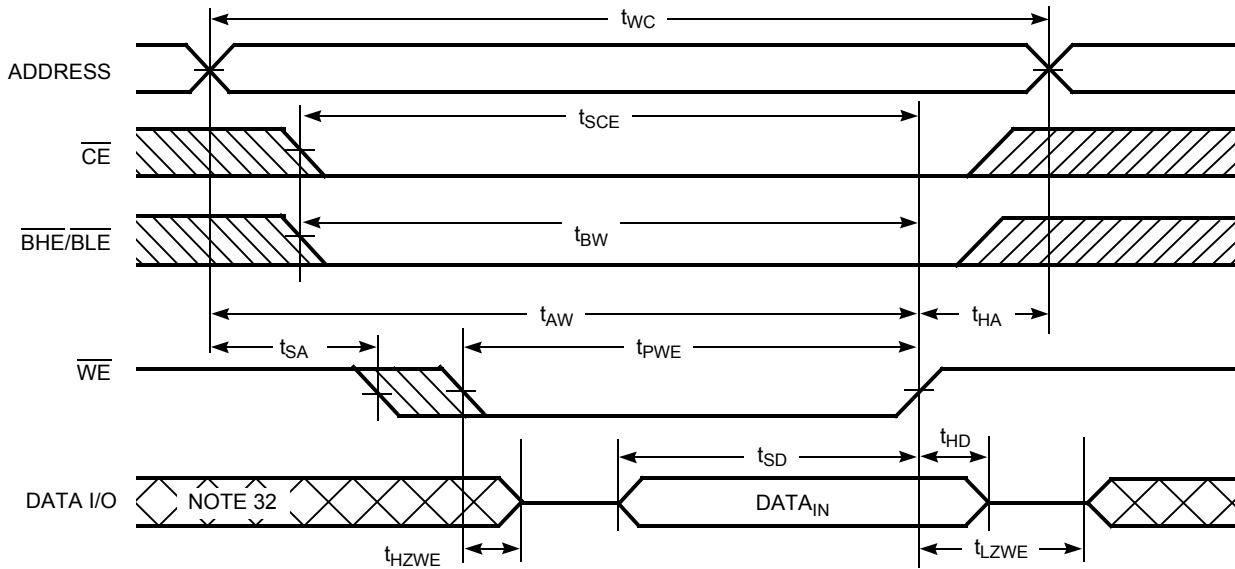


Figure 9. Write Cycle No. 4 ($\overline{BHE}/\overline{BLE}$ Controlled, \overline{OE} LOW) [29, 30]

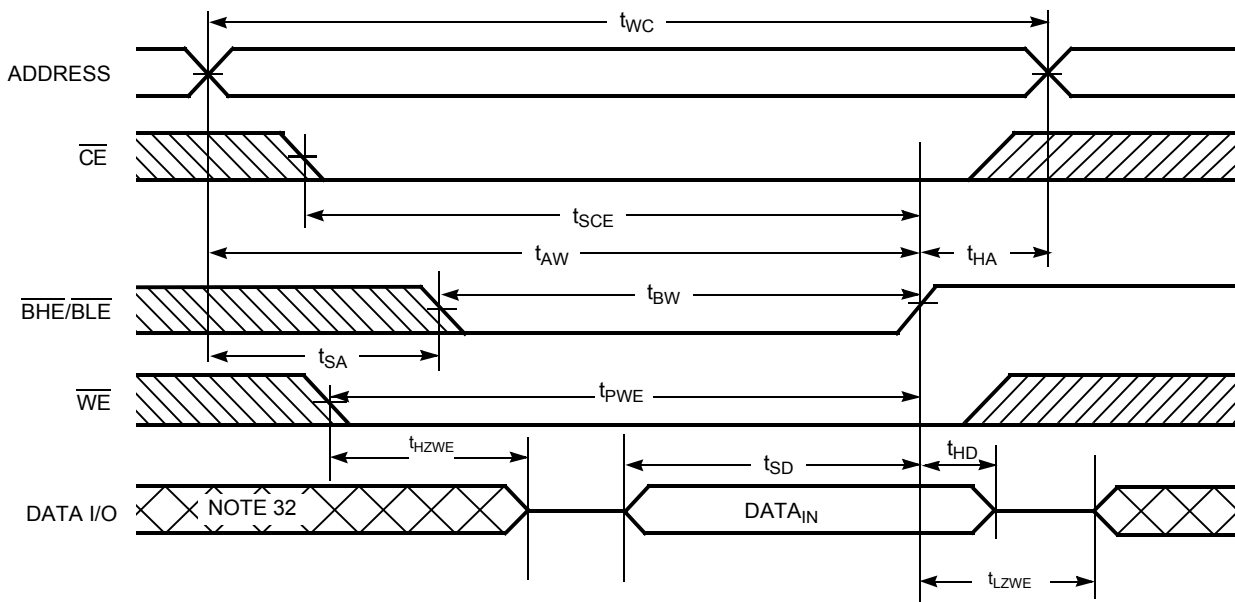

Notes

- 29. \overline{CE} refers to the internal logical combination of \overline{CE}_1 and CE_2 such that when \overline{CE}_1 is LOW and CE_2 is HIGH, \overline{CE} is LOW. For all other cases \overline{CE} is HIGH.
- 30. If \overline{CE} goes HIGH simultaneously with $WE = V_{IH}$, the output remains in a high impedance state.
- 31. The minimum write cycle pulse width should be equal to the sum of t_{HZWE} and t_{SD} .
- 32. During this period, the I/Os are in output state. Do not apply input signals.

Truth Table

| \overline{CE}_1 | CE_2 | \overline{WE} | \overline{OE} | \overline{BHE} | \overline{BLE} | I/Os | Mode | Power |
|-------------------|-------------------|-----------------|-----------------|------------------|------------------|--|---------------------|----------------------|
| H | X ^[33] | X | X | X | X | High Z | Deselect/Power-down | Standby (I_{SB}) |
| X ^[33] | L | X | X | X | X | High Z | Deselect/Power-down | Standby (I_{SB}) |
| X ^[33] | X ^[33] | X | X | H | H | High Z | Deselect/Power-down | Standby (I_{SB}) |
| L | H | H | L | L | L | Data out (I/O ₀ –I/O ₁₅) | Read | Active (I_{CC}) |
| L | H | H | L | H | L | Data out (I/O ₀ –I/O ₇); I/O ₈ –I/O ₁₅ in High Z | Read | Active (I_{CC}) |
| L | H | H | L | L | H | Data out (I/O ₈ –I/O ₁₅); I/O ₀ –I/O ₇ in High Z | Read | Active (I_{CC}) |
| L | H | H | H | L | L | High Z | Output disabled | Active (I_{CC}) |
| L | H | H | H | H | L | High Z | Output disabled | Active (I_{CC}) |
| L | H | H | H | L | H | High Z | Output disabled | Active (I_{CC}) |
| L | H | L | X | L | L | Data in (I/O ₀ –I/O ₁₅) | Write | Active (I_{CC}) |
| L | H | L | X | H | L | Data in (I/O ₀ –I/O ₇); I/O ₈ –I/O ₁₅ in High Z | Write | Active (I_{CC}) |
| L | H | L | X | L | H | Data in (I/O ₈ –I/O ₁₅); I/O ₀ –I/O ₇ in High Z | Write | Active (I_{CC}) |


Note

33. The 'X' (Don't care) state for the chip enables (\overline{CE}_1 and CE_2) in the truth table refer to the logic state (either HIGH or LOW). Intermediate voltage levels on these pins is not permitted.

Ordering Information


| Speed (ns) | Ordering Code | Package Diagram | Package Type | Operating Range |
|------------|----------------------|-----------------|--------------------------|-----------------|
| 45 | CY621472E30LL-45ZSXI | 51-85087 | 44-pin TSOP II (Pb-free) | Industrial |

Ordering Code Definitions

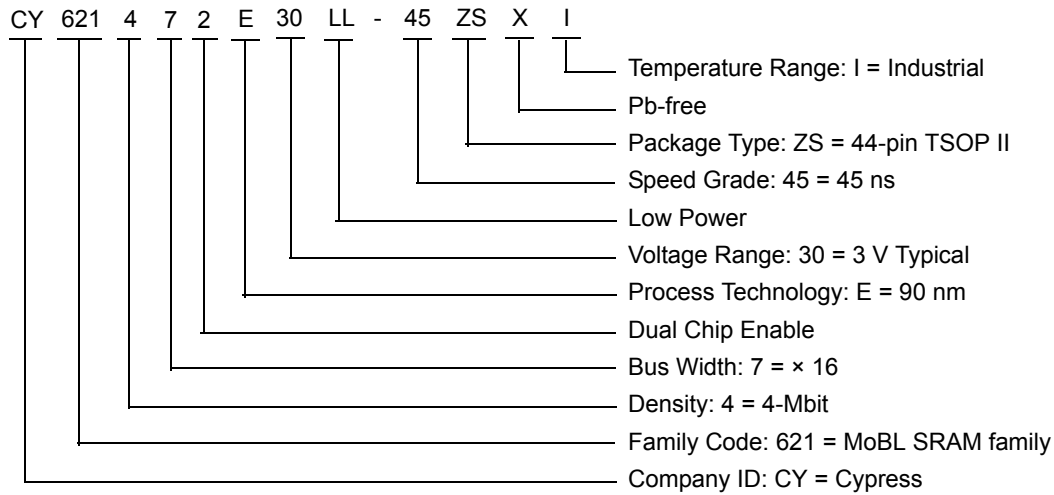

Package Diagram

Figure 10. 44-pin TSOP II Package Outline, 51-85087

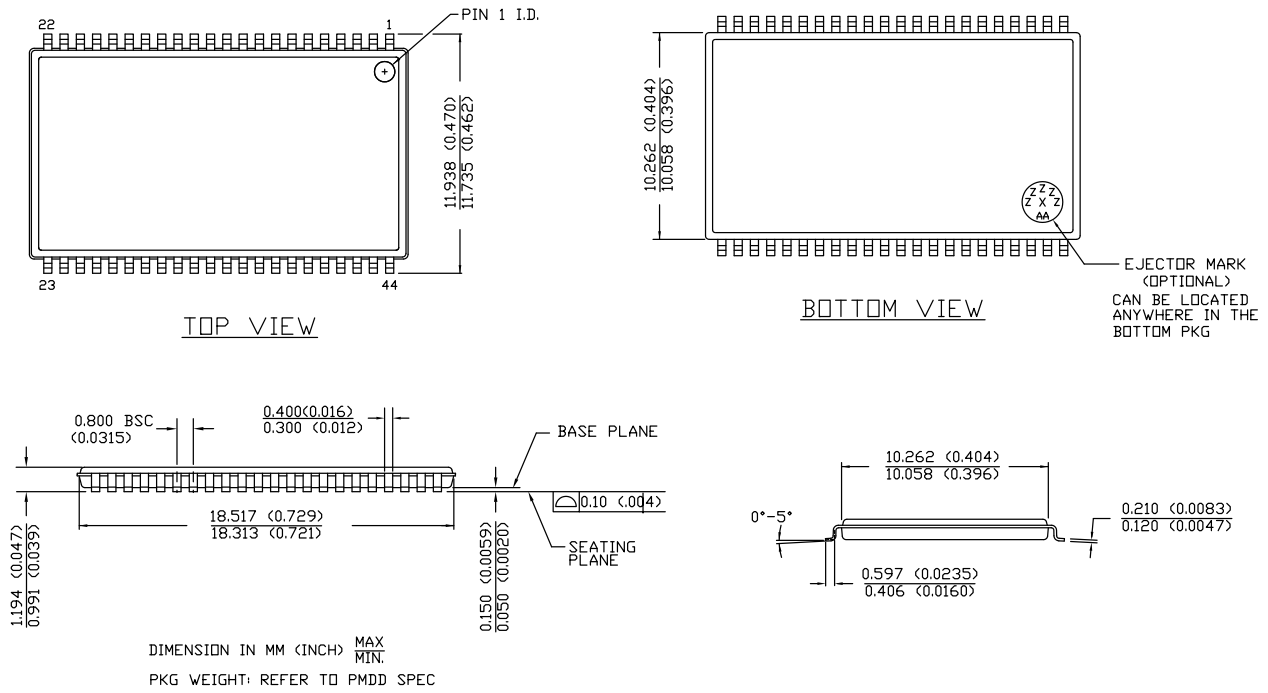

51-85087 *E

Acronyms

| Acronym | Description |
|-----------------|---|
| CMOS | Complementary Metal Oxide Semiconductor |
| I/O | Input/Output |
| \overline{OE} | Output Enable |
| SRAM | Static Random Access Memory |
| TSOP | Thin Small Outline Package |
| \overline{WE} | Write Enable |

Document Conventions

Units of Measure

| Symbol | Unit of Measure |
|---------------|-----------------|
| °C | degree Celsius |
| MHz | megahertz |
| μA | microampere |
| μs | microsecond |
| mA | milliampere |
| ns | nanosecond |
| Ω | ohm |
| % | percent |
| pF | picofarad |
| V | volt |
| W | watt |

Document History Page

| Document Title: CY621472E30 MoBL [®] , 4-Mbit (256 K × 16) Static RAM Document Number: 001-67798 | | | | |
|--|---------|-----------------|-----------------|---|
| Rev. | ECN No. | Orig. of Change | Submission Date | Description of Change |
| ** | 3184883 | RAME | 03/01/2011 | New data sheet. |
| *A | 3223503 | RAME | 04/15/2011 | Overline bar CE ₂ removed from the Truth table. Updated all notes as per template. |
| *B | 3261142 | RAME | 05/19/2011 | Updated Switching Characteristics (corrected the Min value of t _{LZBE} parameter). Added Ordering Information and Ordering Code Definitions . Added Acronyms and Units of Measure . |
| *C | 3365953 | AJU | 09/08/2011 | Changed datasheet status from Preliminary to Final. Updated 44-pin TSOP II package spec. |
| *D | 3414567 | TAVA | 10/20/2011 | Replaced CY62147EV30 with CY621472E30 through out the data sheet. |
| *E | 4331825 | NILE | 04/03/2014 | Updated Switching Characteristics : Added Note 19 and referred the same note in "Write Cycle". Updated Switching Waveforms : Added Note 31 and referred the same note in Figure 8 . Updated Package Diagram : spec 51-85087 – Changed revision from *D to *E. Updated in new template. Completing Sunset Review. |

Sales, Solutions, and Legal Information

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

Products

| | |
|--|--|
| Automotive | cypress.com/go/automotive |
| Clocks & Buffers | cypress.com/go/clocks |
| Interface | cypress.com/go/interface |
| Lighting & Power Control | cypress.com/go/powerpsoc cypress.com/go/plc |
| Memory | cypress.com/go/memory |
| PSoC | cypress.com/go/psoc |
| Touch Sensing | cypress.com/go/touch |
| USB Controllers | cypress.com/go/USB |
| Wireless/RF | cypress.com/go/wireless |

PSoC® Solutions

[psoc.cypress.com/solutions](#)
[PSoC 1](#) | [PSoC 3](#) | [PSoC 4](#) | [PSoC 5LP](#)

Cypress Developer Community

[Community](#) | [Forums](#) | [Blogs](#) | [Video](#) | [Training](#)

Technical Support

[cypress.com/go/support](#)

© Cypress Semiconductor Corporation, 2011-2014. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.