

14118 Stowe Drive, Suite B
 Poway, CA 92064
 TEL: (858) 621-2700 | FAX: (858) 486-1927
 URL: www.zcomm.com
 EMAIL: applications@zcomm.com


Voltage-Controlled Oscillator Surface Mount Module

Applications

- High Speed Digital Clocks
- Microwave Radios
-

Application Notes

- AN-101: Mounting and Grounding
- AN-102: Output Loading
- AN-107: Manual Soldering

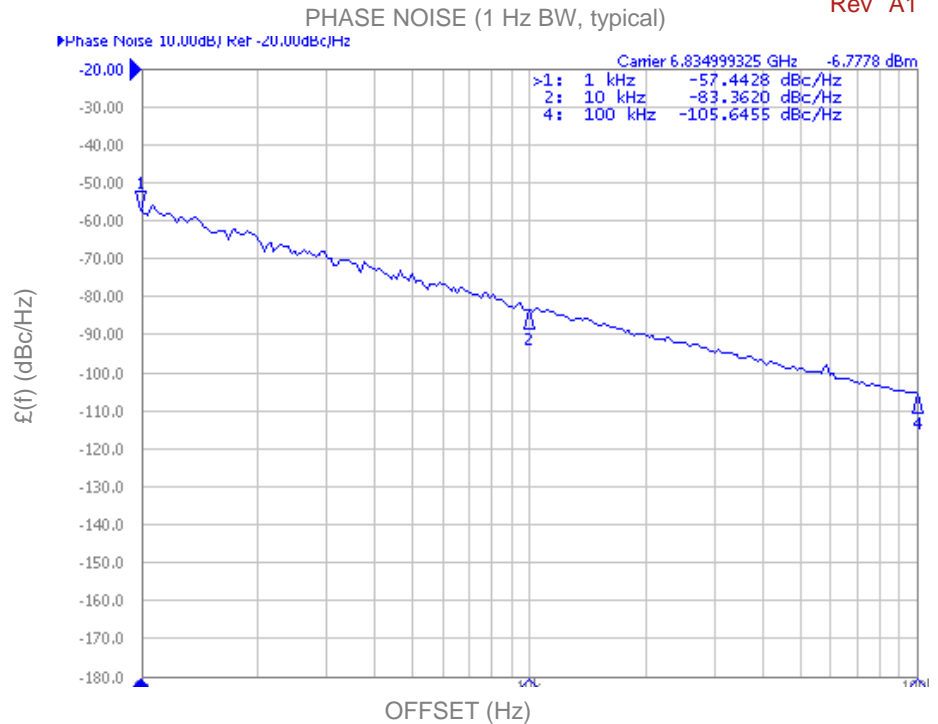


Performance Specifications	Min	Typ	Max	Units
Oscillation Frequency Range	6834		6835	MHz
Phase Noise @ 10 kHz offset (1 Hz BW)		-80		dBc/Hz
Harmonic Suppression (2nd)		-20	-15	dBc
Tuning Voltage	0		2.8	Vdc
Tuning Sensitivity (avg.)		140		MHz/V
Power Output	-4	-5	3	dBm
Load Impedance		50		Ω
Input Capacitance			20	pF
Pushing			10	MHz/V
Pulling (12 dB Return Loss, Any Phase)			25	MHz
Operating Temperature Range	0		70	$^{\circ}\text{C}$
Package Style	MINI-16HL-SM			


Power Supply Requirements	Min	Typ	Max	Units
Supply Voltage (Vcc, nom.)		4.5		Vdc
Supply Current (Icc)		24	30	mA

Additional Notes


Tuning Curve, typ.

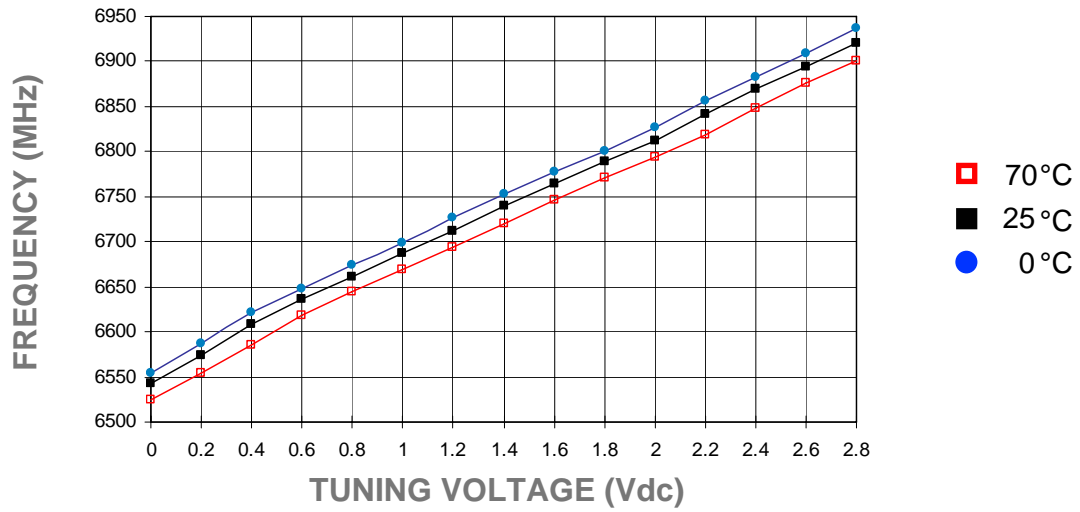


Power Curve, typ.

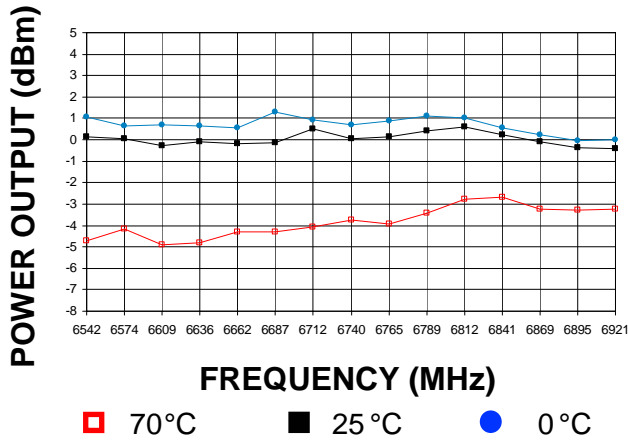

Footprint

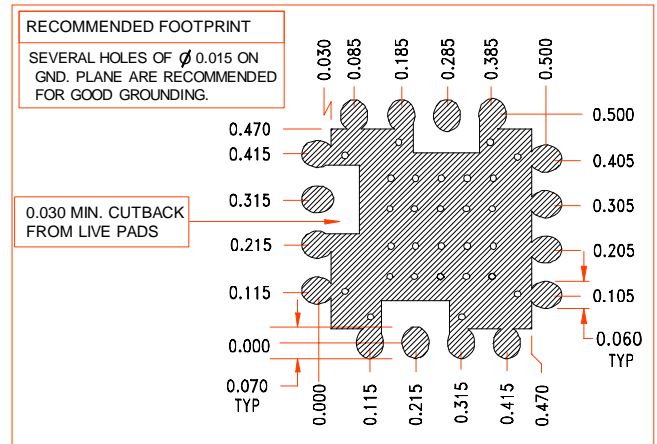

Physical Dimensions

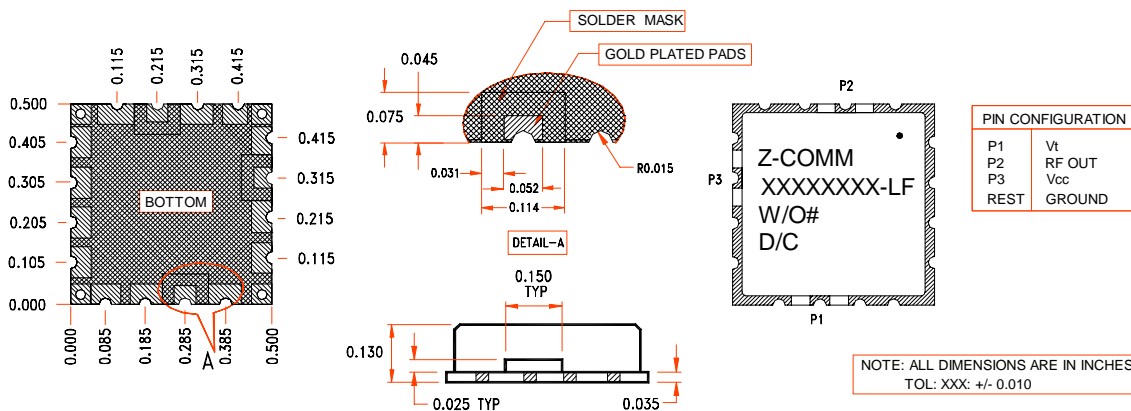

LFSuffix = RoHS Compliant. All specifications are subject to change without notice.