



106KFM450MGJD

RADIAL LEAD HIGH FREQUENCY/ LOW IMPEDANCE

Parts are RoHS compliant

Date code when parts became RoHS: 1424

APPLICATIONS: Switching regulators and power supplies, input filters

ELECTRICAL SPECIFICATIONS

Capacitance: 10 uF

Dissipation Factor: 0.2 Max at 120 Hz and 20°C

Temperature Range: -40°C to +105°C

ESR: 33.1573 Ohms Max at 20°C and 120 Hz

Impedance: 6.2Ohms100 kHz20°C

--

Tolerance: -20 %, +20 %

WVDC: 450 Volts DC

SVDC: 500 Volts DC

Ripple Current: 305 mA at 100 kHz and 105°C

Impedance Ratios:-40°C/20°C 9 and - - -

Leakage Current: .02CV+10uA

100 uA after 2 Minutes

Load Life: 10000 hours at 105°C with 100 % of rated voltage and with 100 % of rated ripple current

Capacitance Change: ≤20% of initial measured value

Dissipation Factor: ≤200% of maximum specified value

Leakage Current: ≤100% of maximum specified value

Frequency Multipliers:

50 HZ	120 HZ	400 HZ	1 KHZ	10 KHZ	100 KHZ
0.4	0.5	0.5	0.8	0.9	1

Temperature Multipliers:

45°C	60°C	70°C	65°C	75°C	85°C	105°C	125°C
2.23	2.17	2	2.1	1.75	1.75	1	0

PHYSICAL DIMENSIONS

Diameter (D): 10 mm + 0.5 mm

Length (L): 25 mm + 2 mm


Lead Spacing (S): 5 mm +/- 0.5 mm

Coating: GreenPET sleeving

Lead Wire Diameter (d): 0.6 mm +/- 0.05 mm

Lead Length: 15 mm +/- MIN mm

Lead Finish: Matte Tin

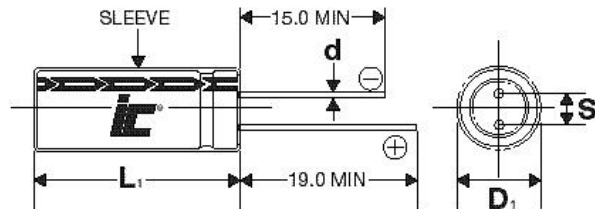

3757 W. Touhy Ave. Lincolnwood, IL 60712 (847) 675-1760 FAX (847) 673-2850
 Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, www.illcap.com.hk
 © Copyright 2017 Illinois Capacitor. A division of Cornell Dubilier. All Rights Reserved