


NEC U321HG

Order Code: NP-U321HG-B

NEC Professional Ultra-Short-Throw Projector

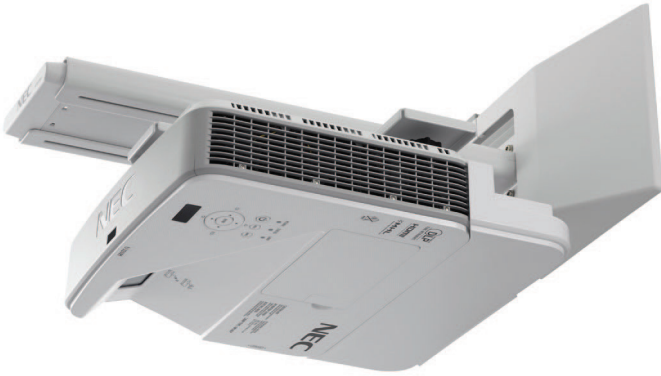

With 1080p resolution and 10,000:1 contrast, the U321HG delivers perfect image quality for very detailed content as well as high quality movies including 3D content from Blu-Ray players, thanks to HDMI 3D support. This ultra-short throw projector releases space within small to medium sized classrooms and meeting rooms, projecting onto screen sizes between 85-100" without creating shadow or glare. Demanding applications in higher education such as design and engineering will appreciate the 1080p resolution for the high level of detail achieved. Interactivity can be added retrospectively to this model with a multi-pen and/or multi-touch option.

The U321HG is particularly suited for classrooms and small to medium sized meeting rooms.

BENEFITS

Great picture quality - thanks to 1080p resolution and 10000:1 contrast.

Almost no shadow and glare - thanks to ultra-short throwing distance.

Optional Multi-pen and Touch Interactivity - with auto-calibration on any kind of surface.

Future proof connectivity - due to numerous analog and digital connection terminals including MHL support, network capability as well as optional wireless connectivity.

Wall-mount included - for quick and easy installation, compatible with height adjustable systems.

3D ready - for playback of engaging 3D applications and movies.



IMAGE	Projection Technology	1-chip DLP™ Technology
	Native Resolution	1920 x 1080 (FULL-HD)
	Aspect Ratio	16:9
	Contrast Ratio ¹	10000:1
	Brightness ¹	3200 ANSI Lumen (approx. 85% in Eco Mode)
	Lamp	260 W AC (220 W AC Eco Mode)
	Lamp Life [hrs]	3000 (4000 Eco Mode)
	Lens	F= 2.4, f= 3.72 mm
	Lens Offset [%]	65
	Projection Angle [°]	57
	Projection Factor	0.25 : 1
	Projection Distance [m]	0.195 – 0.306
	Screen Size (diagonal) [cm] / [inch]	Maximum: 254 / 100"; Minimum: 215 / 85"
	Zoom	Digital Zoom
	Focus Adjustment	Manual
	Supported Resolutions	1920 x 1080 (HDTV 1080i/60; HDTV 1080i/50); 1680 x 1050 (WSXGA+); 1600 x 1200 (UXGA); 1600 x 900 (WXGA++); 1440 x 900 (WXGA+); 1400 x 1050 (SXGA+); 1366 x 768 (WXGA); 1360 x 768 (WXGA); 1280 x 1024 (SXGA); 1280 x 1024 (MAC 23"); 1280 x 960 (SXGA); 1280 x 800 (WXGA); 1280 x 768 (WXGA); 1280 x 720 (HDTV 720p); 1152 x 870 (MAC 21"); 1152 x 864 (XGA); 1024 x 768 (XGA); 832 x 624 (MAC 16"); 800 x 600 (SVGA); 720 x 576 SDTV 480p/480i; 720 x 480 SDTV 576p/576i; 640 x 480 (VGA/MAC 13")
	Frequency	Horizontal: 15–100 kHz (RGB: 24 kHz– 100 kHz); Vertical: 50 – 120 Hz
CONNECTIVITY	RGB (analog)	Input: 1 x Mini D-sub 15-pin, compatible to component (YPbPr) Output: 1 x Mini D-sub 15 pin
	HDMI™	Input: 1 x HDMI™ (Deep Color, Lip sync); 1 x HDMI™ with MHL support
	Video	Input: 1 x RCA
	Audio	Input: 1 x 3.5 mm Stereo Mini Jack; 1 x RCA Stereo Output: 1 x 3.5 mm Stereo Mini Jack (variable)
	Control	Input: 1 x D-Sub 9 pin (RS-232) (male)
	LAN	1 x RJ45
	USB	1 x Mini USB; 1 x Type A (USB 2.0 high speed)
	Video Signals	NTSC; NTSC 3.58; NTSC 4.43; PAL; PAL-M; PAL-N; PAL60; SECAM
REMOTE CONTROL	Remote Control	Aspect Ratio; Audio Control; Auto Adjust; AV Mute; Digital Zoom; Direct Source Select; Freeze; Help Eco Mode; Help-function; ID set; Picture Adjust; Presentation and Mouse Control
ELECTRICAL	Power Supply	100-240 V AC; 50 - 60 Hz
	Power Consumption [W]	312 (Normal) / 264 (Eco) / 2.2 (Network Stand-by) / 0.3 (Stand-by)
MECHANICAL	Dimensions (W x H x D) [mm]	383 x 85 x 308 (without lens and feet)
	Weight [kg]	4.7
	Fan Noise [dB (A)]	29 / 34 (Eco / Normal)
ENVIRONMENTAL CONDITIONS	Operating Temperature [°C]	5 to 40
	Operating Humidity [%]	20 to 80 non-condensing
	Storage Temperature [°C]	-20 to 60
	Storage Humidity [%]	20 to 90 non-condensing
ERGONOMICS	Safety and Ergonomics	CE; Gost-R; RoHS; TÜV GS
	Speakers [W]	1 x 8 (mono)
GREEN FEATURES	Ecological Materials	100% recyclable packaging; Downloadable manuals; ECO packaging
	Ecological Standards	ErP compliant; RoHS compliant
WARRANTY	Projectors	5 years conditional warranty
	Light Source	6 months, max. 2000 hrs
SHIPPING CONTENT	Shipping Contents	Attachment Plate; IR Remote Control (RD469E); Mini D-SUB Signal Cable (1.8 m); Power Cord; Quick Setup Guide; Security Sticker; Users Manual; Wall-mount kit NP04WK
OPTIONAL ACCESSORIES	Optional Accessories	TBA

¹ Compliance with ISO21118-2005

For more information, visit au.nec.com, email contactus@nec.com.au or call 131 632

Australia
NEC Australia Pty Ltd
au.nec.com

Corporate Headquarters (Japan)
NEC Corporation
www.nec.com

North America (USA)
NEC Corporation of America
www.necam.com

Asia Pacific (AP)
NEC Asia Pacific
sg.nec.com

Europe (EMEA)
NEC Enterprise Solutions
www.nec-enterprise.com

Product | v.22.12.2015

NEC Australia Pty Ltd reserves the right to change product specifications, functions, or features, at any time, without notice. Please refer to your local NEC representatives for further details. Although all efforts have been made to ensure that the contents are correct, NEC shall not be liable for any direct, indirect, consequential or incidental damages resulting from the use of the equipment, manual or any related materials. The information contained herein is the property of NEC Australia Pty Ltd and shall not be reproduced without prior written approval from NEC Australia Pty Ltd.

Copyright © 2015 NEC Australia Pty Ltd. All rights reserved. NEC, NEC logo, and UNIVERGE are trademarks or registered trademarks of NEC Corporation that may be registered in Japan and other jurisdictions. All other trademarks are the property of their respective owners. All rights reserved. Printed in Australia. Note: This disclaimer also applies to all related documents previously published.

Empowered by Innovation

