

6

5

4

3






2

1

Rev	AWO #	Description	Date	Appr
-	10205	RELEASED	3/07/11	

APPROVED: _____

DATE: _____ TITLE: _____

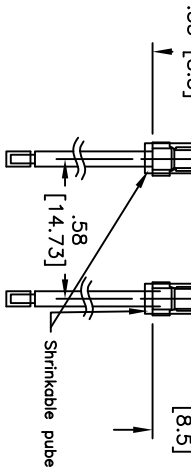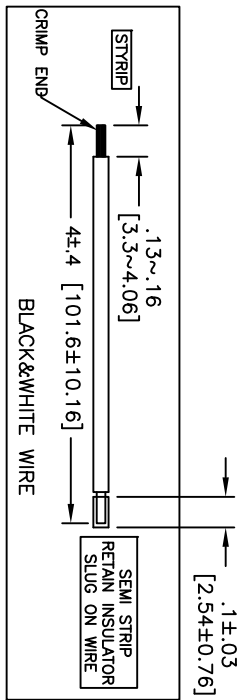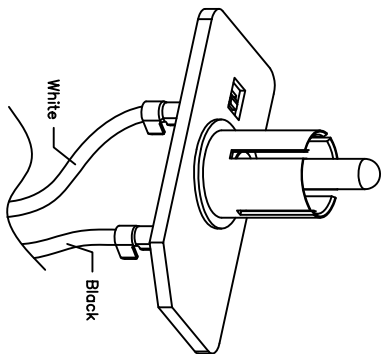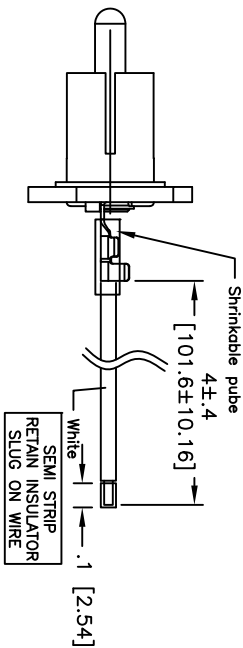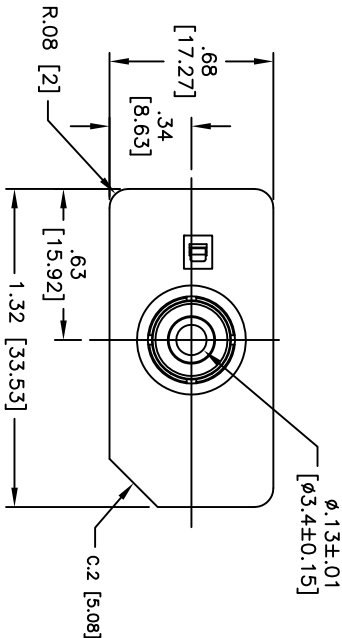

SPECIFICATIONS:

Material:

Insulator: PA9T, rated UL 94V-0

Insulator color: Black

Center Pin: Brass, Nickel plated

Contacts: Brass

Wire: 22AWG (PTFE 600V), color Black&White

Plating:

Tin over Copper underplate

Electrical:

Operating voltage: 30 VDC max.

Current rating: 1 Amps max

Contact resistance: 30 mohms max.

Insulation resistance: 100 Mohms min. @ DC 250V

Dielectric withstanding voltage: 500 VAC for 1 minute

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

RCA PLUG, WITH WIRE

TITLE

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES
.X ± .10
.XX ± .020
.XXX ± .015
APPROVALS
DRAWN DY 3/07/11
CHECKED
APPROVED

DATE

DATE

DATE

SIZE

SIZE

SIZE

PART NO.

PART NO.

PART NO.

REV.

REV.

REV.

SCALE: NTS

SHEET 1 OF 1