REVISION D

RECOMMENDED PCB LAYOUT FOR BTH-XXX-XX-X-D-XX

6/7/2015 ECN-250559

NOTES:

1. ALL DIMENSIONS ARE SYMMETRIC ABOUT THE CENTERLINE.

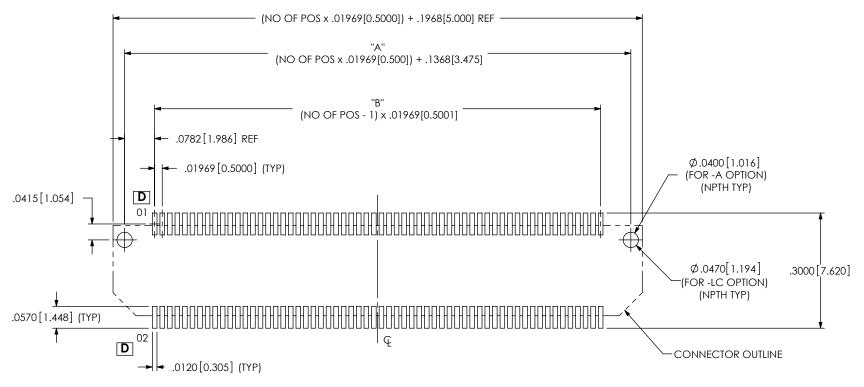


FIG 1 BTH-060-XX-X-D-XX SHOWN

TABLE 1		
NO OF POSITIONS	"A"	"B"
-30	.7275 [18.479]	.5710 [14.504]
-60	1.3182 [33.482]	1.1617 [29.507]
-90	1.9089 [48.486]	1.7524 [44.511]
-120	2.4996 [63.490]	2.3431 [59.515]
-150	3.0903 [78.494]	2.9338 [74.519]
-180	3.6810 [93.497]	3.5245 [89.523]

F:\DWG\MISC\Mktg\Footprnt\BTH-XXX-XX-X-D-XX-FOOTPRINT.SLDDRW

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

SHEET 1 OF 2

NOTES: 1. RECOMMENDED STENCIL THICKNESS TO BE: .006[0.15].





<u>FIG 2</u> BTH-060-XX-X-D-XX SAME AS FIG 1 EXCEPT WHERE SHOWN

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

