


SPECIFICATION FOR APPROVAL

REF :

PAGE: 1

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO. ABC'S ITEM NO.	SS0804□□□□L□-□□□
---------------	--------------------------------	---------------------------------	------------------


CONFIGURATION & DIMENSIONS :

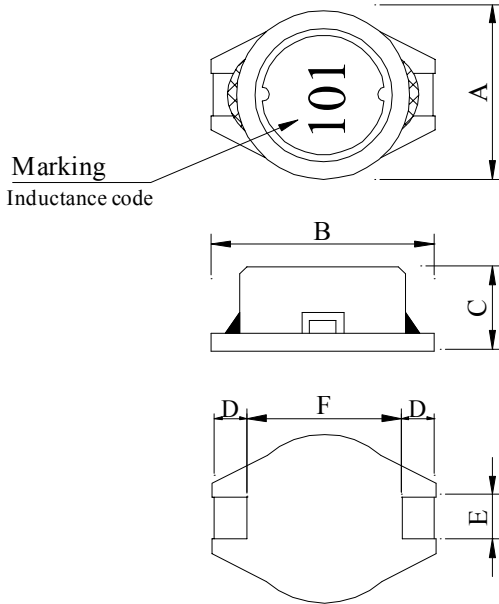

A	: 8.0±0.3	m/m
B	: 10.5±0.3	m/m
C	: 3.7±0.3	m/m
D	: 2.1±0.2	m/m
E	: 2.0±0.2	m/m
F	: 6.0±0.3	m/m
G	: 5.7 ref.	m/m
H	: 2.2 ref.	m/m
I	: 2.4 ref.	m/m


(PCB Pattern)

SCHEMATIC DIAGRAM :



MATERIALS :


- a . Core : Ferrite DR core
- b . Core : Ferrite RI core
- c . Wire : Enamelled copper wire (class F)
- d . Base : LCP E4008
- e . Terminal : Cu/Ni/Sn
- f . Adhesive : Epoxy resin
- g . Remark : Products comply with RoHS' requirements

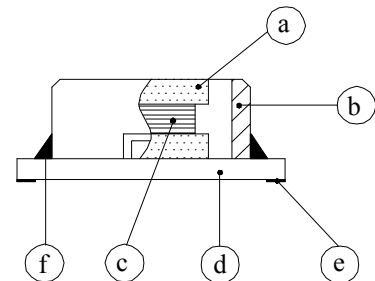

Peak Temp : 260 max.
 Max time above 230 : 50sec max.
 Max time above 200 : 70sec max.

GENERAL SPECIFICATION :

- a . Temp. rise : 40 max.
- b . Rated current : Base on temp. rise
& L / LOA=10% max.
- c . Storage temp. : -40 ----+125
- d . Operating temp. : -40 ----+105
- e . Resistance to solder heat : 260 .10 secs.

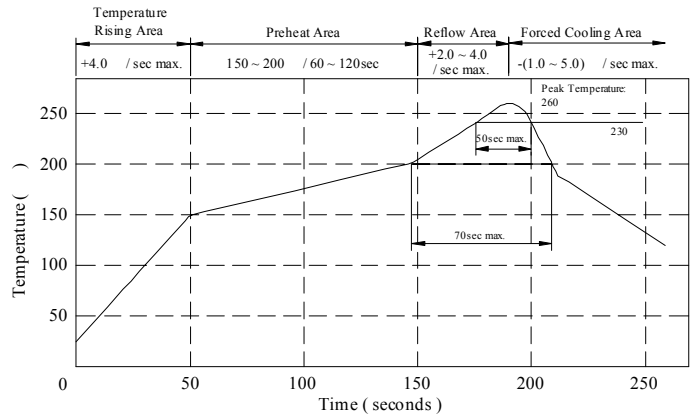

AE-001A

SPECIFICATION FOR APPROVAL

REF :

PAGE: 2

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0804□□□□L□-□□□
		ABC'S ITEM NO.	

. ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (μ H)	Q ref.	Test Freq. (Hz)		SRF (MHz) nom.	RDC (Ω) max.	IDC (A) max.
			L	Q			
SS08045R0ML□-□□□	5.0 \pm 20%	20	1K	7.960M	45.0	0.080	1.70
SS08047R5ML□-□□□	7.5 \pm 20%	20	1K	7.960M	40.0	0.100	1.40
SS0804100ML□-□□□	10.0 \pm 20%	38	1K	2.520M	32.0	0.120	1.20
SS0804120ML□-□□□	12.0 \pm 20%	38	1K	2.520M	28.0	0.150	1.10
SS0804150ML□-□□□	15.0 \pm 20%	38	1K	2.520M	25.0	0.170	1.00
SS0804180YL□-□□□	18.0 \pm 15%	35	1K	2.520M	23.0	0.190	0.90
SS0804220YL□-□□□	22.0 \pm 15%	30	1K	2.520M	22.0	0.250	0.80
SS0804270YL□-□□□	27.0 \pm 15%	28	1K	2.520M	18.0	0.270	0.70
SS0804330YL□-□□□	33.0 \pm 15%	26	1K	2.520M	17.0	0.300	0.65
SS0804390YL□-□□□	39.0 \pm 15%	26	1K	2.520M	16.0	0.380	0.60
SS0804470KL□-□□□	47.0 \pm 10%	24	1K	2.520M	14.0	0.460	0.55
SS0804560KL□-□□□	56.0 \pm 10%	24	1K	2.520M	12.0	0.600	0.50
SS0804680KL□-□□□	68.0 \pm 10%	22	1K	2.520M	11.0	0.700	0.45
SS0804820KL□-□□□	82.0 \pm 10%	20	1K	2.520M	10.0	0.800	0.40
SS0804101KL□-□□□	100.0 \pm 10%	50	1K	796K	9.0	0.950	0.37
SS0804121KL□-□□□	120.0 \pm 10%	50	1K	796K	8.5	1.000	0.35
SS0804151KL□-□□□	150.0 \pm 10%	53	1K	796K	7.0	1.300	0.30
SS0804181KL□-□□□	180.0 \pm 10%	53	1K	796K	6.0	1.450	0.28
SS0804221KL□-□□□	220.0 \pm 10%	55	1K	796K	5.5	1.900	0.24
SS0804271KL□-□□□	270.0 \pm 10%	50	1K	796K	5.5	2.150	0.22
SS0804331KL□-□□□	330.0 \pm 10%	60	1K	796K	5.0	2.800	0.19
SS0804391KL□-□□□	390.0 \pm 10%	55	1K	796K	4.5	3.300	0.17
SS0804471KL□-□□□	470.0 \pm 10%	50	1K	796K	4.0	3.600	0.16

1). □ : Packaging information... [A]: Bulk [B]: Taping Reel

2). "-□□□": Reference code


SPECIFICATION FOR APPROVAL

REF :

PAGE: 3

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0804□□□□L□-□□□
		ABC'S ITEM NO.	

. INDUCTANCE VS. DC CURRENT CURVE :

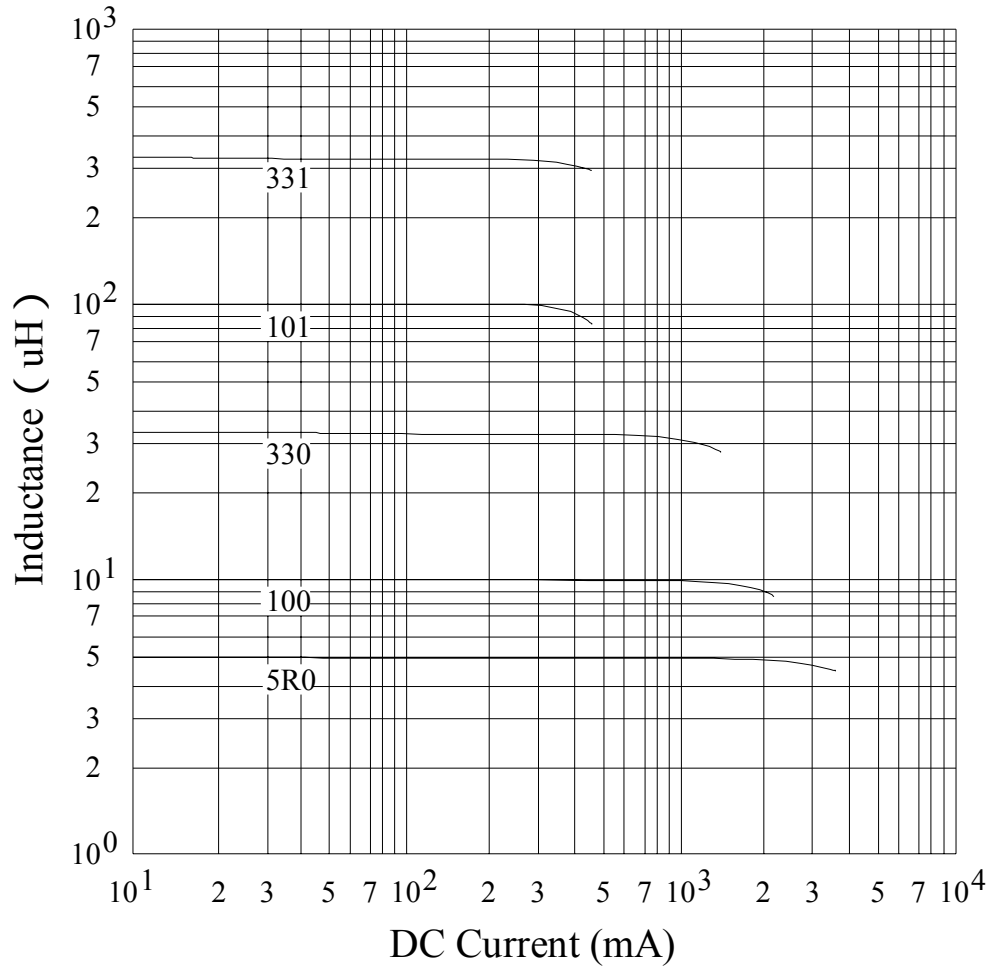

AE-001A



SPECIFICATION FOR APPROVAL



REF :

PAGE: 4

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0804□□□□L□-□□□
		ABC'S ITEM NO.	

PACKAGING INFORMATION :

(1) Configuration

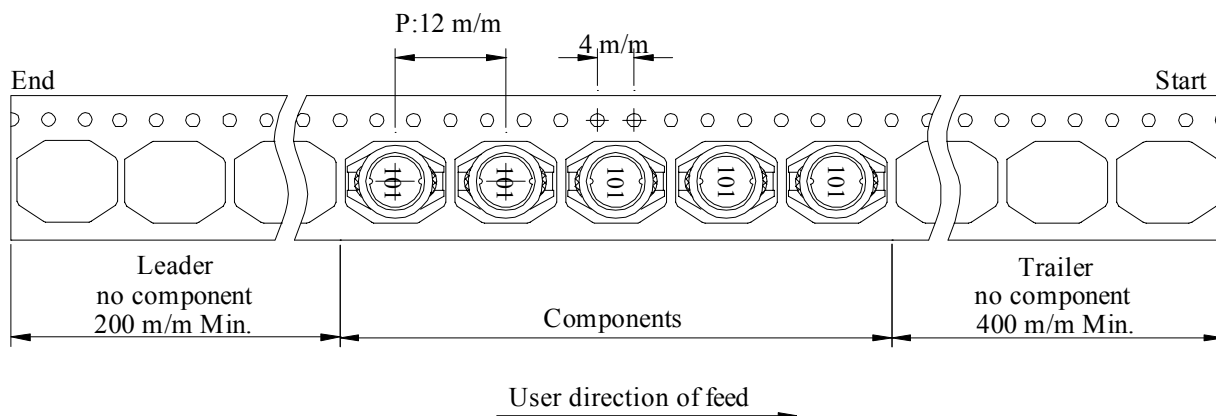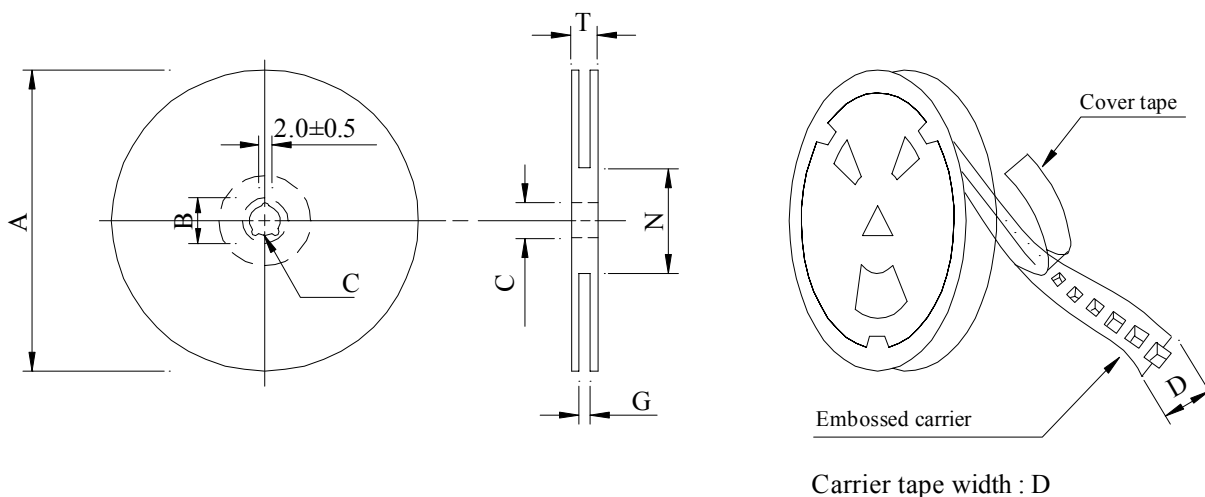

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
13 - 16	330	21±0.8	13	16	18 ⁺⁰	50 ⁻⁰	22.4

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
SS0804	1,000	1,100	13 - 16	6,000	7.5	40 x 40 x 24

AE-001A

SPECIFICATION FOR APPROVAL

REF :


PAGE: 6

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO. ABC'S ITEM NO.	SS0804□□□□L□-□□□
---------------	--------------------------------	---------------------------------	------------------

. RELIABILITY TEST :

Test item	Specification	Test condition						
Solderability	More than 90% of the terminal electrode shall be covered With fresh solder.	Preheat : 150±25 for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5 Flux : Rosin Dip time : 4±1 seconds						
Thermal shock test (Temp. cycle)	Inductance shall not change more than ±20%	<table style="width: 100%; border: none;"> <tr> <td style="border: none;">Room temp. 15 minutes</td> <td style="border: none; text-align: center;">→</td> <td style="border: none; text-align: center;">-25±2 30 minutes</td> </tr> <tr> <td style="border: none;">Room temp. 15 minutes</td> <td style="border: none; text-align: center;">→</td> <td style="border: none; text-align: center;">85±2 30 minutes</td> </tr> </table> <p>Total : 50 cycles</p>	Room temp. 15 minutes	→	-25±2 30 minutes	Room temp. 15 minutes	→	85±2 30 minutes
Room temp. 15 minutes	→	-25±2 30 minutes						
Room temp. 15 minutes	→	85±2 30 minutes						
Humidity Resistance test		Temperature : 40±2 Humidity : 90 ~ 95% Applied current : Per spec. Time : 500 hours						
High temp. Resistance test		Temperature : 105±2 Applied current : Per spec. Time : 500 hours						

AE-001A

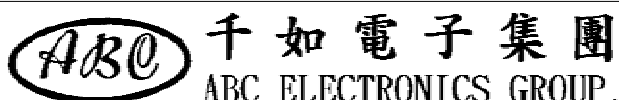

SPECIFICATION FOR APPROVAL

REF :

PAGE: 7

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0804□□□□L□-□□□
		ABC'S ITEM NO.	

. UL CARD :

OBMW2 September 8, 2000
Magnet Wire-Component
JUNG SHING WIRE CO LTD E174837
231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN
HSIEN TAIWAN

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	---	Polyamideimide	---	---	MW81-C	220
CFUEWB	---	Polyurethane	---	---	MW75C	130
EIAIW	---	Polyesterimide	---	Polyamideimide	MW35C	200
EILOCKY	---	Polyesterimide	---	Polyamide	---	180
EILOCKW	---	Polyesterimide	---	Modified Epoxy	---	200
EIW	---	Polyesterimide	---	---	---	220
EIW-2	---	Polyesterimide	---	---	MW74-C	200
FL.EILOCKY	---	Modified Polyester	---	Polyamide	---	155
LSFFW	---	Polyurethane	---	---	MW79-C	155
LSUEW	---	Polyurethane	---	---	---	130
PEW	---	Polyester	---	---	---	155
PEY	---	Polyester	---	Nylon	MW24-C	155
SF.FLW	---	Modified Polyester	---	---	MW26C	155
SF.EIW	---	Polyesterimide	---	---	MW77C	180
SF.BY@	---	Modified Polyester	---	Nylon	MW27-C	155
SF.FLY@	---	Modified Polyester	---	Nylon	MW27-C	155
SF.BLOCKBS	---	Modified Polyester	---	Modified Polyamide	---	155
SF.EILOCKY#	---	Polyesterimide	---	Polyamide	---	180
SF.EILOCKBS	---	Polyesterimide	---	Modified Polyamide	---	180
SF.BW@	---	Modified Polyester	---	---	MW26C	155
SFFW	---	Polyurethane	---	---	MW79	155

287806002 Page 1 of 2

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	---	Polyurethane	---	Polyamide	MW80C	155
UEW-1	---	Polyurethane	---	---	MW2-C	105
UEW-2	---	Polyurethane	---	---	---	130
UEW-4	---	Polyurethane	---	---	MW75C	130
UEY	---	Polyurethane	---	Nylon	MW28-C	130
UEY-2	---	Polyurethane	---	Polyamide	MW28-C	130

287806002 Page 2 of 2

OBMW2/E174837
September 8, 2000

A not-for-profit organization dedicated to public safety and committed to quality service

@-May be suffixed by LZ; # - May be suffixed by LZ, EL or LZI.
LZ - Signifies magened wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signifies base coated magnet wire twisted together and covered with top coat overall.
Marking: Company name or trademarks **JSW** or 榮星電線, material designation or marked designation on packaed or reel, and Recognized Component Mark.
See General Information Preceding These Recognitions
For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

AE-001A



SPECIFICATION FOR APPROVAL

REF :

PAGE: 8

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SS0804□□□□L□-□□□
		ABC'S ITEM NO.	

		SUMITOMO CHEMICAL CO LTD 5-33 KITAHAMA 4-CHOME CHUO-KO, OSAKA JAPAN						E54705 (M)			
Mtl Dsg	Col	Min Thk mm	UL94 Flame Class	RTI			H W I	H A I	H V T R	D 4 9 5	C T I
				Elec	Mech with Imp	w/o Imp					
Liquid crystal polyester (LCP), designated "EKONOL" or "SUMIKASUPER", furnished in the form of pellets, (Contd)											
E4008, E400X	NC, BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4
E4008	NC, WT, BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	220	180	220	3	4	—	—	—
		1.5	94V-0	220	200	240	2	4	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4
E4010	NC, BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	220	180	220	3	4	—	—	—
		1.5	94V-0	220	200	240	2	4	—	—	—
		3.0	94V-0	220	200	240	1	4	0	5	4
E400(Y)L, E4008L	NC, BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	130	130	130	3	4	—	—	—
		1.5	94V-0	130	130	130	2	4	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4
E4810	NC, BK	0.30	94V-0	130	130	130	—	—	—	—	—
		0.75	94V-0	130	130	130	0	4	—	—	—
		1.5	94V-0	130	130	130	0	4	—	—	—
		3.0	94V-0	130	130	130	1	4	0	5	4

(X) Denotes any number 1 thru 9.
(Y) Denotes any number 1 thru 7.

AE-001A

