

**SERIES**

**SPD73R & SPD74R  
SPD73 & SPD74**

RoHS  
Compliant

Traditional  
First Quality

DASH NUMBER\*



INDUCTANCE (μH) ±20%

TEST FREQUENCY (kHz)

DC RESISTANCE  
MAXIMUM (OHMS)

CURRENT RATING  
TYPICAL (AMPS)

**Shielded Surface Mount Inductors**

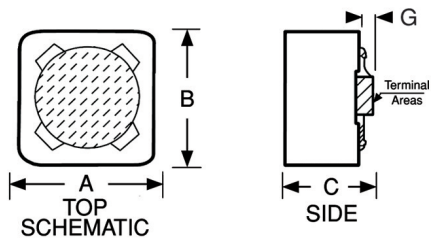

**Physical Parameters**

	Inches	Millimeters
A	0.287 ± .020	7.3 ± 0.5
B	0.287 ± .020	7.3 ± 0.5
C	0.185 Max.	4.7 Max. (Series SPD74)
C	0.153 Max.	3.9 Max. (Series SPD73)
D	0.200 ± 0.020	5.0 ± 0.5
E	0.088 ± 0.020	2.2 ± 0.5
F	0.042 ± 0.020	1.0 ± 0.5
G	0.015 Ref. only	0.38 Ref. only

**Mechanical Configuration** Units designed for surface mounting; ferrite core and ferrite sleeve

**Operating temperature range** -55°C to +125°C

**Application Frequency Range**  
Values 1.2μH to 10μH to 1.0 MHz Min.  
Values above 10μH to 300 kHz Min.

**Current Rating at 25°C Ambient** The maximum DC current that will cause a 40°C maximum temperature rise and where the inductance will not decrease by more than 10% from its zero DC value

**Marking** For values lower than 10 H the R indicates a decimal point and the remaining digits indicate the inductance in H. For values 10 H and above, the first two digits indicate the inductance in H and the third digit indicates the number of trailing zeros where a zero indicates that there are no trailing zeros.

Example: SPD73R-122M (1.2 H)  
1R2

Example: SPD74R-105M (1,000 H)  
102

**Packaging** Tape & reel (16mm):  
13" reel, 1000 pieces max.; 7" reel not available

**SERIES SPD73 FERRITE CORE & SLEEVE**

-122M	1.2	100	0.020	3.40
-242M	2.4	100	0.032	2.69
-352M	3.5	100	0.035	2.60
-472M	4.7	100	0.050	2.15
-682M	6.8	100	0.065	1.90
-103M	10	100	0.067	1.90
-123M	12	1.0	0.080	1.70
-153M	15	1.0	0.091	1.59
-183M	18	1.0	0.14	1.28
-223M	22	1.0	0.19	1.10
-273M	27	1.0	0.21	1.05
-333M	33	1.0	0.24	0.981
-393M	39	1.0	0.32	0.850
-473M	47	1.0	0.36	0.801
-563M	56	1.0	0.47	0.701
-683M	68	1.0	0.52	0.667
-823M	82	1.0	0.69	0.579
-104M	100	1.0	0.79	0.541
-124M	120	1.0	0.84	0.524
-154M	150	1.0	0.89	0.510
-184M	180	1.0	1.45	0.399
-224M	220	1.0	1.65	0.374
-274M	270	1.0	2.31	0.316
-334M	330	1.0	2.62	0.297
-394M	390	1.0	2.94	0.280
-474M	470	1.0	4.18	0.235
-564M	560	1.0	4.67	0.222
-684M	680	1.0	5.73	0.201
-824M	820	1.0	6.54	0.188
-105M	1000	1.0	9.44	0.156

**SERIES SPD74 FERRITE CORE & SLEEVE**

-122M	1.2	100	0.025	4.40
-242M	2.4	100	0.03	4.00
-352M	3.5	100	0.034	3.70
-472M	4.7	100	0.038	3.50
-682M	6.8	100	0.042	3.40
-103M	10	100	0.049	2.50
-123M	12	1.0	0.058	2.40
-153M	15	1.0	0.081	2.30
-183M	18	1.0	0.091	2.15
-223M	22	1.0	0.11	2.00
-273M	27	1.0	0.15	1.70
-333M	33	1.0	0.17	1.50
-393M	39	1.0	0.23	1.35
-473M	47	1.0	0.26	1.30
-563M	56	1.0	0.35	1.10
-683M	68	1.0	0.38	1.05
-823M	82	1.0	0.43	1.00
-104M	100	1.0	0.61	0.86
-124M	120	1.0	0.66	0.84
-154M	150	1.0	0.88	0.70
-184M	180	1.0	0.98	0.68
-224M	220	1.0	1.17	0.60
-274M	270	1.0	1.64	0.53
-334M	330	1.0	1.86	0.50
-394M	390	1.0	2.85	0.40
-474M	470	1.0	3.01	0.39
-564M	560	1.0	3.62	0.36
-684M	680	1.0	4.63	0.32
-824M	820	1.0	5.2	0.30
-105M	1000	1.0	6.0	0.28

\*Complete part # must include series # PLUS the dash #

For surface finish information, refer to [www.delevanfinishes.com](http://www.delevanfinishes.com)