

# Supercapacitors

## HV Series



### Description

Cooper Bussmann PowerStor supercapacitors are unique, ultra-high capacitance devices utilizing electrochemical double layer capacitor (EDLC) construction combined with new, high performance materials. This combination of advanced technologies allows Cooper Bussmann to offer a wide variety of capacitor solutions tailored to specific applications that range from a few micro-amps for several days to several amps for milliseconds.

### Features & Benefits

- Ultra low ESR for high power density
- Large capacitance for high energy density
- UL Recognized




Specifications	
Working Voltage	2.7V
Surge Voltage	3.0V
Capacitance	1.0F to 100F
Capacitance Tolerance	-10% to +30% (20°C)
Operating Temperature Range	-40°C to 65°C
Extended Operating Temperature Range	-40°C to 85°C (with linear voltage derating to 2.1V @ 85°C)

Standard Product							
Capacitance (F)	Part Number	Maximum ESR ( $\Omega$ ) (Equivalent Series Resistance) Measured @		Nominal Leakage Current ( $\mu$ A) After 72 Hrs. @ 20°C	Nominal Dimensions (mm)		Typical Mass (grams/piece)
		1kHz	100Hz		Diameter	Length	
1	HV0810-2R7105-R	0.15	0.20	10	8	10	1.2
3	HV0820-2R7305-R	0.060	0.080	15	8	20	1.4
5	HV1020-2R7505-R	0.038	0.040	20	10	20.5	2.3
6	HV0830-2R7605-R	0.038	0.040	20	8	30	2.1
10	HV1030-2R7106-R	0.032	0.034	23	10	30	3.2
15	HV1325-2R7156-R	0.028	0.030	23	13	26	4.5
25	HV1625-2R7256-R	0.025	0.027	45	16	25	7.3
35	HV1245-2R7356-R	0.018	0.020	51	12.5	45	8
35	HV1635-2R7356-R	0.022	0.024	51	16	35	9.3
60	HV1840-2R7606-R	0.016	0.018	110	18	40	13
100	HV1860-2R7107-R	0.010	0.012	260	18	60	20

Performance		
Parameter	Capacitance Change (% of initial specified value)	ESR (% of maximum initial ESR)
Life (1000 hrs @ 65°C @ 2.7Vdc)	≤ 30 %	≤ 200 %
Storage - Low and High Temperature (1000 hrs @ -40°C and 85°C)	≤ 30 %	≤ 200 %

Dimensions (mm)								
Part Number	D	D'	L	L'	F	d	C	C'
HV0810-2R7105-R	8.0	8.5	13.0	13.5	3.5	0.50	20.0	5.0
HV0820-2R7305-R	8.0	8.5	20.5	21.0	3.5	0.50	20.0	5.0
HV1020-2R7505-R	10.0	10.5	21.8	22.3	5.0	0.60	20.0	5.0
HV0830-2R7605-R	8.0	8.5	30.5	31.0	3.5	0.60	20.0	5.0
HV1030-2R7106-R	10.0	10.5	31.0	31.5	5.0	0.60	20.0	5.0
HV1325-2R7156-R	13.0	13.5	27.9	28.4	5.0	0.60	20.0	5.0
HV1625-2R7256-R	16.0	16.5	27.9	28.4	7.5	0.80	20.0	5.0
HV1245-2R7356-R	12.5	12.9	48.0	49.0	5.0	0.6	20.0	5.0
HV1635-2R7356-R	16.0	16.5	37.5	38.0	7.5	0.80	20.0	5.0
HV1840-2R7606-R	18.0	18.5	41.5	42.0	7.5	0.80	20.0	5.0
HV1860-2R7107-R	18.0	18.5	59.5	60.5	7.5	0.80	20.0	5.0
<i>Tolerances</i>	Maximum				± 0.5	± 0.02	Minimum	

Note: Longer lead is positive.

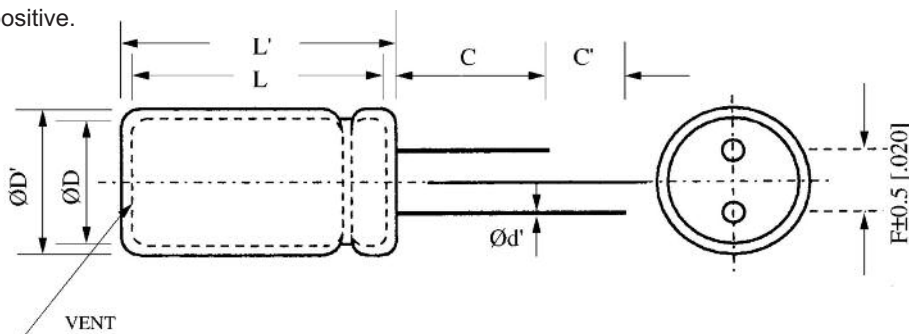

Part Numbering System						
HV			-	R		
Series Code	Dimensions (mm)			Voltage (V)	Capacitance (µF)	
HV Series	Diameter	Length		R is Decimal	Value	Multiplier
				2R7 = 2.7V	Example: 106 = 10 x 10 <sup>6</sup> µF or 10F	

### Packaging Information

**Packaging:**

- Standard packaging: Bulk, 100 units per bag.
- Larger bulk packages available on request.

### Part Marking

- Manufacturer
- Capacitance (F)
- Nominal Working Voltage (V)
- Series Code (or part number)
- Polarity

**North America**  
 Cooper Bussmann  
 1225 Broken Sound Parkway NW  
 Suite F  
 Boca Raton, FL 33487-3533  
 Tel: 1-561-998-4100  
 Fax: 1-561-241-6640  
 Toll Free: 1-888-414-2645

Cooper Bussmann  
 P.O. Box 14460  
 St. Louis, MO 63178-4460  
 Tel: 1-636-394-2877  
 Fax: 1-636-527-1607

**Europe**  
 Cooper Bussmann  
 Cooper (UK) Limited  
 Burton-on-the-Wolds  
 Leicestershire • LE12 5TH UK  
 Tel: +44 (0) 1509 882 737  
 Fax: +44 (0) 1509 882 786

Cooper Bussmann  
 Avda. Santa Eulalia, 290  
 08223  
 Terrassa, (Barcelona), Spain  
 Tel: +34 937 362 812  
 +34 937 362 813  
 Fax: +34 937 362 719

**Asia Pacific**  
 Cooper Bussmann  
 1 Jalan Kilang Timor  
 #06-01 Pacific Tech Centre  
 Singapore 159303  
 Tel: +65 278 6151  
 Fax: +65 270 4160

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.