


# G100E Series

## Low Cost, 1W MiniDIP Single & Dual Output DC/DC Converters

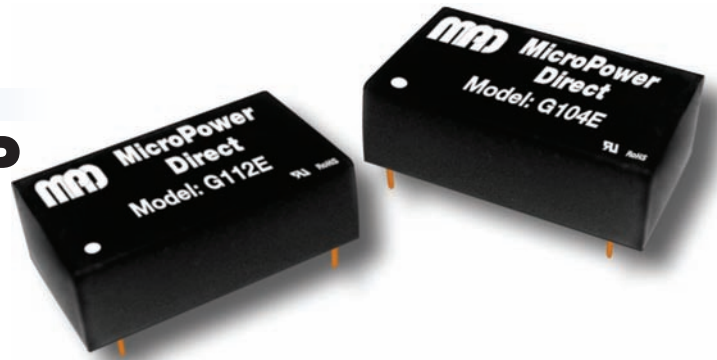

### Key Features:

- 1W Output Power
- Compact "MiniDIP" Case
- EN 60950 Approved (UL)
- Single & Dual Outputs
- 1,000 VDC Isolation
- >3.5 MHour MTBF
- 24 Standard Models
- **LOWEST COST!!**



### MicroPower Direct

292 Page Street  
Suite D  
Stoughton, MA 02072  
USA

T: (781) 344-8226  
F: (781) 344-8481  
E: sales@micropowerdirect.com  
W: www.micropowerdirect.com



### Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

#### Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	5 VDC Input	4.5	5.0	5.5	VDC
	12 VDC Input	10.8	12.0	13.2	
	24 VDC Input	21.6	24.0	26.4	
Input Filter	Internal Capacitor				
Reverse Polarity Input Current				0.3	A

#### Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			±1.0	±3.0	%
Output Voltage Balance	Dual Output, Balanced Loads		±0.1	±1.0	%
Line Regulation	For Vin Change of 1%		±1.2		%
Load Regulation, See Note 1	See Model Selection Guide				
Ripple & Noise (20 MHz)	Single Output, See Note 3		75	100	mV P - P
	Dual Output, See Note 3		50	750	
Output Power Protection		120			%
Temperature Coefficient			±0.02	±0.03	%/°C
Output Short Circuit	Momentary (1.0 Sec.)				

#### General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	1,000			VDC
Isolation Resistance	500 VDC	1,000			MΩ
Isolation Capacitance	100 kHz, 1V		60		pF
Switching Frequency			100		kHz

#### Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+85	°C
Storage Temperature Range		-55		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

#### Physical

Case Size	0.79 x 0.39 x 0.28 Inches (20.0 x 10.0 x 7.0 mm)				
Case Material	Non-Conductive Black Plastic (UL94-V0)				
Weight	0.07 Oz (2.1g)				

#### Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	3.5			MHours
Safety Standards	UL 1950, EN 60950				
Safety Approvals	UL, cUL; File No. E245422				

#### Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	5 VDC Input	-0.7		9.0	VDC
	12 VDC Input	-0.7		18.0	
	24 VDC Input	-0.7		30.0	
Lead Temperature	1.5 mm From Case For 10 Sec			300	°C
Internal Power Dissipation	All Models			450	mW

**Caution:** Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

[www.micropowerdirect.com](http://www.micropowerdirect.com)

Model Number	Input				Output			Load Regulation (% Max)	Efficiency (% Typ)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)		Voltage (VDC)	Current (mA, Max)	Current (mA, Min)			
	Nominal	Range	Full-Load	No-Load						
G101E	5	4.5 - 5.5	286	30	5.0	200.0	20.0	15	70	500
G102E	5	4.5 - 5.5	256	30	9.0	111.0	12.0	15	78	500
G103E	5	4.5 - 5.5	256	30	12.0	83.0	9.0	15	78	500
G104E	5	4.5 - 5.5	250	30	15.0	67.0	7.0	15	80	500
G105E	5	4.5 - 5.5	278	30	±5.0	±100.0	±10.0	15	72	500
G106E	5	4.5 - 5.5	260	30	±9.0	±56.0	±6.0	15	77	500
G107E	5	4.5 - 5.5	253	30	±12.0	±42.0	±5.0	15	79	500
G108E	5	4.5 - 5.5	250	30	±15.0	±33.0	±4.0	15	80	500
G111E	12	10.8 - 13.2	117	15	5.0	200.0	20.0	15	71	200
G112E	12	10.8 - 13.2	109	15	9.0	111.0	12.0	15	76	200
G113E	12	10.8 - 13.2	107	15	12.0	83.0	9.0	15	78	200
G114E	12	10.8 - 13.2	105	15	15.0	67.0	7.0	15	79	200
G115E	12	10.8 - 13.2	116	15	±5.0	±100.0	±10.0	15	72	200
G116E	12	10.8 - 13.2	107	15	±9.0	±56.0	±6.0	15	78	200
G117E	12	10.8 - 13.2	105	15	±12.0	±42.0	±5.0	15	79	200
G118E	12	10.8 - 13.2	107	15	±15.0	±33.0	±4.0	15	78	200
G121E	24	21.6 - 26.4	57	8	5.0	200.0	20.0	15	73	100
G122E	24	21.6 - 26.4	53	8	9.0	111.0	12.0	15	78	100
G123E	24	21.6 - 26.4	53	8	12.0	83.0	9.0	15	78	100
G124E	24	21.6 - 26.4	52	8	15.0	67.0	7.0	15	79	100
G125E	24	21.6 - 26.4	57	8	±5.0	±100.0	±10.0	15	73	100
G126E	24	21.6 - 26.4	52	8	±9.0	±56.0	±6.0	15	79	100
G127E	24	21.6 - 26.4	52	8	±12.0	±42.0	±5.0	15	80	100
G128E	24	21.6 - 26.4	52	8	±15.0	±33.0	±4.0	15	80	100


Other input/output combinations are available (i.e. 3.3 VDC). Contact the factory for details at: [sales@micropowerdirect.com](mailto:sales@micropowerdirect.com)

**Notes:**


- Output load regulation is specified for a load change of 10% to 100%.
- These units should not be operated with a load under 10% of full load. Operation at no-load may cause damage to the unit.
- These converters will operate without external components. However, when measuring output ripple, it is recommended that an external ceramic capacitor be placed from the +Vout pin to the -Vout pin for single output units and from each output to common for dual output units. An input capacitor will enhance stability over temperature and input line variations. Recommended capacitor values are given in the table above. For applications requiring very low output noise levels, a simple LC filter should be effective.
- Dual output units may be connected to provide a 10V, 18V, 24V or 30 VDC output. To do this, connect the load across the positive (+Vout) and negative (-Vout) outputs and float the output common.
- It is recommended that a fuse be used on the input of a power supply for protection. See the Model Selection table above for the correct rating.

Vin	Input Capacitor	Vout	Output Capacitor	
			Single	Dual
5 VDC	4.7 µF	5 VDC	10.0 µF	4.7 µF
12 VDC	2.2 µF	9 VDC	4.7 µF	2.2 µF
24 VDC	1.0 µF	12 VDC	2.2 µF	1.0 µF
		15 VDC	1.0 µF	0.47 µF

**Derating Curve**

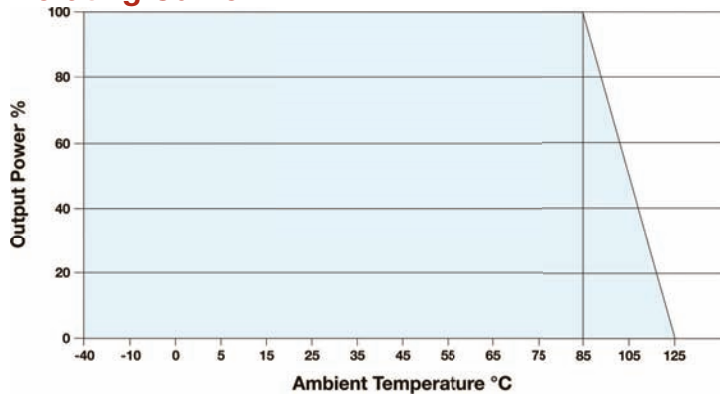

**Mechanical Dimensions**

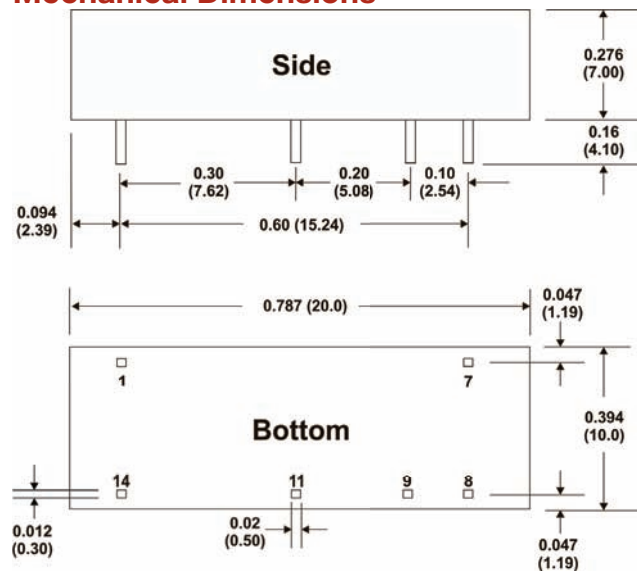

**Pin Connections**

Pin	Single	Dual	Pin	Single	Dual
1	-Vin	-Vin	9	+Vout	+Vout
7	NC	NC	11	No Pin	-Vout
8	-Vout	Common	14	+Vin	+Vin

NC = No Connection

**Notes:**

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.01 (±0.25)
- Pin 1 is marked by a "dot" or indentation on the top of the unit



**MicroPower Direct**

**We Power Your Success - For Less!**