


● **FEATURES**

- \* **625mW POWER DISSIPATION**
- \* **I<sub>C</sub> CONT 3A**
- \* 12A Peak Pulse Current
- \* Excellent H<sub>FE</sub> Characteristics Up To 12A (pulsed)
- \* Extremely Low Saturation Voltage E.g. 8mV Typ.
- \* Extremely Low Equivalent On Resistance; **R<sub>CE(sat)</sub>**

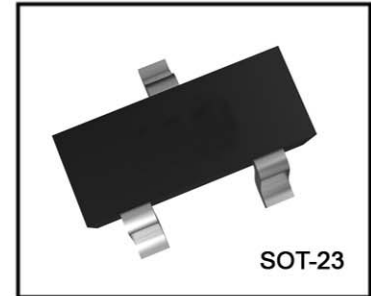

DEVICE TYPE	COMPLEMENT	PARTMARKING	R <sub>CE(sat)</sub>
FMMT617	FMMT717	617	<b>50mΩ at 3A</b>
FMMT618	FMMT718	618	<b>50mΩ at 2A</b>
FMMT619	FMMT720	619	<b>75mΩ at 2A</b>
FMMT624	FMMT723	624	-
FMMT625	-	625	-

● **ABSOLUTE MAXIMUM RATINGS.**

PARAMETER	SYMBOL	FMMT 617	FMMT 618	FMMT 619	FMMT 624	FMMT 625	UNIT
Collector-Base Voltage	V <sub>CBO</sub>	15	20	50	125	150	V
Collector-Emitter Voltage	V <sub>CEO</sub>	15	20	50	125	150	V
Emitter-Base Voltage	V <sub>EBO</sub>	5	5	5	5	5	V
Peak Pulse Current**	I <sub>CM</sub>	12	6	6	3	3	A
<b>Continuous Collector Current</b>	<b>I<sub>C</sub></b>	<b>3</b>	<b>2.5</b>	<b>2</b>	<b>1</b>	<b>1</b>	<b>A</b>
Base Current	I <sub>B</sub>	500					mA
<b>Power Dissipation at T<sub>amb</sub>=25°C*</b>	<b>P<sub>tot</sub></b>	<b>625</b>					<b>mW</b>
Operating and Storage Temperature Range	T <sub>j</sub> ;T <sub>stg</sub>	-55 to +150					°C

\* Maximum power dissipation is calculated assuming that the device is mounted on a ceramic substrate measuring 15x15x0.6mm

\*\*Measured under pulsed conditions. Pulse width=300μs. Duty cycle ≤ 2%  
Spice parameter data is available upon request for these devices

SK MAKE CONSCIOUS PRODUCT

CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE




● **ELECTRICAL CHARACTERISTICS (at  $T_{amb} = 25^{\circ}C$  unless otherwise stated).**

PARAMETER	SYMBOL	FMMT618			FMMT619			UNIT	CONDITIONS.
		MIN.	TYP.	MAX.	MIN.	TYP.	MAX.		
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	20	100		50	190		V	$I_C=100\mu A$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	20	27		50	65		V	$I_C=10mA^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5	8.3		5	8.3		V	$I_E=100\mu A$
Collector Cut-Off Current	$I_{CBO}$			100			100	nA nA	$V_{CB}=16V$ $V_{CB}=40V$
Emitter Cut-Off Current	$I_{EBO}$			100			100	nA	$V_{EB}=4V$
Collector Emitter Cut-Off Current	$I_{CES}$			100			100	nA nA	$V_{CES}=16V$ $V_{CES}=40V$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		8 70 130	15 150 200		10 125 150	20 200 220	mV mV mV mV	$I_C=0.1A, I_B=10mA^*$ $I_C=1A, I_B=10mA^*$ $I_C=2A, I_B=50mA^*$ $I_C=2.5A, I_B=50mA^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		0.89	1.0		0.87	1.0	V V	$I_C=2A, I_B=50mA^*$ $I_C=2.5A, I_B=50mA^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		0.79	1.0		0.80	1.0	V V	$I_C=2A, V_{CE}=2V^*$ $I_C=2.5A, V_{CE}=2V^*$
Static Forward Current Transfer Ratio	$h_{FE}$	200 300	400 450		200 300 200 100	400 450 400 225 40			$I_C=10mA, V_{CE}=2V^*$ $I_C=200mA, V_{CE}=2V^*$ $I_C=1A, V_{CE}=2V^*$ $I_C=2A, V_{CE}=2V^*$ $I_C=6A, V_{CE}=2V^*$
Transition Frequency	$f_T$	100	140		100	165		MHz	$I_C=50mA, V_{CE}=10V$ $f=100MHz$
Output Capacitance	$C_{obo}$		23	30		12	20	pF	$V_{CB}=10V, f=1MHz$
Turn-On Time	$t_{(on)}$		170			170		ns	$V_{CC}=10V, I_C=1A$
Turn-Off Time	$t_{(off)}$		400			750		ns	$I_{B1}=-I_{B2}=10mA$


\*Measured under pulsed conditions. Pulse width=300 $\mu$ s. Duty cycle  $\leq$  2%




**TYPICAL CHARACTERISTICS**

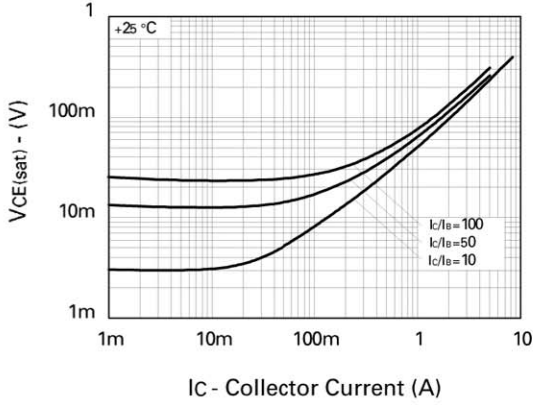


**$V_{CE(SAT)}$  v  $I_C$**

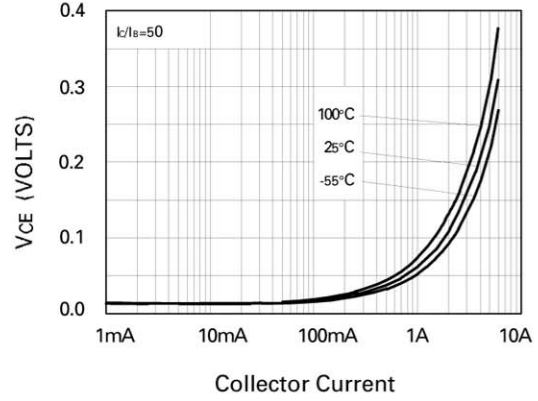


**$V_{CE(SAT)}$  vs  $I_C$**

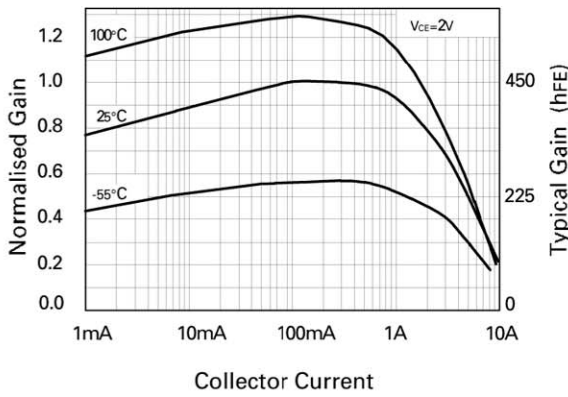


**hFE vs  $I_C$**

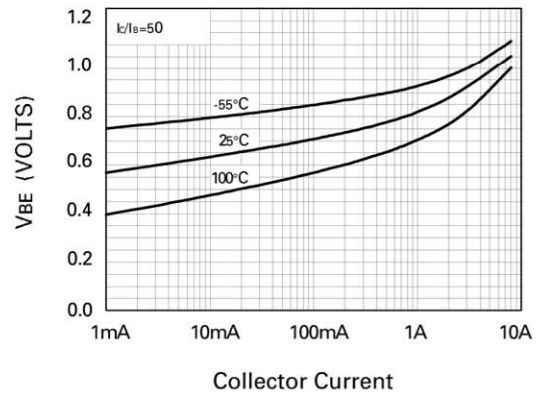

**$V_{BE(SAT)}$  vs  $I_C$**

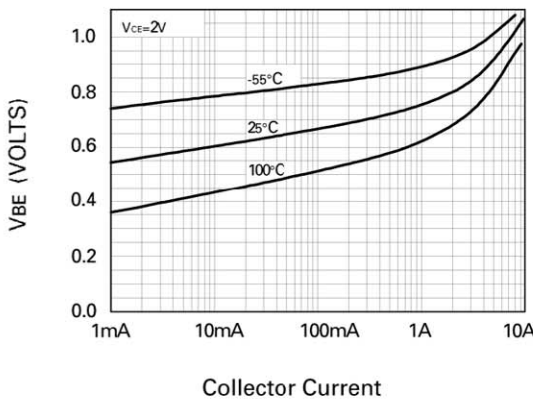

**$V_{BE(ON)}$  vs  $I_C$**

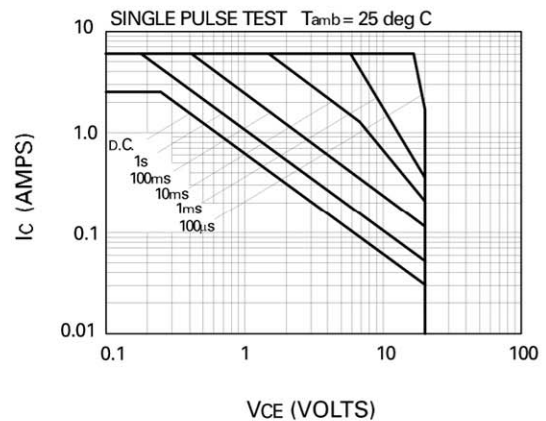


**Safe Operating Area**


SK MAKE CONSCIOUS PRODUCT  
CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE



**THERMAL CHARACTERISTICS AND DERATING INFORMATION**

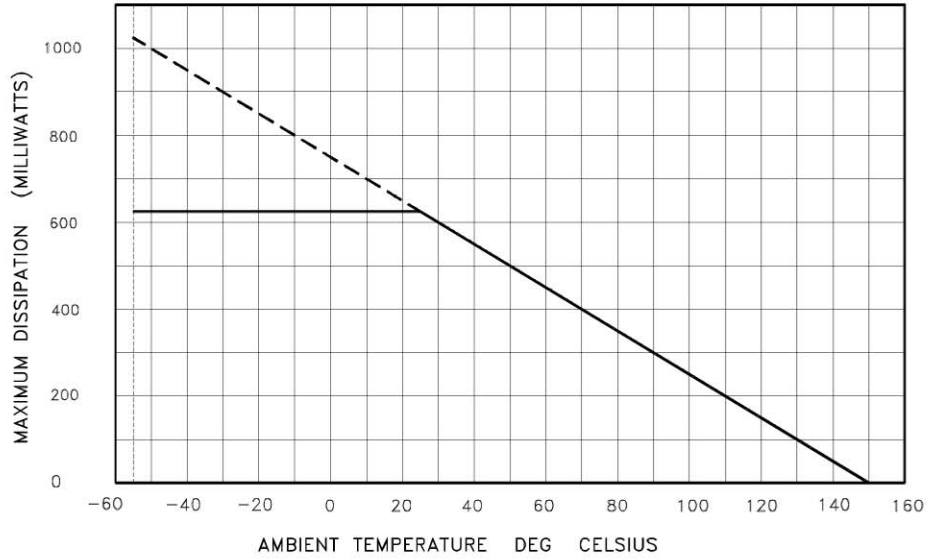

**DERATING CURVE**

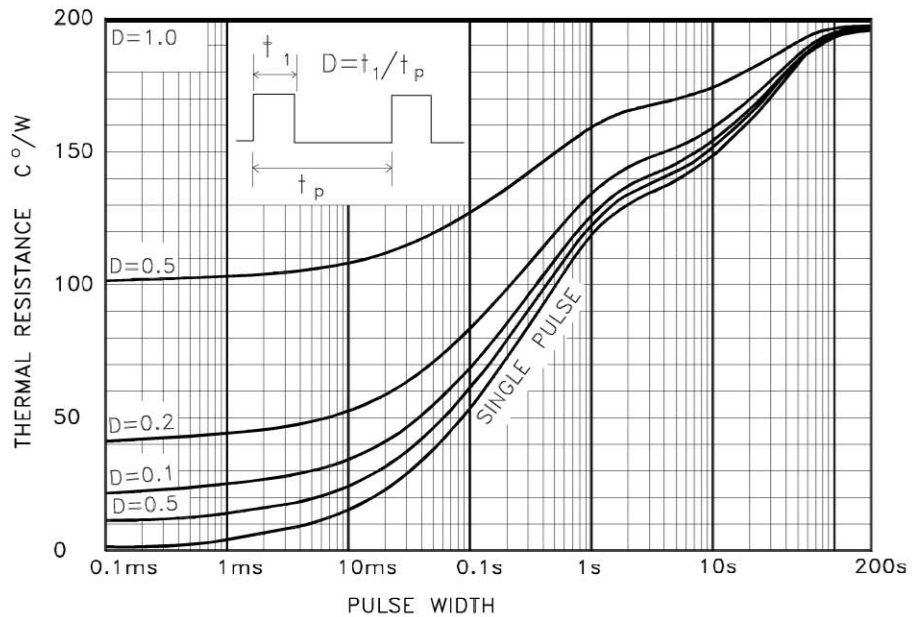

**MAXIMUM TRANSIENT THERMAL RESISTANCE**

\* Reference above figures, Devices were mounted on a 15mmx15mm ceramic substrate

