

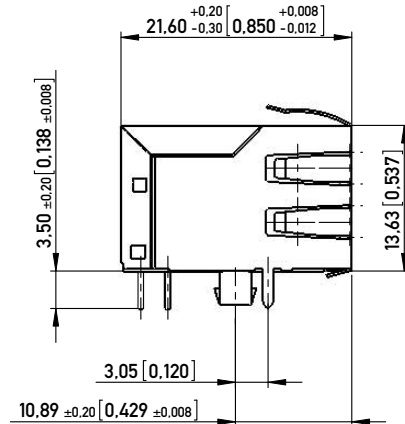




STANDOFF  
ABSTAND

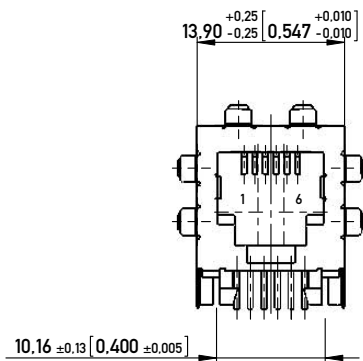

RECOMMENDED PANEL CUTOUT  
EMPFOHLENER FRONTPLATTEN-AUSSCHNITT

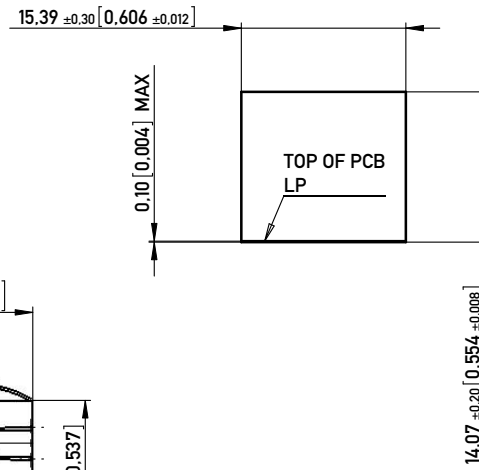

RECOMMENDED PCB LAYOUT (COMPONENT SIDE VIEW)  
EMPFOHLENES LEITERPLATTEN-LAYOUT (BESTUECKUNGSSEITE)  
TOL. ±0.05 [0.002] UNLESS NOTED

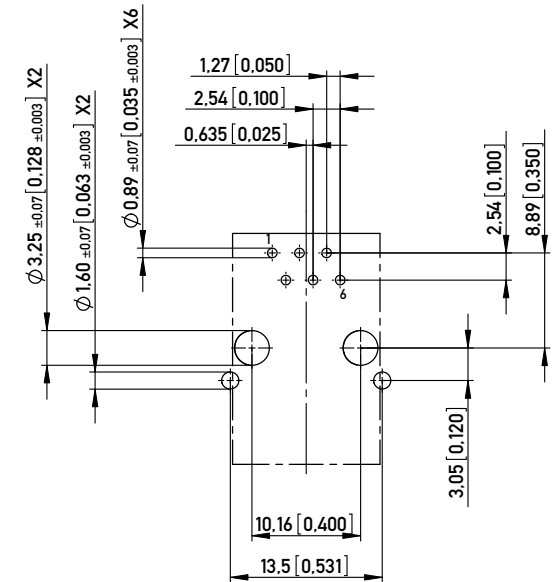

1:1

NOTE 1: PANEL GROUND FLANGES TOP, SIDES AND BOTTOM (GF5)  
NOTE 2: RoHS COMPLIANT

Technical specifications

Materials & Finish	Standard applic.	Value
Insulation body	Standard description	PBT 30%
Contact material	Standard description	CuSn5
Contact finish, mating zone	Thickness of plating	30 µin Au over 50 µin Ni
Contact finish termination zone	Thickness of plating	30 µin Au over 50 µin Ni
Shell/shield material	Standard description	C2680 (acc. JIS)
Shell/shield plating	Thickness of plating	50 µin Ni

Assembly process		
Packaging	Tray	
Solder temperature	235°C at 3-5s	
Suitable assembly process	wave	

Approvals		
UL insulation body	UL 94	V0
UL File No.		E145613
RoHS compliant		Yes

Test Data	Standard applic.	Value
<b>Mechanical properties</b>		
Insertion/withdrawal force	IEC 603-7	max. 20 N
Mechanical operations	IEC 512-5, 9a	min. 1.000
Effectiveness of connector coupling device	IEC 512-8, 15f	50 N

<b>Electrical properties</b>		
<b>Creepage / clearance distances</b>		
a) Contact - contact	IEC 807-3	0.57 mm
b) Contact - shell	IEC 807-3	min. 1.0 mm
<b>Voltage proof (Dielectric Withstand Voltage)</b>		
a) Contact - contact	IEC 512-2, 4a	min. 1.000 V AC/DC
b) Contact - shell/testpanel	IEC 512-2, 4a	min. 1.500 V AC/DC
Current carrying capacity	IEC 512-3, 5b	1.5 A @ 25° C
Contact resistance	IEC 512-2, 2a	max. 30 mOhm
Insulation resistance	IEC 512-2, 3a	min. 500 MOhm

<b>Environmental properties</b>		
Operation temperature		0 - 70° C

PART NO. IDENT. NR.	CONTACT FINISH TERMINATION ZONE
<b>133776</b>	<b>ROUND WIRE CONTACTS 30µin Au OVER 50µinNi</b>

Information:	Tolerances	All Dimensions in mm (in)	Scale 2:1
All rights reserved. Only for Information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation	
		<b>MOD JACK 6P6C, 1X1, SHIELDED</b>	
www.ERNI.com	<b>133776</b>	1 (1/1)	A3
C	19.08.2008	Class	MJ
Index	Date		

Copyright by ERNI GmbH  
Proprietary notice pursuant to ISO 16016 to be observed.